

# MVDC link in a 33 kV distribution network

Chao Long<sup>1</sup> ✉, Jianzhong Wu<sup>1</sup>, Kevin Smith<sup>2</sup>, Andrew Moon<sup>3</sup>,  
Russell Bryans<sup>4</sup>, James Yu<sup>2</sup>

<sup>1</sup>Cardiff University, Cardiff, UK

<sup>2</sup>SP Energy Networks, Birkenhead, UK

<sup>3</sup>EA Technology, Chester, UK

<sup>4</sup>TNEI Services, Manchester, UK

✉ E-mail: chao.long.10@gmail.com

**Abstract:** The performance of a 33 kV distribution network with a proposed medium-voltage DC (MVDC) link between the island of Anglesey and the mainland in North Wales was assessed. The MVDC link, which will be constructed as part of the Ofgem Electricity Network Innovation Competition project ANGLE-DC, was simulated under a wide range of demand and generation, with control strategies based on real-time data from the three 132/33 kV grid transformers (GTs) that supply the island network or the wider supervisory control and data acquisition (SCADA) system. The active power set points of the MVDC link for the GT data-based control were determined by a sensitivity analysis of the network losses. For a wider SCADA system-based control, optimal set points were obtained using an optimal power flow method. The network losses and hosting capacity of distribution generation (DG) were assessed considering both normal network and  $N-1$  conditions. This study found that the use of the MVDC link increased the DG hosting capacity of the network, but network losses might be increased or reduced depending on the load and generation conditions, and control strategies.

## 1 Introduction

UK electricity distribution networks need to adapt for the future energy scenarios which aims to reduce carbon emissions, in the power sector, to near zero by 2050 [1]. Distributed generation (DG) capacity is predicted to nearly double to ~21.8 GW in GB by 2035 [2]. The UK Carbon Plan promotes the electrification of heating and transport and the use of renewable energy sources, which will mainly be connected to distribution networks. Consequently, distribution network operators (DNOs) face a challenge to accommodate significant demand and DG growth. Thus, potentially extensive and expensive reinforcement of the distribution networks may be required.

Conventional circuit reinforcement typically involves significant costs and additional land requirements. Obtaining way-leave agreements or easements could directly affect the lead time of distribution network expansion schemes. This may also result in lengthy lead times for renewable connections. Solutions for future distribution networks need to make the most efficient use of existing assets, thus potentially deferring or avoiding the need for network reinforcement.

Most GB distribution systems are traditionally operated radially; neighbouring networks are not operated with interconnection, as coupling distribution systems may result in thermal ratings, fault level limits and permissible voltage levels being exceeded. However, a direct and controlled power exchange between distribution systems allows the transfer of the excessive power generated by DGs to other load centres. A reliable and controlled interconnection between distribution systems could potentially reduce network losses, enhance the reliability of the system, and reduce customer interruptions by increasing the power supply paths.

Renewable resources are intermittent and their export does not necessarily coincide with local demand. This along with the inherent uncertainty of generation and demand requires future distribution networks to be flexible and controllable. Technical challenges include a combination of thermal overloading, voltage excursions and breaching fault level limits. These challenges result in delays and restrictions on the connection of low carbon generation.

Medium-voltage DC (MVDC) links have been identified as a potential enabler to mitigate these issues. The use of MVDC technology has the potential to provide rapid control of voltage and power flows and so increase the capacity of networks to transport power. MVDC has not, so far, been used in distribution networks in the UK and this work offers an early opportunity to investigate its use and benefits.

## 2 ANGLE-DC project

Office of Gas and Electricity Markets (Ofgem) awarded funding for the ANGLE-DC project in November 2015, as an Electricity Network Innovation Competition project [3]. ANGLE-DC (initiated by SP Energy Networks) aims to demonstrate the application of MVDC technology by converting an existing 33 kV AC double circuit to a symmetrical monopole DC circuit; each AC circuit becomes one pole, operating at  $\pm 27$  kV DC. The double circuit is between Llanfair PG substation on Anglesey Island, and Bangor substation on the mainland in North Wales. An AC/DC converter station will be installed at each end of the circuit. The existing AC circuit consists of underground cables and an overhead line, and the total length is ~3 km.

### 2.1 Anglesey network issues

The 33 kV system on Anglesey is currently approaching both thermal and voltage limits. The demand in Anglesey is anticipated to increase significantly over the next 10 years due to various regeneration and development projects by the Welsh Government and the Horizon Nuclear Power station development. The level of requests for generation connection in the area is extremely high and it is anticipated to double over the next few years. Fig. 1 shows the 33 kV circuits in Anglesey and the nearby mainland, and each green dot is a 33/11 kV substation.

A 33 kV circuit, connecting Llanfair PG to other parts of the North Wales distribution network (Bangor), has been identified as a location where uncontrolled power flows are forecast to exceed



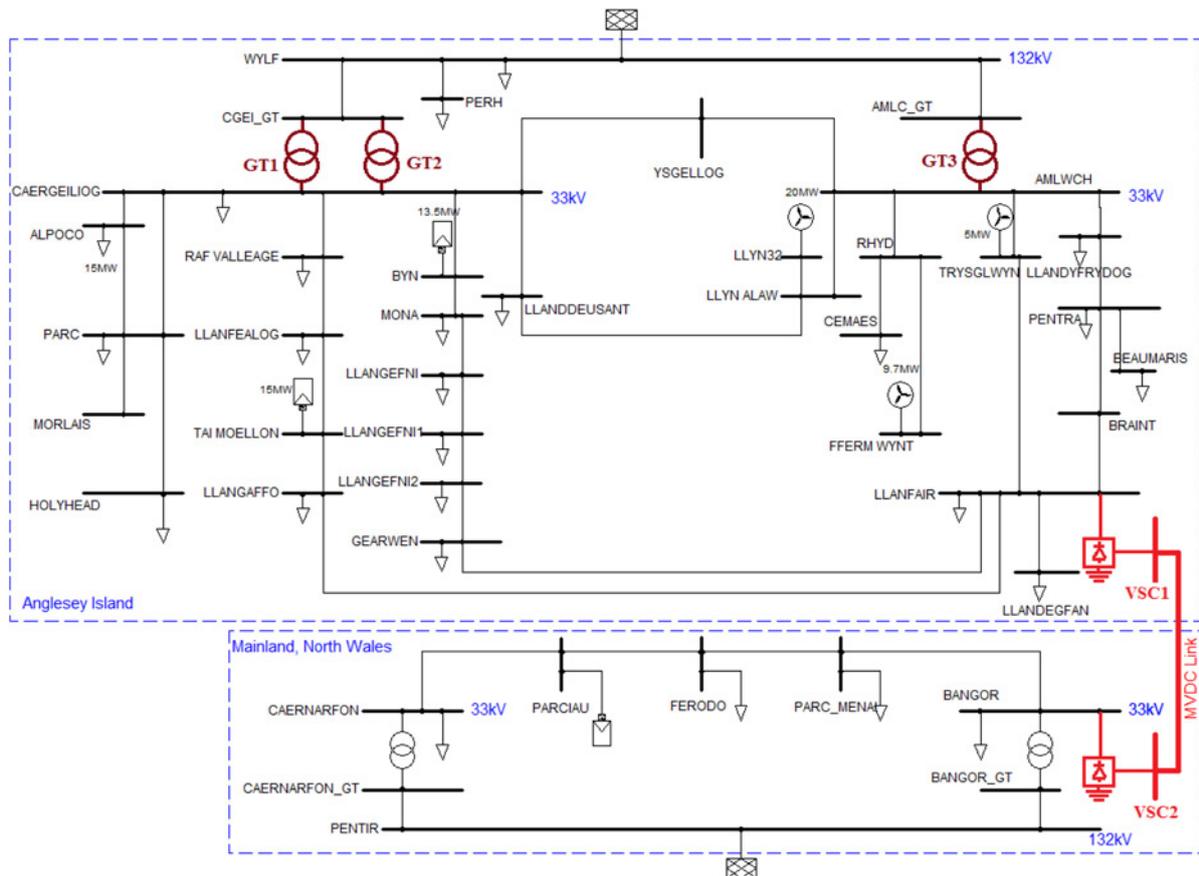


Fig. 2 Thirty-three kilovolt network circuit on Anglesey, UK

Table 1 Net load on the Anglesey network

		Demand, MW				
		SMIN	SMAX	WMAX	Wmax2019	Wmax2023
		25	38	75	78	82
generation, MW	0	25	38	75	78	82
	31	-6	7	44	47	51
	63	-38	-25	12	15	19
	94	-69	-56	-19	-16	-12
	125	-100	-87	-50	-47	-43

export of active power from Anglesey to North Wales, and positive values indicate import power from North Wales to Anglesey. The voltage set point at both converter stations was set as 1 pu.

Fig. 3 shows the power losses of Anglesey network without DG and with different active power set points of the MVDC link. For each load, the set point which resulted in the minimum network losses is shown in the first row of Table 2. Four additional sets of values were obtained for the remaining DG scenarios.

**4.1.2 MVDC link active power set point:** Fig. 4 shows the operation curve for the active power set points using the GT data-based control. This curve was obtained by a linear approximation of the results shown in Table 2. The least squares method was used for the linear approximation to find the most appropriate operation curve. It shows that the active power set points were between -15 and 25 MW. For maximum generation and minimum load, the MVDC link exports ~15 MW to the mainland; for minimum generation and maximum load, the MVDC link imports ~25 MW to Anglesey. The more frequent


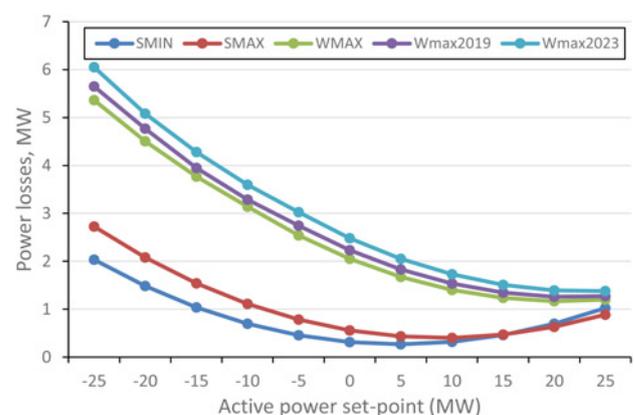


Fig. 3 Anglesey network power losses at 0 MW DG

**Table 2** Active power set point of MVDC link resulted from the sensitivity analysis of network losses

		Demand, MW				
		SMIN	SMAX	WMAX	Wmax2019	Wmax2023
		25	38	75	78	82
generation, MW	0	5	10	20	25	25
	31	0	5	20	20	25
	63	-5	0	15	15	15
	94	-10	-5	10	10	10
	125	-15	-10	5	5	5

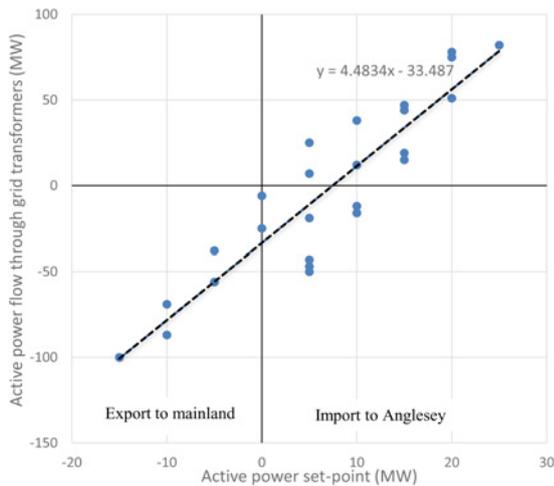

**Fig. 4** Operation curve for active power set-points using the GT data-based control

behaviour of the MVDC link is to import power from North Wales to Anglesey.

#### 4.2 Wider SCADA system-based control


Optimal set points of the active power of the MVDC link, and reactive power of both terminals were found [5]. The objective was to minimise the total losses of the Anglesey 132 and 33 kV networks. The constraints included the voltage and thermal limits, maximum and minimum of the active and reactive power of the MVDC link.

### 5 Control strategy comparison

Performances of the network with the MVDC link operating with GT data only and a wider SCADA system-based control strategies were compared with the business as usual (BAU) case (i.e. an AC connection between Llanfair PG and Bangor).

#### 5.1 Network losses

Network losses were examined under a wide range of demand and generation scenarios, and with different control strategies. It was found that under scenarios of low and medium levels of DG, the GT data-based control resulted in increased network losses compared to the case with AC link, as seen in Figs. 5a and b. This is due to the reactive power injections by the two converter stations. For higher DG, the GT data-based control had reduced losses compared to the case with AC link, as shown in Fig. 5c. The wider SCADA-based control always resulted in the minimum network losses among the three cases.

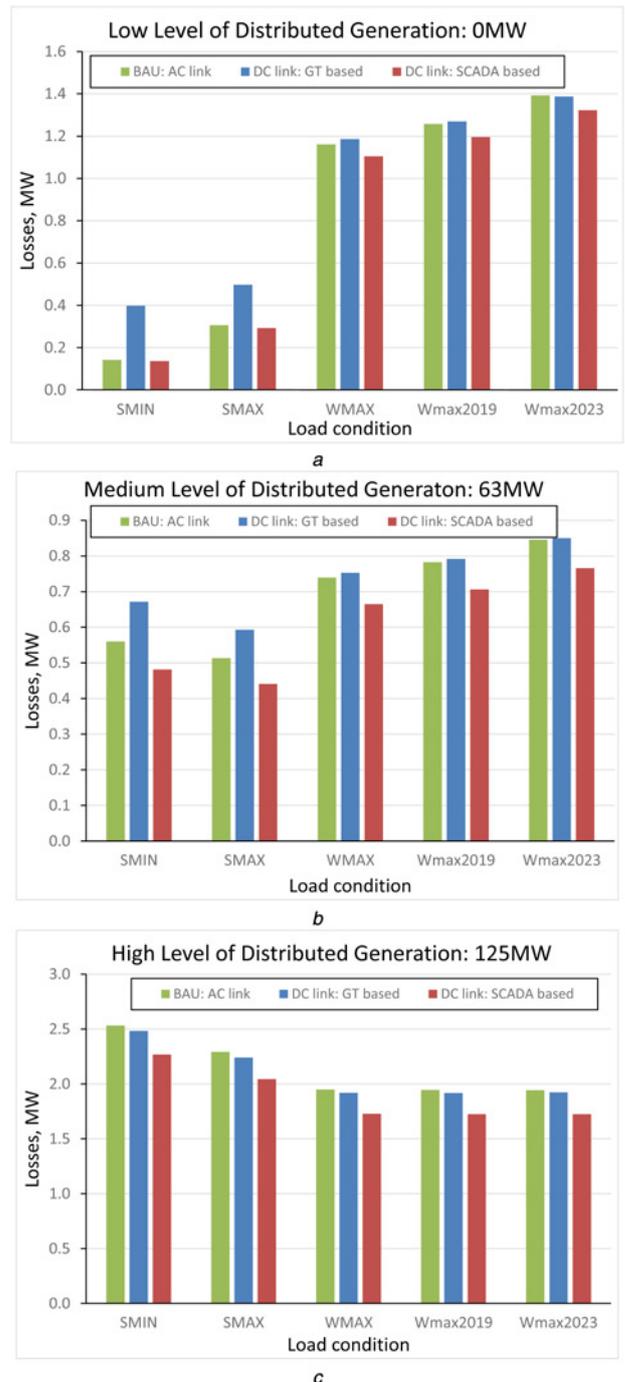

**Fig. 5** Anglesey network losses in different load and DG conditions (a) Low level of distributed generation: 0, (b) Medium level of distributed generation: 63MW, (c) High level of distributed generation: 125 MW

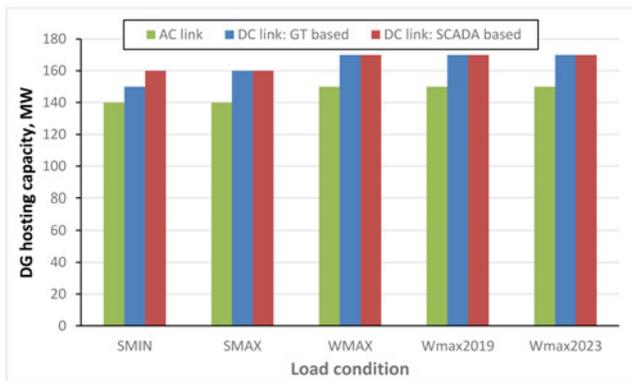


Fig. 6 Anglesey network's DG hosting capacity

### 5.2 Network's DG hosting capacity

The use of the MVDC link increased the network hosting capacity, regardless the control strategies used. Despite the GT data-based control resulting in more losses than the wider SCADA system-based control, they provide similar headroom capacity for the Anglesey network to host DG (Fig. 6).

## 6 Network N–1 condition

Performance of the network was also assessed under the N–1 conditions. It was found that import or export flows of  $>\pm 20$  MW started to risk thermal constraints under the N–1 condition. This

affected the operation set points for minimum generation and maximum load. This has minor influence on the network loss analysis.

## 7 Conclusions

The network performance of an MVDC link in a 33 kV distribution network was investigated. This work found that the use of an MVDC link increased the DG hosting capacity of the MV network, but the network losses depend on the load and generation conditions and control strategy. A GT data-based control might result in increased network losses, due to its injection of reactive power for voltage support, whereas a wider SCADA system-based control results in minimum network losses. However, the controller has to fall back to the GT data-based control when there is loss of communication between the converter controller and the wider SCADA system.

## 8 References

- 1 Department of Energy and Climate Change, HM Government: 'The carbon plan: delivering our low carbon future', December 2011
- 2 Energy UK: 'Pathways for the GB electricity sector to 2030 February 2016'
- 3 Ofgem: 'Electricity NIC submission: SP energy networks – ANGLE-DC'. Available at <https://www.ofgem.gov.uk/publications-and-updates/electricity-nic-submission-sp-energy-networks-angle-dc>, accessed 4 August 2016
- 4 Yu, J., Smith, K., Urizarbarrena, M., *et al.*: 'Initial designs for ANGLE-DC project: challenges converting existing AC cable and overhead line to DC operation'. CIRED 2017, 2017, Glasgow
- 5 Long, C., Wu, J., Thomas, L., *et al.*: 'Optimal operation of soft open points in medium voltage electrical distribution networks with Distributed Generation', *Appl. Energy*, 2016, **184**, pp. 427–437