

This is an Open Access document downloaded from ORCA, Cardiff University's institutional repository:<https://orca.cardiff.ac.uk/id/eprint/91909/>

This is the author's version of a work that was submitted to / accepted for publication.

Citation for final published version:

Gosling, Jonathan , Pero, Margherita, Schoenwitz, Manuel, Towill, Denis Royston and Cigolini, Roberto 2016. Defining and categorizing modules in building projects: an international perspective. *Journal of Construction Engineering and Management* , 04016062. 10.1061/(ASCE)CO.1943-7862.0001181

Publishers page: [http://dx.doi.org/10.1061/\(ASCE\)CO.1943-7862.00011...](http://dx.doi.org/10.1061/(ASCE)CO.1943-7862.00011...)

Please note:

Changes made as a result of publishing processes such as copy-editing, formatting and page numbers may not be reflected in this version. For the definitive version of this publication, please refer to the published source. You are advised to consult the publisher's version if you wish to cite this paper.

This version is being made available in accordance with publisher policies. See <http://orca.cf.ac.uk/policies.html> for usage policies. Copyright and moral rights for publications made available in ORCA are retained by the copyright holders.



DEFINING AND CATEGORIZING MODULES IN BUILDING PROJECTS: AN INTERNATIONAL PERSPECTIVE

Jonathan Gosling¹, Margherita Pero², Manuel Schoenwitz³, Denis Towill⁴ and Roberto Cigolini⁵

ABSTRACT

Modularization involves breaking up a system into discrete chunks, which communicate with each other through standardized interfaces, rules and specifications. It is a broad concept, with various interpretations and meanings across research disciplines. The complexity and scope of ‘a module’ is not captured sufficiently and clearly in the construction management and engineering literature, and the impact of modularization across project phases has not been fully explored and articulated. Therefore, the main question addressed in this paper relates to the inherent meaning of “what is a module” in the context of different phases of a building project. In addressing this question, this paper empirically investigates the use of modularity in 15 construction projects, situated in Italy, Germany, Brazil and the UK. The findings of this research suggest that a design-based and an operations-based perspective of modularity co-exist, and that there is the need for an integrated view of modularity across the project life cycle phases, and for collaborative working between designers and site operators. To this aim, a unifying definition of ‘a module’ in building projects is proposed, along with a practical guide to help managers organise project activities for effective modularization. The actual cost analysis of the various modularization strategies provide an interesting avenue for future research. The template proposed also requires wider testing with a wider range of modules.

¹ Senior Lecturer in Supply Chain Management. Logistics Systems Dynamics Group, Cardiff University, Aberconway Building, Column Drive, Cardiff, CF10 3EU

² Assistant Professor, Department of Management, Economics and Industrial Engineering, Politecnico di Milano, Piazza L. da Vinci, 3220133, Milano, Italy

³ Director, Redblue Energy Limited, 12 Hatherley Road, Sidcup, Kent, DA14 4DT

⁴ Professor. Logistics Systems Dynamics Group, Cardiff University, Aberconway Building, Column Drive, Cardiff, CF10 3EU

⁵ Professor, Department of Management, Economics and Industrial Engineering, Politecnico di Milano, Piazza L. da Vinci, 3220133, Milano, Italy

INTRODUCTION

The idea of using modular proportions to regulate the design of buildings has a long history (Le Corbusier 1954). Modular designs and approaches are a useful means for managing complexity (Ethiraj and Levinthal 2004), and help rapidly respond to changing customer requirements (Galunic and Eisenhardt 2001). According to Baldwin and Clark (2000), modularity involves breaking up a system into discrete chunks, which communicate with each other through standardised interfaces, rules and specifications. Modularization is a broad concept though, with various interpretations and meanings across research disciplines and market sectors (Cigolini and Castellano 2002). Schaefer (1999) argues that key challenges for a modular system are finding the appropriate number and types of modules, as well as defining their interactions and interfaces. This paper addresses the problem of identifying and categorizing modules in building projects.

Numerous sources have bemoaned the lack of progress in adopting new ways of working and modern methods of construction in the industry (O'Brian 2009; Pan et al. 2007). Typical problems that appear to have persisted include incorrect specification, co-ordinating deliveries and trades onsite, and information flow issues (Gosling et al. 2015), as well as fragmentation and lack of integration across project parties (Briscoe and Dainty 2001). Volatility of workflow, timeliness and late changes to specification also remain key project risks to be managed (Gosling et al. 2013a). Modular and offsite approaches may help in addressing such persistent problems, but attitudinal issues, and the lack of practical guidance are barriers in adopting new methods (Pan et al. 2007; Schoenwitz et al. 2012). Early studies of modularization in the construction sector sought to demonstrate that the savings outweigh any extra design and engineering costs (Glaser et al. 1979; Murtaza et al. 1993), while later studies have taken a more reflective evaluation of strengths and weaknesses (Blismas et al. 2006).

Arriving at a precise definition of a module is a challenging task though, since there has been a proliferation of terms associated with modularity in the literature. These include, amongst others,

offsite, prefabrication, pre-assembly, modern methods of construction, and industrialized buildings. The collective acronym PPMOF – which stands for Prefabrication, Preassembly, Modularization and Off site Fabrication (Khalili and Chua 2013; O'Connor et al. 2014; Pan et al. 2012) – serves as a reminder of the blurring of boundaries between different concepts. Modular buildings have also been linked with lean construction initiatives (Ikuma et al. 2010), and with the growing offsite movement (Pan et al. 2012), as well as the move towards industrial standardization (O'Connor et al. 2015). However, as noted by Doran and Giannakis (2011), there is little consensus or guidelines as to the precise understanding of a module.

Bodies, Institutes and Governments are interested in encouraging faster, more cost effective methods of construction, often encouraging offsite and prefabrication approaches to contribute to this agenda (Bradbury 2012; Institute of Mechanical Engineers 2015; Modular Building Institute 2015). A number of concerns motivate our study. Firstly, the construction management and engineering literature does not capture sufficiently and clearly the complexity and scope of 'a module'. Secondly, the literature does not capture adequately insights from international applications of modularization through the supply chain. Thirdly, aside from Pan et al (2012), the impact of modularization across project phases has not been fully explored and articulated.

This research work intends to address these concerns by identifying and classifying a range of modules from an international spread of projects. In doing so, we provide insights into how construction companies are applying modularity concepts across project phases, and give a more comprehensive account of what is meant by 'a module'. We also reflect on how practitioners may utilize the insights. Our proposition is that, firstly, the definitions of a module should reflect project phases, and secondly, a richer model for understanding modularization can be developed, which takes into account both pre-assembly options and product architecture hierarchy. Modules can be plotted on these dimensions to take a more informed and systems based approach to modularization. Hence,

the main issue addressed is, in the context of different phases of a building project, ‘what is a module’? This question, as we will show, is indeed much more complicated than initially seems the case. In addressing this question, this paper empirically investigates the use of modularity in 15 different construction projects, situated in Italy, Germany, Brazil and the United Kingdom. Breaking down the research question, the following aims are specified:

- to understand perceptions and definitions of modules from different perspectives.
- to identify categories of modules across different projects, analysing how they are used in relation to product architecture and degree of offsite manufacture.
- to develop a framework for practitioners to consider modularity across the project phases.

LITERATURE REVIEW

Modularization in Construction Projects

As previously noted, in the context of the construction industry, there are substantial variations in the definitions used. Table 1 underlines this issue, and shows that definitions refer to different aspects of modularity. It also highlights that definitions of ‘a module’ are sparse within the construction engineering and management literature. There is a difference between a module, and a broader view of modularity (Miller and Elgard 1998). Doran and Giannakis (2011) provide a more extended definition of construction modularity to include a modular approach to design, production and planning. Indeed, modularity can be considered as having a time dimension that changes throughout the phases of a project (Pan et al. 2012). The latter argue that the overall off-site strategy should be integrated across project phases.

Definition	Focus	Author(s)
“one of a set of separate parts or units that can be joined together to make a machine, a piece of furniture, a building, etc.”	Generic definition of modularity	(OALD 2014)
“a module is an essential and self-contained functional unit relative to the product of which it is part. The module has, relative to a system definition, standardized interfaces and interactions that allow composition of products by combination.”	Generic definition of a module	(Miller and Elgard, 1998)
“modular systems are composed of elements, or ‘modules’, that independently perform distinctive functions.”	Generic definition of a modular system	(Pil and Cohen, 2006)
“contains the specifications of a building block and interfaces, as well as considerable functionality compared to the end product”	The properties of a construction module	(Björnfor and Stehn 2004)
“the provision of modular solutions constructed off site using modular principles and delivered, installed and commissioned on-site to a pre-determined modular plan”	Modular principles applied in construction	(Doran and Giannakis 2011)

Table 1: Table of Definitions

Elsewhere, researchers analyse modularity by focusing on the degree of component independence and interface standardization (Voordijk et al. 2006). Modular houses have been characterized as being made up of modular units, built off-site with connections to adjacent units that are completed on site, including the use of standardized interfaces (Hofman et al. 2009).

There are international examples of studies giving empirical insight, which helps shape a new understanding of modularization. Barlow et al. (2003), while analysing the Japanese construction industry, noticed that many companies offer customized buildings coming from pre-assembled modular units, to increase product personalization without incurring in too high costs and lead time. Halman et al. (2008) explore the opportunities and limitations of modular approaches in the Dutch house building industry, concluding that policy changes are also required to support the uptake of modular construction. They further argue of the need to integrate product architecture and supply chain to ensure appropriate alignment. Naim and Barlow (2003) state that standard housing tends to dominate in the UK house building industry, but that innovative approaches could help balance standardization and customization requirements. Further international discussion of modular concepts in buildings are documented in Germany (Schoenwitz et al. 2012) and Sweden (Jonsson and Rudberg 2014). In the US, the main driving forces for such approaches were found to be time compression and

to compensate for the effect of incremental weather conditions (Lu 2009), and there have been studies seeking to promote the productivity of offsite approaches (Eastman and Sacks 2008).

The ‘offsite’ school of thought also has powerful links with modularity (O’Connor et al. 2014). However, the extent to which a component or building system should be produced offsite is a contested issue (Blismas et al. 2006). Perceptions of offsite approaches are also not always positive (Pan et al. 2007; Zhai et al. 2014). The economic factors behind the decision to move activity offsite are complex, and in some cases can be more costly than onsite practices (Polat et al. 2006). Further, various degrees of offsite activity are possible, and these must be linked with various supply chain approaches (Vrijhoef and Koskela 2000). Classifications of offsite and preassembly are pertinent to the debate on the application of modularity in construction projects. Gibb and Isack (2003), for example, identify factory-made components and subassemblies, non-volumetric pre-assembly which do not create usable space, volumetric pre-assembly (fully finished usable space), and modular buildings, which form the structure of the building.

In recent years the role of modularity has received increasing attention in the literature regarding supply chain management (Salvador et al. 2002), where modular approaches have the potential to reduce risk and uncertainty through the supply chain (Gosling et al. 2013a). Some of the few studies on the topic (Doran and Giannakis 2011; Hofman et al. 2009; Voordijk et al. 2006) report that the supply chains of modular housing systems are made up of two kinds of actors: (i) the system architect and integrator, who defines the product architecture and the design rules for the new modular building, and (ii) module suppliers.

Modularization and Product Architecture

Modularity is a strategy for efficiently organizing complex processes and products. In general terms, a modular system is composed by modules that are “loosely coupled” (Mikkola 2006; Schilling 2000) and that can be “mixed and matched” (Schilling 2000) thanks to standardized interfaces (Baldwin and Clark 2000). The concept of modularity has been applied to, among the others, products,

organizations and supply chains (Pero et al. 2010). Products can be either ‘modular’ or ‘integral’ depending on the allocation of functions to modules (Ulrich 1995) and on the nature and number of interfaces (Ishii et al. 1995): in a pure modular architecture each module performs only one function and interfaces are standard. Product modularity allows firms to increase product variety while reducing the adverse impacts on operational performance coming from product proliferation.

Modularity research can be considered over a range of disciplinary levels, including design theory and operations management (Salvador et al. 2002). Moreover modularity has been found to be a significant design variable in helping align design and supply chain processes (Pero et al. 2010). From the design perspective, a commonly discussed root to modularity is through standardized product platforms and definition of modules through the product architecture (Baldwin and Clark 2000; Hofman et al. 2009; Ulrich 1995). This might include the mapping of relationships between design elements, the use of design rules to establish functions and system boundaries, as well as establishing rules for interfaces between elements (Baldwin and Clark 2000). O'Connor et al. (2015) have shown that combining design standardization with modularization can lead to benefits that exceed the additive sum. From the operations management perspective, modularity has largely been considered as a strategy to increase commonality across different product variants within a product family without incurring in operational inefficiencies (Salvador et al. 2002). Schoenwitz et al. (2012) take more hierarchical view of modular product architecture, clustering house elements into categories, components and subcomponents. In their study, they highlight the different levels of choice at these hierarchical levels.

This paper is built on the hierarchical structure highlighted in Schoenwitz et al. (2012). Such formal articulation of product architecture is relatively rare in the construction sector, but it has been shown to be a powerful way of developing modular design principles across industries (Baldwin and Clark 2000; Ethiraj and Levinthal 2004). Schoenwitz et al. (2012) suggest that the hierarchical structure within the context of a house can be composed of subcomponents, components, and building elements. Subcomponents are the lowest level defined in this study: they are likely to be used by other

areas within a building, either at component or element level and they can be fully or partially assembled off site and often require to be integrated with bigger building elements. Beams and pillars are good examples of this category. Components are fully or partially finished building elements that form part of larger structural elements assembled on site. Wall, floor and roof elements are good examples of this category. Building elements are likely to represent large repeatable segments that repeat across a development: they have a structure and can stand alone, and can be the main chunks of which a development project is composed of. Building elements may also create usable space that, in most of the cases, are completely finished in the factory. They are normally connected to a specific function, e.g. entrance or bedroom.

Modularization of Product, Process and Supply Chain

Fine (2000) considers the many different connections between the product, process and the design of the supply chain: product design is divided into activities of architectural choices and detailed design choices whereas process design is divided into the development of processes and manufacturing systems. Supply chain design is defined as the activity concerned with supply chain architecture and logistics/coordination system decisions (see e.g. Cigolini et al. 2014). These different dimensions must work together efficiently and effectively to meet customer needs (Ellram et al. 2007; Fine 2000). The definitions provided in the foregoing section explicitly relate to product architecture concerns, but – according to other studies outlined in the literature review – process considerations are closely linked (e.g. Naim and Barlow 2003, Doran and Giannakis 2011, Pero et al. 2015). Vjoordik et al. (2006) apply Fine’s model in the context of the construction industry: they provide further insight into product, process and supply chain alignment in a construction context. They argue that the latter is important for establishing the conditions for the application of modular networks. This paper is primarily concerned with product (product architecture) and process (offsite or onsite), but the discussion below shows that the three areas are very closely intertwined and the supply chain will often be involved in modularization efforts.

RESEARCH METHODOLOGY

Conceptual Development

Building on the concepts outlined in the foregoing literature review, Figure 1 is proposed to guide the investigation and analysis presented in this paper. It was developed based on the following knowledge grounded in the existing literature. First of all, a module can be utilised at different levels of the product architecture, namely subcomponent, component or element (Hofman et al. 2009; Mikkola 2006; Schoenwitz et al. 2012; Ulrich 1995). Then, modules can be primarily manufactured ‘offsite’ in a controlled environment, but the degree of onsite assembly can vary from a lot of assembly work to very little. In the latter scenario, modules are fitted together using standard interfaces on site (Blismas et al. 2006; Pan et al. 2012; Vrijhoef and Koskela 2000). Finally, modules may be volumetric or ‘flat pack’. In the former scenario, modules are pre-assembled to the extent that so that they form usable space before they are delivered to the construction site (Gibb and Isack 2003).

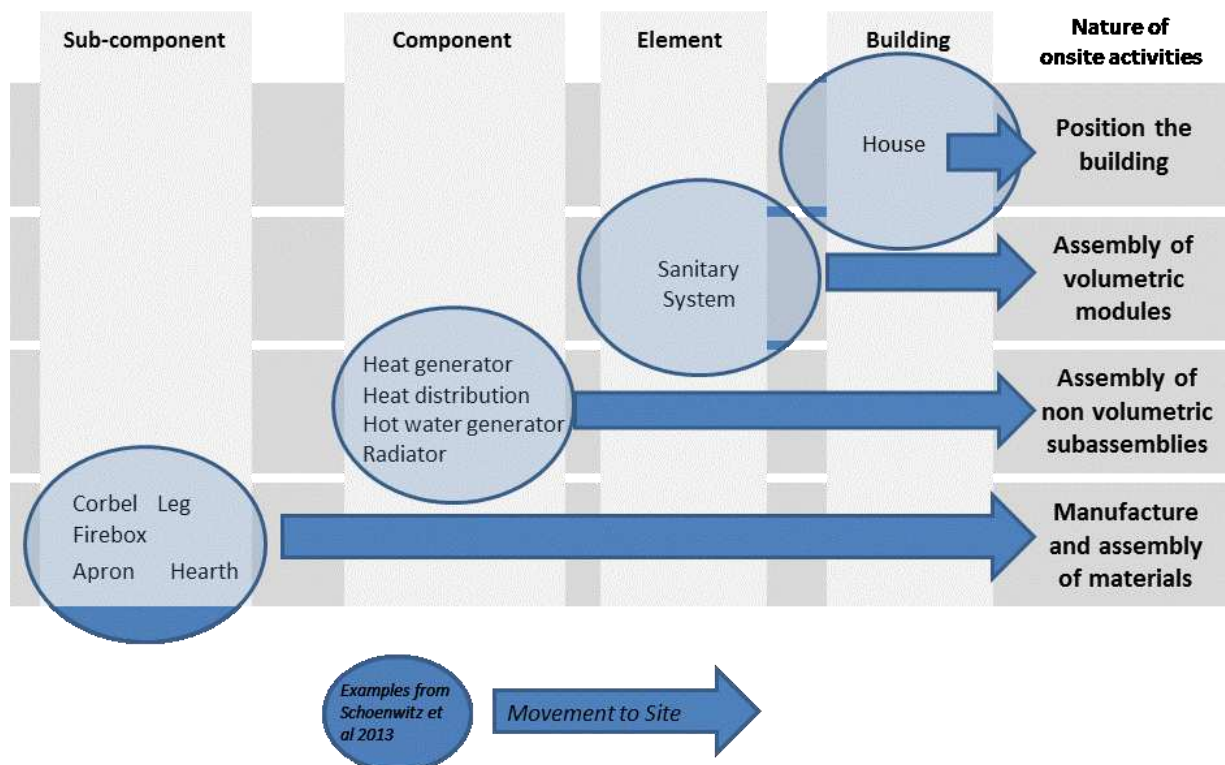


Figure 1: Potential strategies for modularization of a building at different levels

In summary, based on the literature, modularity seems to be utilized at different levels within the product architecture. Each module then can be engineered to tend toward more activities performed,

either offsite or onsite.

By combining Gibb and Isack (2003) with Schoenwitz et al. (2012), four different strategies are proposed for the use of modules to guide the paper and empirical work undertaken. These are illustrated in Figure 1. Gibb and Isack (2003) is a well-established model of the different types of pre-assembly strategies applicable, but it does not take account of the product architecture and hierarchy, which is presented in detail in Schoenwitz et al. (2012). By combining the two, a richer model for understanding modularization can be developed. The strategies in figure 1 are based around the hierarchical levels, so sub-component, component, element or building levels can all be used to employ modules. This product architecture is important to understand the complexity of the product design. Furthermore, it is determined how many components are involved and how these work together.

In Figure 1 the blue arrows highlight the movement to site and the circles give examples for the appropriate strategy. According to the first strategy, the entire building is fully modularised and somehow transported onsite, where it has to be merely positioned. Under the second strategy, a number of volumetric modules is manufactured offsite, while the assembly phase takes place onsite. As an example, Schoenwitz et al. (2012) mention the sanitary system, which essentially is an installation wall with all the necessary sanitary pre-installation. The third strategy differs from the second one in that here modules are represented by non-volumetric units: they are manufactured in a factory and then assembled on site. Examples for this strategy are radiators or heat generators, which are non-volumetric and need to be assembled on site. The fourth and last strategy corresponds to the traditional building approach where bricks and mortar are taken onsite. Examples for this strategy (apart from brick and mortar) include corbels, aprons and legs. The level utilized has implications for the nature of onsite activities undertaken. The empirical work, presented later in the paper, seeks to give further insight into these four different strategies.

Overview of Research Design

Case study research is undertaken in this investigation with the intention of theory building, rather than theory testing. Meredith (1998) argues that a strength of case research is that phenomena can be studied in their natural setting, to develop meaningful, relevant theory, generated from understanding gained through observing actual practice. Flyvberg (2006) notes that formal generalization is overvalued as a source of scientific development, whereas ‘the force of example’ is underestimated. This study is intended to give insight into modularization by the latter approach: a distinction is made between projects and modules as different units of analysis. Companies may be working on many projects at a particular point in time. Projects in turn, may be made up of many modules. The primary focus of this research is on the module, attempting to understand the characteristics and use, but a case is described herein as a project (Yin 2003).

Hence, we adopt a multiple-case study design, where 15 projects are investigated in total. This includes embedded units of analysis, which in this study are the 32 modules identified and analysed. This design helps to achieve depth through case studies, and increased breadth through the embedded units of analysis (Towill et al. 2002). Data was collected through an interview protocol, combining structured and semi structured elements, documentary analysis and site visits. The approach was chosen in order to allow us to probe the complex use of modules in projects, whilst also maintaining consistency across different cases.

Interview protocol and case selection

The interview script (see Table S1 in the Supplemental Data) was split into a number of headings, which included: company overview and modularization, project specific details, modules used on the project, processes and supply chain, project phases, production details and performance. Interviewees with either a general operations oversight, or architects were targeted. These specific areas of expertise were targeted due to the foregoing discussion highlighting that modularity is of particular interest to design theory and operations management (Salvador et al. 2002). Interviewees, therefore, constituted a mixture of managing directors, designers and architects, technical directors and project managers. This allowed for a more rounded view of the interpretation of a module.

Follow up emails and photos of particular modules were often exchanged following each interview. In some cases, early drafts of the diagrams presented in this paper were used to prompt discussion throughout an interview. Data collection also included, where possible, site tours. Four of these were conducted in total. Archival data, such as websites, project descriptions, architectural drawings and project management plans, were also reviewed to get a deeper understanding of each of the projects. To anchor the questions in the interview protocol, interviewees were encouraged to pick a specific project to focus on. An overview of the project details, as well as the analysed modules included in the study, are shown in Table 2, along with the type of interviewee associated with each. In total, the modular approaches in 15 construction projects are investigated.

Table 2: Overview of research methods, projects and module information

Case studies should be selected with a good sense of purpose (Stake 1994). This study sought cases that offer ‘useful variation on dimensions of theoretical interest’ (Seawright and Gerring 2008). Achieving maximum variance across relevant dimensions has stronger claims to representativeness than other case selection methods, since efforts are made to include coverage of a particular categorization. Case studies should also be selected based on both literal replication technique (e.g. projects with the same modular approach to construction), in order to get convergent results, and theoretical replication technique, to explore different practices in terms of modularity (Yin 1984).

In particular, replication technique was used to, firstly, understand perceptions and definitions of modules from different perspectives and project phases, and secondly, to analyse how they are used in relation to product architecture and degree of offsite manufacture.

Based on the guidance from Yin (1984), Stake (1994) and Seawright and Gerring (2008), case study sampling and selection was based on the criteria developed below.

First, relevance, purpose and motivation (Stake 1994): the purpose of this study was to investigate the application of modularization. Hence, projects were targeted with the belief that they would further refine the understanding of modular approaches. Case study companies known interest in

modular techniques, and practicalities such as the willingness of interviewees to participate proactively in a research programme was also considered.

Second, fit with theoretical dimensions (Seawright and Gerring 2008): cases were selected to cover the classification of the strategies for modularization shown in Figure 1, as well as the categories emerging from figure 2, so that projects and modules utilized different strategies. The extent of offsite and onsite was a secondary dimension. Hence, cases repeated across categories of interest.

Third, geographical and market sector scope: to learn across national boundaries, diversity was also pursued in geographical location of the projects and in the business sector. The case studies are situated in Italy, Germany, Brazil and the United Kingdom, helping give a good international spread of projects. Furthermore, to be more specific and focused, this study focused on building projects only, primarily in the residential sector, whilst also commercial buildings are included in the sample. As part of the interview protocol, interviewees were asked to discuss projects they have been involved with, according to suitability and link with modularity. Construct and external validity, and reliability were ensured in the data collection by the use of the study protocol shown in the supplemental data, the use of multiple sources of evidence, and in the research design by the use of replication techniques.

Identifying and Analysing Modules

After specific projects were identified and discussed, interviewees were then encouraged to describe the product architecture and design. Questions probed the level of predefinition, perception of levels within the product architecture, bill of materials, product and material ‘families’, and modules within the project. Once this general information was discussed, interviewees were prompted to describe the project phases, the approach used in designing and assembling, as well as the managerial challenges encountered along the project. Then, the interviewees were asked to focus on the most important modules for the project they had chosen.

Depth of information for a module was emphasized over breadth (i.e. the number of modules). This often triggered a wide-ranging discussion of the definition of ‘a module’. Modules that had been identified were then probed in more detail, including questions related to repeatability and the

percentage of offsite vs. onsite pre-assembly. Information gathered through interviews and secondary sources has been categorized and contextualized (e.g. Miles and Huberman 1984). These steps allowed for cross comparison of projects, module characteristics and strategies, which are presented in the findings.

RESULTS AND ANALYSIS

Modularity across project phases

By combining the generic project phases suggested by Pan et al. (2002) and Kagioglou et al. (2000), and mapping on some direct quotations from the empirical work embedded in this study, different views on modularity emerge also from case studies, as shown in table 3.

Project phase	Planning and design phase	Preconstruction phase	Construction phase	Post-construction phase
Meaning of modularity	<p>“The client can configure the office mixing and matching 12 repeatable module spaces” (Project 1)</p> <p>“There are design-related modules: the size and layout of the apartments (2, 3 or 4 rooms). These are defined during design phase.” (Project 13)</p> <p>“Design starts with a grid made of squares of 150 cm²” (Project 14)</p>	<p>“Modularity allows you to use the modules on various projects geographically distant, just configure interfaces in order to standardize them.” (Project 4)</p> <p>“A design can be broken down into 3 levels: primary, secondary and attributes” (Project 6)</p> <p>“ There are many modules in the building, at different levels.” (Project 8)</p>	<p>“There are modules that are completely pre-casted and then transported into the building, e.g. bathrooms.” (Project 12)</p> <p>“There are modules that are made up of parts that arrive in site and are built, e.g. electric system.” (Project 12)</p>	<p>“Modularity of electrical systems facilitates maintenance” (Project 1)</p> <p>“Modularity provides flexibility in the later life cycle of the building as the layout can be adapted. It also facilitates maintenance.” (Project 14)</p>
Meaning of modularity	Grid layout Product architecture	Hierarchy level	Pre-cast Built on site	Easy maintenance Flexibility in use
Modularity related issue	Standardization	Understanding different building levels	Organizing production off-site and assembly on-site	Ease maintenance and reconfiguration

Table 3: the meaning of modularity across project phases

Table 3 highlights that in the early phases of the project (i.e. during planning and design phase), modularity is perceived as a concept related to the division of space and the repetition of spaces. It is strongly associated to a design supported by a ‘grid’, where elements within the grid repeat. In the preconstruction process (i.e. the second phase of the process), when the engineering of the project takes place, the focus is on the product architecture and hierarchy: it means decomposing and detailing the elements that will compose the grid. When it comes to construction (i.e. the next phase of the process), modularity takes a physical meaning, in that it is associated to offsite and precast, and to how it can reduce the complexity of the work to be done on site. Finally, in the post-construction phase, modularity is perceived to be useful for making easy maintenance, as well as to be leveraged for reconfigure the building.

To add further clarity to table 3, a modular design is distinguished from a traditional design: a modular design typically starts with a ‘grid’ to divide up the space for construction. The designer then employs a systems view within this grid, where consideration is given to the interconnections and repeatability of physical items within this grid. This may result in large standard segments that are repeated across a project. This approach is contrasted with a more traditional view in Table 4. From the empirical work undertaken, 9 of the projects were classified as having a modular design, whereas 6 of the projects were classified as having traditional designs.

Approach	Modular design approach	Traditional design approach
Definition	<ul style="list-style-type: none"> a. Grid layout with repeatable spaces b. Design of the building as a system rather than a collection of parts c. Consideration of interfaces to make easier the assembly and then the reconfiguration of the building d. Consideration of repetition and standardization 	<ul style="list-style-type: none"> a. Limited repetitions of spaces b. Building is seen as a collection of individual parts c. Definition of interfaces are left open d. Limited standardization
Projects from Case research	1, 4, 5, 7, 9, 10, 12, 14, 15	2, 3, 6, 8, 11, 13

Table 4: Comparison of modular and traditional designs

For example, project 7 is a residential development situated in the UK designed to provide high-performance units for a low build cost, using modern methods of offsite manufacture. The development offers 94 new homes arranged in a modern interpretation of classic Victorian terrace. The accommodation ranges from one-bedroom flats to four-bedroom houses, appealing to a variety of users. The scheme was designed from four segments that repeat, allowing for significant use of standard modules and interfaces across these segments.

A further project (see project 14) is a redevelopment and construction of corporate headquarters in Milan (Italy), including two residential towers. The offices are divided into two main buildings over nine floors, and the towers contain 100 apartments. The scheme was designed based on 1.2 m grids, which repeat throughout the building. The designers used the grid to take into particular consideration the installation of pre-assembled elements without the use of traditional external scaffolding, as well as including modular design layouts.

Project 1 is a three-floor office situated in Northern Italy. Architects divided the building, supported by the grid, into spaces, e.g. offices, bathrooms, whose position and internal design were to be detailed and organized with client's (a real estate company) support, respecting the constraints given by the position of the pillars.

Physical utilization of modules

Figure 2. shows the 32 modules classified according to the level of offsite activity (where a high level corresponds to more than 50% done offsite) and the product hierarchy level. By looking closer at Figure 2, the majority of modules (22 out of 32) have a high level of offsite activity. Only one module was identified at the building level in the product hierarchy. Three are at the element level, and the majority are at the component or subcomponent level (respectively 17 and 11 modules). There are no examples of modules with low level of offsite activity at the building and element levels of the product hierarchy.

Product Architecture Level	Building	<div>No Modules from this study</div> <div> <u>Implications for Operations</u> <ul style="list-style-type: none"> • Manufacturing Complexity: complex • Transportation: easy • Site Integration: complex • Handling: easy </div>	<div> Modules: <ul style="list-style-type: none"> • Wooden house module (31) </div> <div> <u>Implications for Operations</u> <ul style="list-style-type: none"> • Manufacturing Complexity: complex • Transportation: complex • Site Integration: easy • Handling: complex </div>
	Element	<div>No Modules from this study</div> <div> <u>Implications for Operations</u> <ul style="list-style-type: none"> • Manufacturing Complexity: complex • Transportation: easy • Site Integration: complex • Handling: easy </div>	<div> Modules: <ul style="list-style-type: none"> • Bathroom (21) • Room pod (25) • Room pod (26) </div> <div> <u>Implications for Operations</u> <ul style="list-style-type: none"> • Manufacturing Complexity: complex • Transportation: complex • Site Integration: easy • Handling: complex </div>
	Component	<div> Modules: <ul style="list-style-type: none"> • Floor (2) • Precast concrete structure (11) • Concrete mix (12) • Precast ceiling (19) • External wall (22) • Roof element (24) </div> <div> <u>Implications for Operations</u> <ul style="list-style-type: none"> • Manufacturing Complexity: easy • Transportation: easy • Site Integration: medium complex • Handling: easy </div>	<div> Modules: <ul style="list-style-type: none"> • Floor (3, 4 and 5) • Electric system (9 and 10) • Fixtures (13 and 14) • Windows (15) • Roofing (18) • Internal/installation wall (23) • Façade system (28) </div> <div> <u>Implications for Operations</u> <ul style="list-style-type: none"> • Manufacturing Complexity: easy • Transportation: easy • Site Integration: easy • Handling: easy </div>
	Sub-component	<div> Modules: <ul style="list-style-type: none"> • Floor element (1 and 8) • Traditional brick (30) • Oak beams (32) </div> <div> <u>Implications for Operations</u> <ul style="list-style-type: none"> • Manufacturing Complexity: easy • Transportation: easy • Site Integration: medium complex • Handling: easy </div>	<div> Modules: <ul style="list-style-type: none"> • Suspended floor element (6 and 7) • Pillars (16) • Beams (17) • Pod panel (20) • Structural beam (29) </div> <div> <u>Implications for Operations</u> <ul style="list-style-type: none"> • Manufacturing Complexity: easy • Transportation: easy • Site Integration: easy • Handling: easy </div>
		Low	High
		% Activities 'off site'	

Figure 2: Matrix for analysing modules

All modules at building and element level are part of modular design systems, while all the other cells of the matrix contain both modular and traditional designs. Furthermore, when comparing the percentage of off-site activities performed for each module, at the lower levels of the product architecture, the importance of offsite activity appears independent from the design approach (i.e. traditional vs. modular). The design approach and level of offsite are reconciled at the high levels of the product architecture, as – at least according to this study – a modular design approach is always associated with high offsite.

However, one of the most surprising results is that the design approach is not aligned to the percentage of offsite: both module 27 and 30 are part of traditional design strategies, but with remarkably different offsite activities. Therefore, there is a misalignment between the design approach and the

percentage of off-site activities. The bigger the module is the higher is the probability that this will result in offsite manufacturing methods being applied.

Modularity at different product architecture levels

Modular designs may be operationalized at the building level, i.e. at the highest level in the product hierarchy. This strategy will likely make use of volumetric methods of construction. For example module 31 (see Table 2 for full information) from project 4 illustrates an example of low-cost houses for people whose houses have been temporary destroyed or temporarily occupied for security reasons after an earthquake. The design exploits a modular wooden structure with volumetric approach to enable the building to be moved if required. The whole building, in this case, is a module and is almost completely built offsite, quickly and on a low cost basis. Transporting the whole building, and accommodating late change are difficult in such approaches though.

Modular designs may also be operationalized at an element level. This strategy is well illustrated by the use of studio pods in project 15. This is a student hall accommodation development in London. The scheme will result in 418 self-contained student accommodation units, plus leisure and retail space spread over three new buildings. A typical studio has an area of 17.4 m² and provides self-contained accommodation offering bathroom, kitchen, study and sleeping areas. The scheme was designed to be constructed via modular bedroom ‘pods’ (module 26 in Table 2). The studio pods will form three separate student accommodation blocks of between four and nine storeys. This affords opportunities for lead-time reduction, and repeated spaces across the scheme. Sequencing, in terms of regular and ordered delivery patterns, as well as transporting large volumetric elements is challenging to manage.

As mentioned above, project 14 is a redevelopment and construction of corporate headquarters in Milan, including two residential towers. This project makes use of modular designs operationalized at the component level. The scheme was designed to take into particular consideration the installation of pre-assembled elements. In particular, module 28 (see table 2) refers to the units composing the outer skin of the office façade, which has been pre-assembled in the factory. Delivery times have

been able to be reduced by using a construction solution that allowed high-speed installation while ensuring a guaranteed high quality of the installed product. A challenge of this strategy is that there is a large upfront investment of resources in the engineering and design process with the risk that it may not be used on a further project. Hence, this is dependent on the scale of the project and the repetitions of the module within the project. Further, interconnections between different modules must be effectively managed.

The final strategy for operationalizing modular designs takes place at subcomponent level. Project 10 is the development of two buildings for industrial use and one tower for offices. The project was designed using a modular approach, but no volumetric elements were shipped on site to build it. Suppliers provided the main pre casted components and subcomponents to be assembled onsite to form the building structure and, among them, the pod to cover the rooms of the building for industrial use (module 20 in table 2). The pods were fixed on the structure with easy-to-remove interfaces (e.g. bolts).

Traditional designs at different product architecture levels

From this study, no modules using traditional designs were identified at building or element levels. The first strategy for traditional designs, therefore, is to operationalize them at component level. Project 13 refers to the building of a building for residential use in Sardinia (Italy). It has seven floors, plus two levels underground for garages and cellars. The design and the construction of the building followed traditional approach. Clients could customize each apartment deciding, for instance the position of walls, the kind of floors, and sanitary. Floors were built using pre casted elements brought on-site during the building process (module 3 in table 2).

Traditional designs may also be operationalized at subcomponent level. Project 2 is a development of two residential buildings in the countryside of Brazil, built in structural masonry. It consists of 96 apartments, divided in two towers of fourteen floors each. Project 3 is also located in Brazil, and is a development of two residential buildings in Sao Paulo. The project develops in total 498 units over 6,400 m². The primary construction method is reinforced concrete frame. The project started in May

2013 and is still ongoing at the time of writing. Module 27 refers to a pre-cast concrete block that is produced by external suppliers to be used for assembly on site.

Strengths and weaknesses of modules at different product architecture levels

Figure 2 also indicates some competitive trade-offs and patterns across the matrix. Towards the top of the matrix, at element and building levels with high levels of offsite manufacture, transport and handling become a major issue. According to one of the interviewees from project 1: “the transport is a critical matter: truck renting is expensive and regulations are strict”, while responding to late changes is very difficult since “there is no possibility to change later in the project”. Besides, it is also likely that “the customer is only involved early in the project to define some of the details”, as stated by a manager of project 12, who also believes that the benefits of offsite manufacture can be realised, given that “the benefits of using pre-casted element is a reduction of lead time”.

Towards the bottom of the matrix, a different strength and weakness profile is evident. Extensive use of subcomponents can markedly increase the complexity of site management, meaning that “managing a large set of suppliers is a challenging issue for us”, as stated by a team member of project 2. This can sometimes result in the need for external help and analysis, as happened in project 3 where “there is a high need of coordinating the work in the yard, so we hired a consultant to help us”. Even at the component level, managing interconnections between components can be an issue. For example, project 8 required “periodic meetings between the suppliers and the general contractor” that were “held every week to coordinate the work in the yard and assure maximum safety”. Using component and subcomponent-based strategies does offer potential flexibility and adaptability to late client changes on site, if required.

Such quotes illustrate some of the trade-offs in relation to strengths and weaknesses of different positions, echoing themes within the literature. For instance, Cigolini and Castellano (2002) find that modularization improves safety and quality at the expenses of a more complex handling and logistics. Cost considerations and time saving estimates remain the main key factors for evaluating the overall effectiveness of modular methods.

PRACTICAL GUIDE FOR IMPLEMENTATION

Figure 3 brings together different elements of the paper to develop a practical guide for practitioners to follow. It is organised using general project phases, and the following recommendations are developed for practitioners, which link to different parts of this paper.

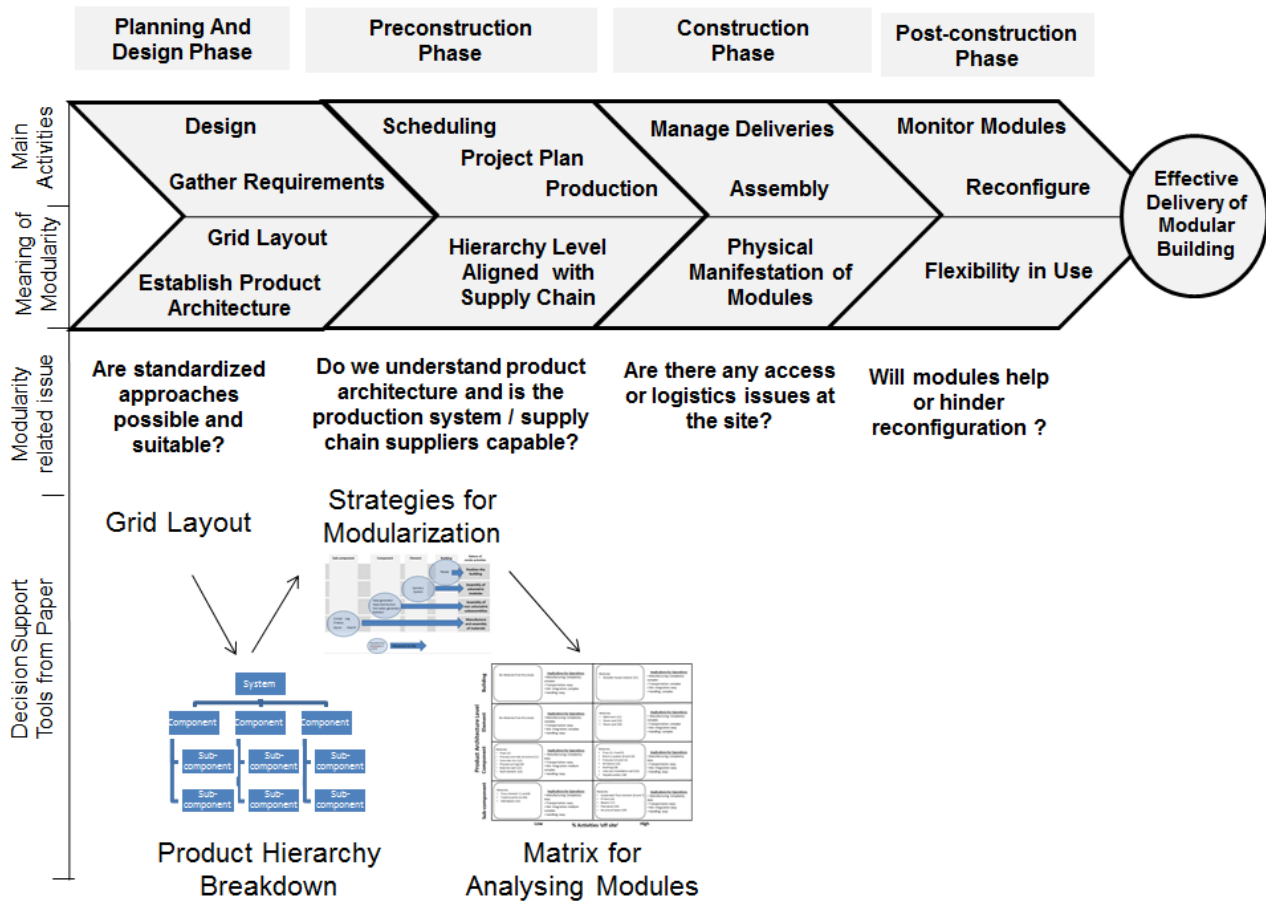


Figure 3: Modularity and different phases in project life cycle

First, use a grid layout to support planning and design phase. This supports repeatability and standardization in the design stage and later in the project phases.

Second, develop a formalised product architecture to support design choices. This advice builds on general design guidelines by Ulrich (1995), but also extends the product hierarchy of a building system proposed by Schoenwitz et al. (2012).

Third, link the product architecture to the 4 strategies (reported in Figure 1) in the preconstruction phase to establish the level at which they will be used. This helps establish a physical delivery strategy for the modules.

Fourth, operationalise the strategy through the planning matrix (see figure 2) in the preconstruction stage, where the costs and benefits of different approaches can be considered and analysed.

The above recommendations also require the evaluation of inputs, drivers and constraints. This helps in the formulation of an appropriate strategy for the project. In the figure, these are depicted as required inputs, and constrain considerations. Figure 3 also highlights the need to think across project phases, including the integration of design, purchasing and site operations. The analysis of perceptions of modularity at the different levels lends support to the distinction between design theory view and an operations management view of modularity, and the importance of uniting these different perspectives. This also supports the findings of Pan et al. (2012), highlighting the need for collaborative working between designers and site/operations early in the project life cycle, along with feedback from manufacturers to give insight into offsite possibilities, as offering the best opportunity for the benefits of modularization to be realized. Finally, a systems thinking mind-set is encouraged, based on the principles outlined in Gosling et al. (2013b) in the approach to modular construction, since it is important to consider the whole, and the role of modules and actors within it.

CONCLUSIONS

This paper has considered the question of ‘what is a module’ in the context of different phases of a building project. The main aims of this paper were to understand perceptions and definitions of modules from different perspectives, identify categories of modules across different projects, and analyse how they are used in relation to product architecture and degree of offsite manufacture. The final aim was to develop a framework for practitioners to consider modularity across the project phases. In addressing these aims, the paper gives insight into the nature of modularity in housebuilding projects, showing at the same time the complexity and the opportunities for applying it in the construction industry.,

The first aim was to understand perceptions and definitions of modules from different perspectives. A design-based and an operations-based perspective of modularity has been identified. Integrating these perspectives offers the best opportunity for exploiting the benefits of modularization. Indeed, design can help set a 'path' to modular construction by encouraging the use of repeatable spaces and a system-wide view of the ways elements and components are intertwined, thus allowing to leverage modularization with e.g. off-site production and reconfiguration, in the post-construction phase.

Next, the aims were to identify categories of modules across different projects and analyse how they are used in relation to product architecture and degree of offsite manufacture. Based on evidence from 15 projects, situated in Italy, Germany, Brazil and the United Kingdom and 32 'practitioner defined' identified across the projects. Using the design approach and the level at which modules are operationalized, eight strategies to use modules can be theoretically envisaged: six of them are also supported by evidence collected over the fieldwork on case studies. Multiple strategies are likely to be employed across a specific project, as some portions of a building are designed and operationalized at element level, whereas other portions are operationalized at subcomponent level.

Addressing the final aim, the paper also developed a guide, with insight from practice, to help organise project activities for effective modularization. The guide, for each project step, proposes the main activities to perform in each project phase, along with required inputs and key question to address. Thus, it can be used as decision support system for both architects and site managers to jointly consider modularization strategies. Finally, specific support tools are proposed for each project phase. These tools refer to a structured four-step approach (see Figure 3) to be followed to consider both modular design and off-site strategy. (i) Use a grid to support both planning and design phase. (ii) Formalize product architecture. (iii) Define the level of off-site for each element in the product

architecture. (iv) Consider implications for operations (Figure 2) of each decision, by trading-off costs and benefits.

At the beginning of the paper we posed the question, in the context of different phases of a building project, ‘what is a module’? This paper captures the meanings, perceptions and definitions of modules across a project lifecycle, and eventually proposes the following unifying definition of ‘a module’ in building projects, which we articulate as *‘A module is physically manifested as a construction unit that is part of a wider system, which can be integrated through pre-planned interfaces. These physical modules are the result of, and can facilitate, modularization in different phases of the project. They may be considered at different hierarchical levels within the overall product architecture, may be manufactured on or offsite, and can be volumetric or non-volumetric’*. This definition helps enlarge the debate about, and the practitioners’ perception of modularity to include both design and operations perspectives, with a system-thinking approach.

The overall contribution of this article has been to help arrive at a more comprehensive definition of a module through the project phases, drawing on insight from a range of international building projects. The guiding frameworks developed help to organize our thinking in relation to potential modularization strategies. The case study elements of the paper are based on building project, largely in the residential and commercial sector. Projects were selected based on the closeness of fit with the study, and modules were self-selected by interviewees. Care should, therefore, be taken in generalizing the findings, and the scope is limited to building projects. While these generalizability issues do exist, we consider that the models, definitions and categories developed can be used and adapted by practitioners to articulate their modularization strategies, and researchers may build on them via wider scale testing. The actual cost analysis for each strategy, and the combinations, provide an interesting avenue for future research. The template proposed also requires greater testing with a wider range of modules, across different projects and sectors.

ACKNOWLEDGEMENTS

The authors wish to acknowledge the five anonymous referees and the Editor of the Journal of Construction Engineering and Management for having provided many helpful suggestions that considerably improved the manuscript. We are also grateful to the many practitioners and companies that made time to support this research. Finally, we would like to dedicate this paper to the life of Professor Denis Towill, our co-author and friend, who sadly passed away while the paper was under review. It was a privilege to have known and worked with him (one last sign off TTFN DRT).

SUPPLEMENTAL DATA

Table S1 is available online in the ASCE Library (ascelibrary.org).

REFERENCES

- Baldwin, C. Y., and Clark, K. B. (2000). *Design Rules: The power of modularity* MIT Press, Cambridge, MA.
- Barlow, J., Childerhouse, P., Gann, D., Hong-Minh, S. v., Naim, M., and Ozaki, R. (2003). "Choice and delivery in housebuilding: lessons from Japan for UK housebuilders." *Building Research & Information*, 31(2), 134-145.
- Blismas, N., Pasquire, C., and Gibb, A. (2006). "Benefit evaluation for off-site production in construction." *Construction Management and Economics*, 24(2), 121-130.
- Bradbury, D. (2012). "Thinking outside the box." *Financial Times*.
- Briscoe, G., and Dainty, A. (2005). "Construction supply chain integration: an elusive goal?" *Supply Chain Management*, 10(3/4), 319-326.
- Cigolini, R., and Castellano, A. (2002). "Using modularization to manage construction of onshore process plants: a theoretical approach and case study." *Project Management Journal*, 33(2), 29-40.
- Doran, D., and Giannakis, M. (2011). "An examination of a modular supply chain: a construction sector perspective." *Supply Chain Management: An International Journal*, 16(4), 260-270.
- Dzeng, R.-J., Wang, W., and Tserng, H. (2004). "Module-based construction schedule administration for public infrastructure agencies." *Journal of construction engineering and management*, 130(1), 5-14.
- Eastman, C., and Sacks, R. (2008). "Relative Productivity in the AEC Industries in the United States for On-Site and Off-Site Activities." *Journal of Construction Engineering and Management*, 134(7), 517-526.
- Ellram, L. M., Tate, W. L., and Carter, C. R. (2007). "Product-process-supply chain: an integrative approach to three-dimensional concurrent engineering." *International Journal of Physical Distribution & Logistics Management*, 37(4), 305-330.
- Ethiraj, S. K., and Levinthal, D. (2004). "Modularity and Innovation in Complex Systems." *Management Science*, 50(2), 159-173.
- Fine, C. H. (2000). "Clockspeed-based strategies for supply chain design." *Production and Operations Management*, 9(3), 213-221.
- Galunic, D. C., and Eisenhardt, K. M. (2001). "Architectural innovation and modular corporate forms." *Academy of Management Journal*, 44(6), 1229-1250.

- Gibb, A. G. F., and Isack, F. (2003). "Re-engineering through pre-assembly: client expectations and drivers." *Building Research & Information*, 31(1), 146-160.
- Glaser, L., Kramer, J., and Causey, E. (1979). "Modular plant concepts-practical aspects of modular and barge-mounted plants." *Chemical Engineering Progress*, 75(10), 49-55.
- Gosling, J., Naim, M., and Towill, D. (2013a). "Identifying and Categorizing the Sources of Uncertainty in Construction Supply Chains." *Journal of Construction Engineering and Management*, 139(1), 102-110.
- Gosling, J., Sassi, P., Naim, M., and Lark, R. (2013b). "Adaptable buildings: A systems approach." *Sustainable Cities and Society*, 7, 44-51.
- Gosling, J., Towill, D. R., Naim, M. M., and Dainty, A. R. (2015). "Principles for the design and operation of engineer-to-order supply chains in the construction sector." *Production Planning & Control*, 26(3), 203-218.
- Halman, J. I., Voordijk, J. T., and Reymen, I. M. (2008). "Modular approaches in Dutch house building: an exploratory survey." *Housing Studies*, 23(5), 781-799.
- Hofman, E., Voordijk, H., and Halman, J. (2009). "Matching supply networks to a modular product architecture in the house-building industry." *Building Research and Information*, 37(1), 31-42.
- Ikuma, L. H., Nahmens, I., and James, J. (2010). "Use of safety and lean integrated kaizen to improve performance in modular homebuilding." *Journal of construction engineering and management*, 137(7), 551-560.
- Institute of Mechanical Engineers (2015). "UK House Building: Manufacturing Affordable Quality Homes."
- Ishii, K., Juengel, C., and Eubanks, C. F. (1995). "Design for product variety: key to product line structuring." *7th International Conference on Design Theory and Methodology* Boston, MA.
- Jonsson, H., and Rudberg, M. (2014). "Classification of production systems for industrialized building: a production strategy perspective." *Construction Management and Economics*, 32(1-2), 53-69.
- Kagioglou, M., Cooper, R., Aouad, G., and Sexton, M. (2000). "Rethinking construction: the Generic Design and Construction Process Protocol." *Engineering Construction & Architectural Management* 7(2), 141-154.
- Khalili, A., and Chua, D. (2013). "Integrated prefabrication configuration and component grouping for resource optimization of precast production." *Journal of Construction Engineering and Management*, 140(2), 04013052.
- Le Corbusier (1954). *The modulator: a harmonious measure to the human scale universally applicable to architecture and mechanics*, Faber and Faber.
- Lu, N. (2009). "The Current Use of Offsite Construction Techniques in the United States Construction Industry." *Construction Research Congress 2009*, 946-955.
- Meredith, J. (1998). "Building operations management theory through case and field research." *Journal of Operations Management*, 16, 441-454.
- Mikkola, J. H. (2006). "Capturing the degree of modularity embedded in product architectures." *Journal of Product Innovation Management*, 23(2), 128-146.
- Miller, T. D., and Elgard, P. "Defining modules, modularity and modularization." *Proc., Proceedings of the 13th IPS Research Seminar, Fuglsoe*.
- Modular Building Institute (2015). <<http://www.modular.org/>>. (Accessed: 10/11/2015).
- Murtaza, M. B., Fisher, D. J., and Skibniewski, M. J. (1993). "Knowledge-based approach to modular construction decision support." *Journal of Construction Engineering and Management*, 119(1), 115-130.
- Naim, M., and Barlow, J. (2003). "An innovative supply chain strategy for customized housing." *Construction Management & Economics*, 21(6), 593-602.
- O'Brian, W. J., Formosa, C. T., Vrijhoef, R., and London, K. A. (2009). "Construction Supply Chain Management Handbook", CRC Press.
- O'Connor, J. T., O'Brien, W. J., and Choi, J. O. (2014). "Critical Success Factors and Enablers for Optimum and Maximum Industrial Modularization." *Journal of Construction Engineering and Management*, 140(6).
- O'Connor, J. T., O'Brien, W. J., and Choi, J. O. (2015). "Standardization Strategy for Modular Industrial Plants." *Journal of Construction Engineering and Management*, 04015026.
- Pan, W., Gibb, A. G., and Dainty, A. R. (2007). "Perspectives of UK housebuilders on the use of offsite modern methods of construction." *Construction Management and Economics*, 25(2), 183-194.

- Pan, W., Gibb, A. G., and Dainty, A. R. (2012). "Strategies for Integrating the Use of Off-Site Production Technologies in House Building." *Journal of Construction Engineering and Management*, 138(11), 1331-1340.
- Pero, M., Abdelkafi, N., Sianesi, A., and Blecker, T. (2010). "A framework for the alignment of new product development and supply chains." *Supply Chain Management: An International Journal*, 15(2), 115-128.
- Polat, G., Arditi, D., Ballard, G., and Mungen, U. (2006). "Economics of on-site vs. off-site fabrication of rebar." *Construction Management and Economics*, 24(11), 1185-1198.
- Salvador, F., Forza, C., and Rungtusanatham, M. (2002). "Modularity, product variety, production volume, and component sourcing: theorizing beyond generic prescriptions." *Journal of Operations Management*, 20, 549-575.
- Schaefer, S. (1999). "Product design partitions with complementary components." *Journal of Economic Behavior and Organization*, 38(3), 311-330.
- Schilling, M. A. (2000). "Towards a general modular systems theory and its application to inter-firm modularity." *Academy of Management Review*, 25(2), 312-334.
- Schoenwitz, M., Naim, M., and Potter, A. (2012). "The nature of choice in mass customized house building." *Construction Management and Economics*, 30(3), 203-219.
- Seawright, J., and Gerring, J. (2008). "Case selection techniques in case study research a menu of qualitative and quantitative options." *Political Research Quarterly*, 61(2), 294-308.
- Shaked, O., and Warszawski, A. (1992). "CONSCHE: expert system for scheduling of modular construction projects." *Journal of construction engineering and management*, 118(3), 488-506.
- Stake, R. (1994). *The Art of Case Study Research*, Sage Publications.
- Towill, D. R., Childerhouse, P., and Disney, S. M. (2002). "Integrating the automotive supply chain: Where are we now?" *International Journal of Physical Distribution & Logistics Management*, 32(1/2), 79-95.
- Ulrich, K. (1995). "The role of product architecture in the manufacturing firm." *Research Policy*, 24(3), 419-440.
- Voordijk, H., Meijboom, B., and Haan, J. d. (2006). "Modularity in supply chains: a multiple case study in the construction industry." *International Journal of Operations & Production Management*, 26(6), 600-618.
- Vrijhoef, R., and Koskela, L. (2000). "The four roles of supply chain management in construction." *European Journal of Purchasing & Supply Management*, 6(3-4), 169-178.
- Yin, R. K. (2003). *Case study research: design and methods*, Sage publications, London.
- Zhai, X., Reed, R., and Mills, A. (2014). "Factors impeding the offsite production of housing construction in China: an investigation of current practice." *Construction Management and Economics*, 32(1-2), 40-52.