

This is an Open Access document downloaded from ORCA, Cardiff University's institutional repository: <https://orca.cardiff.ac.uk/id/eprint/131012/>

This is the author's version of a work that was submitted to / accepted for publication.

Citation for final published version:

Muaaz-Us-Salam, Syed, Cleall, Peter John and Harbottle, Michael John 2020. Application of enzymatic and bacterial biodelignification systems for enhanced breakdown of model lignocellulosic wastes. *Science of the Total Environment* 728 , 138741. 10.1016/j.scitotenv.2020.138741

Publishers page: <http://dx.doi.org/10.1016/j.scitotenv.2020.138741>

Please note:

Changes made as a result of publishing processes such as copy-editing, formatting and page numbers may not be reflected in this version. For the definitive version of this publication, please refer to the published source. You are advised to consult the publisher's version if you wish to cite this paper.

This version is being made available in accordance with publisher policies. See <http://orca.cf.ac.uk/policies.html> for usage policies. Copyright and moral rights for publications made available in ORCA are retained by the copyright holders.



Application of Enzymatic and Bacterial Biodelignification Systems for Enhanced Breakdown of Model Lignocellulosic Wastes

AUTHOR NAMES

Syed Muaaz-Us-Salam^{d}, Peter John Cleall^d, Michael John Harbottle^d*

^dSchool of Engineering, Cardiff University, Cardiff, CF24 3AA, U.K.

Corresponding Author*. Email: muaaz-us-salams@cardiff.ac.uk.

ABSTRACT

This paper explores the extent to which enzymatic and bacterial biodelignification systems can breakdown lignocellulose in model wastes to potentially enhance biogas generation. Two representative lignocellulosic wastes (newspaper and softwood) commonly found largely undegraded in old landfills were used. A fungal peroxidase (lignin peroxidase) enzyme and a recently isolated lignin-degrading bacterial strain (*Agrobacterium sp.*) were used. Tests were conducted in stirred bioreactors with methanogens from sewage sludge added to produce biogas from breakdown products. Addition of lignin peroxidase resulted in ~20% enhancement in cumulative methane produced in newspaper reactors. It had a negative effect on wood. *Agrobacterium sp.* strain enhanced biodegradation of both wood (~20% higher release of soluble organic carbon and enhanced breakdown) and newspaper (~2-fold biogas yield). The findings of this paper have important implications for enhanced breakdown in old landfills that are rich in these wastes, and anaerobic operations utilising lignocellulosic wastes for higher degradation efficiencies and biogas production.

KEYWORDS: Lignocellulose, peroxidase enzyme, bacterial biodelignification

1 INTRODUCTION

The rate of landfill biogas production is initially high as the easily degradable fraction is broken down, the rate then decreases with a subsequent long ‘tail’ of emissions typically observed. This happens due to the accumulation of waste fractions that are difficult for landfill microbiota to break down, i.e. lignocellulose-containing wastes (Barlaz et al., 1989). Moreover, these slow rates of gas generation after the easily-degradable matter has depleted are insufficient for energy generation or flaring, and so the biogas typically escapes into the atmosphere. As landfill biogas mainly comprises of methane and carbon dioxide, which are two major contributors to climate change (O'Dwyer et al., 2017), this is not a sustainable situation.

The recalcitrance of lignocellulosic wastes results from the presence of lignin, which is a complex heteropolymer and the second most abundant biopolymer in nature. Due to its very complex structure, including ether and C-C double bonds, phenolic monomers etc, most microorganisms found in landfills find it extremely difficult to breakdown this polymer (Bugg et al., 2011a; Cragg et al., 2015). Lignin also forms a ‘glue’-like structure around other easily degradable matter (e.g. cellulose, hemicellulose) in lignocellulosic wastes to, in effect, protect against microbial attack, hence further decreasing the bioavailability of the biomass (Brandt et al., 2013).

Accelerating breakdown of lignin and subsequent methanogenesis in the waste body would help to confine methane emissions to a shorter period of higher methane concentration in biogas, allowing more of the landfill gas to be used for energy generation/stopping escape into the atmosphere and reducing the long ‘tail’ of low emissions. This would also allow more rapid stabilization of sites and so reduce long-term

management costs for operators. Lignocellulosic wastes are also diverted to anaerobic digestion (AD) plants for production of biogas (Wyman et al., 2017). However, the same problem of recalcitrance of these wastes to biodegradation makes it difficult to utilise their full potential in AD operations (Hassan et al., 2018). Again, accelerating the breakdown of lignocellulose could also offer better biogas recovery resulting in improved biogas yields from lignocellulosic waste.

This acceleration may be achieved by biotechnological methods. For instance, some microorganisms have evolved specifically to degrade lignin, with white-rot fungi being one of the few well-studied organisms (Bugg et al., 2011a). White-rot fungi produce extracellular peroxidase enzymes to break down lignin. However, the process is extremely slow due to slow fungal growth over the biomass (Bugg et al., 2011a; Bugg et al., 2011b; Cragg et al., 2015) and is limited in typical waste environments such as landfill due, for example, to a lack of oxygen (Geoffrey, 2003; Leonowicz et al., 1999). Some bacteria are also able to metabolise lignocellulose (Mathews et al., 2015; Rahmanpour et al., 2016; Xu et al., 2018) and have been shown to be more flexible in terms of the conditions under which they can operate (Bugg et al., 2011a; Bugg et al., 2011b; Cragg et al., 2015; Rashid et al., 2017).

Acceleration of breakdown of lignin-rich materials will require more rapid enzymatic activity, which can be addressed in two ways: (i) extracellular enzymes similar to those produced by white-rot fungi, which are available commercially, can be added to the system thereby eliminating the need to use the organism itself in biodelignification (Hettiaratchi et al., 2014; Hettiaratchi et al., 2015; Jayasinghe et al., 2011; Jayasinghe et al., 2014; Jayasinghe et al., 2013). Researchers have applied this technique of enzymatic

biodelignification with the prospect of enhanced recovery of chemicals/biogas with varying degrees of success (Schroyen et al., 2017; Schroyen et al., 2014; Schroyen et al., 2015) although not too realistic, complex waste materials such as wood or newspaper. (ii) a second approach is the application of bacteria for delignification, this has received only very limited attention but is gaining popularity and shows promise in enhancing the breakdown of lignocellulosic wastes for various biotechnological applications (e.g. biogas generation, bioethanol production, renewable chemicals) (Bugg et al., 2011a; Bugg et al., 2011b; Mathews et al., 2015; Rashid et al., 2017). However, the application of this technique to complex waste materials likely to be found in significant quantities in landfills is yet to attract significant attention.

Many of the aforementioned studies have been carried out under highly-controlled conditions (e.g. highly buffered systems) and with idealised materials (e.g. model lignin molecules, dissolved pure kraft lignin). The question of how well these enzymes and bacteria can breakdown lignocellulose in realistic waste materials found typically undegraded in landfills, with the goal of enhancing gas production and hence stabilising the waste mass is considered in this study.

The objective of this paper is to test the hypothesis that certain enzymes and bacteria can break down lignocellulose in complex and realistic waste materials, found to be largely undegraded in landfills (Ximenes et al., 2015; Ximenes et al., 2017; Ximenes et al., 2008), and so enhance rates of biogas production. Conversion of breakdown products to biogas through methanogenic activity (provided through addition of methanogen-rich sewage sludge) is recorded as volume of gas produced, alongside key parameters of the system (chemical oxygen demand, organic carbon, pH etc.). As part of the bacterial

biodelignification experiments, the hypothesis that the solid:liquid ratio might also play an important role in the ability of the *Agrobacterium sp.* strain to enhance lignocellulosic breakdown and subsequent methanogenesis is also tested.

2 MATERIALS & METHODS

Two waste materials are considered: newspaper (52 g/m² standard recycled paper) and softwood (kiln-dried Nordic redwood pine timber, high heartwood proportion). For particle-size reduction, prior to starting an experiment, approx. 200g of waste were fed to a Fritsch 55743 rotary knife mill (approx. feed size: 2 cm long squares for newspaper and cubes for wood) with a 2mm screen. For experiments requiring powdered wood, the knife-milled material that passed through the 2mm screen was collected and passed through a 0.15 mm sieve. These wastes were chosen to represent the range of lignocellulosic wastes found in MSW landfills, with newspaper containing a smaller amount of lignin in comparison to softwood which is very lignin-rich.

Sewage sludge from an anaerobic digester at a wastewater facility in Cardiff, was used as a source of methanogens (5.52% ± 0.002 dry solids of which 59.46% ± 0.023 volatile solids) in order to model the presence of methanogens in the landfill environment. Sewage sludge was used due to its reported relatively more homogeneous behaviour as an inoculum across the literature for anaerobic biodegradation in comparison to landfill leachate, which varies much more widely around the world (Pearse et al., 2018). The sludge was sampled from the digester in three 5-litre high-density polyethylene jerrycans, immediately transferred to the lab and used to start the bioreactor experiments. For experiments where the bacteria was acclimatisation at 30°C for three days prior to starting an experiment, the jerrycans were immediately taken to the lab from the site, transferred to an incubator

maintained at 30°C and shaken manually twice a day to ensure homogenisation. For every experimental run, fresh sludge was sampled from the same site and sampling point.

Commercially available lignin peroxidase (Merck product code: 42603-10MG-F) was used in the enzyme delignification experiments. *Agrobacterium sp.* (GenBank accession JX872342, bacterial phylum α -*Proteobacteria*), supplied by T. Bugg (Warwick University, UK), which is a facultative anaerobic lignin degrader isolated from landfill soil that grows optimally at 30 °C (Rashid et al., 2017) was used in the bacterial biodelignification experiments.

2.1 Bacterial Culture

The *Agrobacterium sp.* cultures were maintained on Luria-Bertani (LB) agar. The bacterium was cultured in LB broth at 30 °C and the cultures were harvested (centrifugation for 10 min at 3394 rcf – relative centrifugal force) in the exponential phase according to its growth curve. The cultures were then washed with M9 mineral media (6.78g/l Na₂HPO₄, 3 g/l KH₂PO₄, 1 g/l NH₄CL, 0.5 g/l NaCL) to remove any carbon from the LB broth, followed by centrifugation again and resuspension in M9 before addition to the bioreactors.

2.2 Experimental Design

Preliminary Small-scale Bacterial Biodelignification: To identify optimal conditions for later bioreactor experiments on wood a series of preliminary experiments were undertaken. This is particularly critical for wood due to the typically lengthy degradation time-scales (experiments lasting years in some studies) (Wang et al., 2013) and the lignin content of wood and its various sizes found undegraded in landfills (small cm-scale chips to m-scale blocks) (De la Cruz et al., 2013; Wang & Barlaz, 2016; Ximenes et al., 2017; Ximenes et al., 2018). Since wood contains roughly 1.5 times more lignin than newspaper and is

unprocessed lignocellulose, where the structure is intact, it represents some of the most difficult to degrade wastes in landfills and should prove to be a more challenging substrate for biodegradation. To get an understanding of the impact of the physical state of the wood on biodegradation by *Agrobacterium sp.*, small-scale tests in 50 ml sterile tubes were conducted.

Four wood sample types were tested in these experiments exploring the impact of waste form/size and accessibility of biodegradable materials. Each consisted of one particle size range (<2 mm or <0.15 mm) and was either tested as-is or autoclaved prior to the experiment. In the latter case wood was autoclaved at 120°C for 15 mins to test its effect on deconstructing the lignocellulosic matrix for easier microbial access to key polymers, i.e. lignin, cellulose and hemicellulose (Pecorini et al., 2016). Each type was then tested with and without *Agrobacterium sp.* in duplicate specimens. Each specimen comprised 1 g of wood added to 20 ml of M9 mineral medium in 50 ml tubes with either 1 ml of *Agrobacterium sp.* starter culture or 1 ml sterile M9 medium (control) (Rashid et al., 2017).

Flasks were placed in a shaking incubator at 200 rpm and 30°C for seven days. For these small-scale tests, sludge was absent since the purpose was to test the ability of this strain to breakdown lignocellulose, whilst the presence of other microbial communities from the sludge could interfere with the monitoring of the activity of only this strain. Total carbon released into the liquid phase during the test and the organic carbon content of the solid residue after bacterial treatment were analysed. Biogas production, pH and chemical oxygen demand were not monitored in these preliminary small-scale tests.

Bioreactor System: The experimental apparatus (supplied by Anaero Technology UK) consisted of 15 one-litre reactors submerged in a water bath maintained at the required

temperature. Gas flow meters based on the water displacement method (Wickham et al., 2016) combined with an Arduino (for data logging) were used to monitor biogas production. Biogas was collected in 5 litre Tedlar® bags attached to the outlets of the gas flow meter for each reactor, and all biogas data are reported at STP. The reactors were continuously stirred at 45 rpm during the experimental work and the duration of the experiments was between 30-35 days.

Bioreactor-scale Bacterial Biodelignification (Experiment 1): Mechanistic insights from the preliminary small-scale tests were used to inform the design of larger-scale 1 L (total volume) tests. The rationale behind larger-scale experiments was to be able to study whether enhanced biodegradation could be carried out using the *Agrobacterium sp.* whilst monitoring for key variables such as biogas production, release of organic carbon etc, all of this done in the presence of methanogenic microbial communities from sewage sludge. These bacterial experiments contained 4g of waste, and employed a mixture of sludge and M9 minimal media (for the *agrobacterium sp.* (Rashid et al., 2017)).

Each bioreactor comprised 600 ml M9 medium (650 ml in controls), 50 ml suspension of *Agrobacterium sp.* (0 ml in controls), 50 ml methanogen-rich sewage sludge (acclimatised at 30 °C for three days prior to introduction) and 4g of lignocellulosic material (wood or newspaper), together with 300 ml of headspace. The headspace comprised of air due to *Agrobacterium sp.* being a facultative anaerobe, i.e. able to work under anaerobic conditions but preferring aerobic conditions (Rashid et al., 2017; Taylor et al., 2012). This reflects typical conditions in bioreactor landfills, where the waste mass is initially aerobic and the system slowly goes anaerobic with the passage of time (Benson et al., 2007). Five cases were tested (Table 1), each in triplicate, with *Agrobacterium sp.*

186 applied to vessels containing wood (<0.15 mm, non-autoclaved), newspaper and no waste,
187 whilst control vessels with only methanogens (no *Agrobacterium*) were supplied with wood
188 or newspaper. All bioreactors were incubated in the water bath apparatus at 30 °C for 35
189 days. Liquid samples (5 ml) were taken periodically for analysis (section 2.3) from the
190 sampling port using sterile pipettes and transferred to 15 ml sterile containers. Solid residue
191 was obtained from all bioreactors by collection on Whatman No. 42 ® filter paper (2.5 µm)
192 via vacuum filtration then drying at 105 °C. Biogas collected during the experiment in 5
193 litre Tedlar gas bags was analysed for methane content.

194 Progressively diminishing rates of biogas and organic carbon release for newspaper
195 reactors prompted a ‘restarting’ of the experiment, where the contents of the bioreactors
196 were centrifuged at 3394 rcf for 10 min under aseptic conditions to remove the supernatant
197 and fresh autoclaved M9 was added in the same amounts as the beginning of the test (see
198 above). This allowed for the hypothesis that towards the end of the experiment (whilst there
199 is still carbon present in the liquid phase but gas production has almost stopped),
200 accumulation of recalcitrant or toxic substances in the liquid phase inhibits further
201 conversion/breakdown to biogas to be tested. ‘Restarting’/removing the liquid and
202 introducing a fresh medium could be beneficial and allow for biogas production to continue
203 again from the left-over solid residue. ‘Restarted’ bioreactors were incubated under the
204 same conditions for 20 additional days, with liquid and gas sampling.

205 Impact of Solid:Liquid Ratio on Bacterial Biodelignification (Experiment 2): Previous
206 work has shown that microbial activity is affected by the waste to inoculum ratio (with
207 particularly low ratios shown to inhibit methanogenesis) (Moset et al., 2015). As mentioned
208 previously, to test the hypothesis that the solid:liquid ratio might also play an important role

in the ability of the *Agrobacterium sp.* to breakdown lignocellulose, the impact of the Solid:Liquid (S:L) ratio on bacterial biodelignification of these wastes was also studied by increasing the mass of waste added to 12 g. The experiments (Table 1) are otherwise the same as the earlier bioreactor-scale tests, apart from there not being a ‘waste-free’ control triplicate. A 4 g test (for wood and newspaper respectively) was also carried out as a repeat of that in the previous experiment to allow comparability and to serve as controls to test the above hypothesis.

Bioreactor-scale Enzymatic Biodelignification (Experiment 3): 1 L (total volume) tests to study whether enhanced biodegradation could be achieved using lignin peroxidase. Treatments are summarised in Table 1. 4 g of waste ≤ 2 mm, i.e. newspaper or wood (non-autoclaved), and 2.22 mg of lignin peroxidase (LiP) were added to 600 ml of sludge (source of methanogens) for a volatile solids ratio of sludge to waste of 4:1 (Labatut et al., 2011). The reason for a much larger sludge volume here pertains to the fact that inoculum to substrate ratio is a major factor in the determination of the biomethane potential of a substrate (Raposo et al., 2006), hence the enzyme experiments were conducted at the ideal volatile solids ratio of the sludge to the waste based on previous studies (Moset et al., 2015; Peña Contreras et al., 2018). The chosen waste:LiP mass ratio was based on previous work (Hettiaratchi et al., 2014; Hettiaratchi et al., 2015; Jayasinghe et al., 2011; Jayasinghe et al., 2014; Jayasinghe et al., 2013) where the volatile solids (VS):LiP ratio was optimised for maximum biogas production. LiP was activated with H_2O_2 prior to addition at the optimal LiP: H_2O_2 ratio (Hettiaratchi et al., 2014; Jayasinghe et al., 2011; Jayasinghe et al., 2013). The controls comprised of exactly the same experimental setup but lacked the peroxidase enzyme in ‘waste-containing’ controls. ‘Waste-free’ controls were also carried out with 0

232 and 2.22 mg of LiP. All bioreactors were incubated at 38 °C, as this is the optimal
233 operational temperature employed by the anaerobic digester used as the source of
234 methanogens.

235 **Table 1.** Conditions tested in the three main experiments. Numbers refer to number of replicates for each treatment.

	Experiment 1		Experiment 2		Experiment 3	
	With <i>Agrobacterium</i>	Without <i>Agrobacterium</i>	With <i>Agrobacterium</i>	Without <i>Agrobacterium</i>	With enzyme*	Without enzyme*
No waste	3				3	2
Newspaper (4 g)	3	3	3		3	2
Newspaper (12 g)			3			
Wood (4 g)	3	3	3		3	2
Wood (12 g)			3			

*Note: Wood sample size < 0.15 mm, apart from samples denoted with * which had size < 2mm. Other experimental conditions are as described in the text.*

236 **Table 2.** Waste Characterisation.

Sample	VS (%)	OC (%)	Lignin (%)
Wood	99.62 ± 0.00	50.60 ± 0.40	38.45 ± 0.13
Newspaper	84.26 ± 0.00	36.72 ± 8.09	25.73 ± 0.89

237 *Note: Data presented as percentage of dry mass.*

2.3 Analytical Methods

Liquids: All 5 ml liquid samples taken during bioreactor experiments were filtered through sterile 0.2 μm filters prior to analysis. The pH was measured on the entire sample post-filtration according to standard methods (APHA, 2012). The Folin-Ciocalteu method was used for measuring phenol release (Meda et al., 2005; Rashid et al., 2017). 0.8 ml of deionized water and 0.5 ml Folin-Ciocalteu's reagent (Merck F9252) were added to 0.2 ml filtered liquid sample. 2.5 ml of 20% Na_2CO_3 was then added and the samples incubated in the dark for 30 min. Then the absorbance was measured using a spectrophotometer at 760 nm and p-hydroxybenzoic acid was used to calibrate the absorbance as a standard. A 1 ml portion of the filtered sample was used for soluble organic carbon (sOC) analyses *via* a Shimadzu TOC-VCPH following the manufacturer's instructions whilst 0.5 ml was used for total and soluble chemical oxygen demand (COD and sCOD) analyses and 1ml was used for determining total/dry solids (TS and DS) for sludge characterisation all according to standard methods (APHA, 2012).

Solids: Lignin content and solid organic carbon analyses were carried out on the solid residue collected post-experiment. Lignin content analysis on the solid residue was adapted from Rashid et al., 2017. The samples were dried at 105°C until constant weight, then 0.25 g of dry mass was added to 3.75 ml of 95% H_2SO_4 with stirring for 2 h at RTP. Then 140 ml of deionised water was added to the resulting solution followed by reflux for 4 h in round bottom flasks. The residual content was collected via Whatman No. 42 ® filter paper (2.5 μm) and washed with deionised water. Then the residue was dried at 105°C until constant weight. The residue was then volatilised at 550°C to correct for ash. The lignin content was determined by subtracting the mass of ash from that of the dry residue and then

calculating the ratio of this to the original sample dry mass. The solid total/organic carbon (TC/OC) were measured via a Shimadzu TOC-VCPH following the manufacturer's instructions. Volatile solids (VS) analysis was carried out according to standard methods.

Gases: The methane concentration of the biogas was determined via gas chromatography (GC) analysis on a Varian 450 GC equipped with a flame ionisation detector and a methaniser using a CP Sil5 CB column (50m, 0.33mm diameter, He carrier gas).

2.4 Statistical Analyses

Two-way ANOVA and Student's T-test were carried out. Statistical significance was attributed at $P < 0.05$ (i.e. ANOVA F-value $> F_{\text{critical}}$). Correlations between data (specifically for the sCOD and sOC values) were identified via Pearson correlation initially and plotted against each other to further study the correlations.

3 RESULTS & DISCUSSION

3.1 Waste Characterisation

The composition of the model wastes is shown In [Table 2](#). Volatile solids content of a substrate indicates the fraction that has the potential to be converted to biogas (Barlaz et al., 1989; Eleazer et al., 1997; Wang et al., 1994). The wood was almost entirely composed of volatile matter, whereas newspaper had some ash content. This is comparable to recent work studying the chemical composition of different wastes (Chickering et al., 2018; Krause et al., 2017; Krause et al., 2016). As the aforementioned studies also suggested, ash content likely comes from fillers and ink constituents within the newspaper. The wood was very rich in lignin and also has a higher organic carbon content compared to the newspaper. Bearing in mind the variability in waste composition that arises around the world, in

relation to recent work, these values fall within the typical ranges reported (De la Cruz et al., 2014; Wang & Barlaz, 2016).

3.2 Bacterial Enhancement

Small-scale: Total carbon release profiles from the preliminary small-scale experiments conducted on the non-autoclaved and autoclaved ≤ 0.15 mm and ≤ 2 mm wood are shown in **Figures 1a and 1b**. In the presence of the *Agrobacterium sp.*, a steady and significant increase in the carbon present in the liquid phase occurred for the non-autoclaved ≤ 0.15 mm samples (black circle, Fig. 1a) (~20% relative to the control, $P < 0.05$, ANOVA F-values $> F$ -critical) during the 7-day experiment. Since the only source of carbon in these experiments was lignocellulose from wood, and the soluble carbon content was determined post-filtration through 0.2 μ m pore-size filters (even bacterial cells should not be passing through into the supernatant), it is highly likely that the release of carbon corresponds to biodegradation due to the bacterium. The profiles for the non-autoclaved < 0.15 mm wood controls (grey circle, Fig. 1a) remain steady and virtually unchanged, suggestive of no activity in the absence of the bacterium. No significant impact on the sTC release profiles due to the *Agrobacterium sp.* on 2 mm particles (Fig. 1b, autoclaved and non-autoclaved) was recorded ($P > 0.05$, ANOVA F-values $< F$ -critical). The sTC profile in the presence of the *Agrobacterium sp.* is consistently lower for 2 mm samples (non-autoclaved and autoclaved, dotted lines denote bacterium augmentation), which could be explained by the bacterium metabolising leached carbon from the wood.

It is noted that the < 0.15 mm autoclaved wood containing the *Agrobacterium sp.* (black dotted line, Fig. 1a) starts at a lower sTC on day 0 (black dotted line, Fig. 1a), however, the increase in total sTC released in solution is ~30% higher in comparison to the increase

found in the control, hence indicating lignocellulosic breakdown of the solid matrix due to bacterial enhancement.

To confirm the liquid phase carbon release results, the organic carbon analysis of the solid residue post-treatment with the *Agrobacterium sp.* for wood under different conditions is shown in **Figure 1c**. The organic carbon in ≤ 0.15 mm samples is significantly lower (two-way ANOVA, $P < 0.05$, $F\text{-values} > F\text{-critical}$) in the treated samples for both autoclaved and non-autoclaved wood samples (by 8.6 and 7.5% respectively), indicating higher levels of breakdown of the lignocellulosic structure due to *Agrobacterium sp.* treatment. With 2 mm wood there is no significant difference due to bacterial enhancement. It is expected that the much higher surface area to volume ratio, and accessibility of the < 0.15 mm samples is the key cause of the much better solid OC breakdown due to *Agrobacterium sp.* treatment in this set of samples in comparison to the 2mm size.

Overall, the preliminary small-scale data suggest that *Agrobacterium sp.* can break down woody lignocellulose, and that the particle size is an important factor in the rate of reaction when applying this *Agrobacterium sp.* strain for biodegradation. Treating wood by autoclaving does not significantly impact the biodelignification ability of this bacterium.

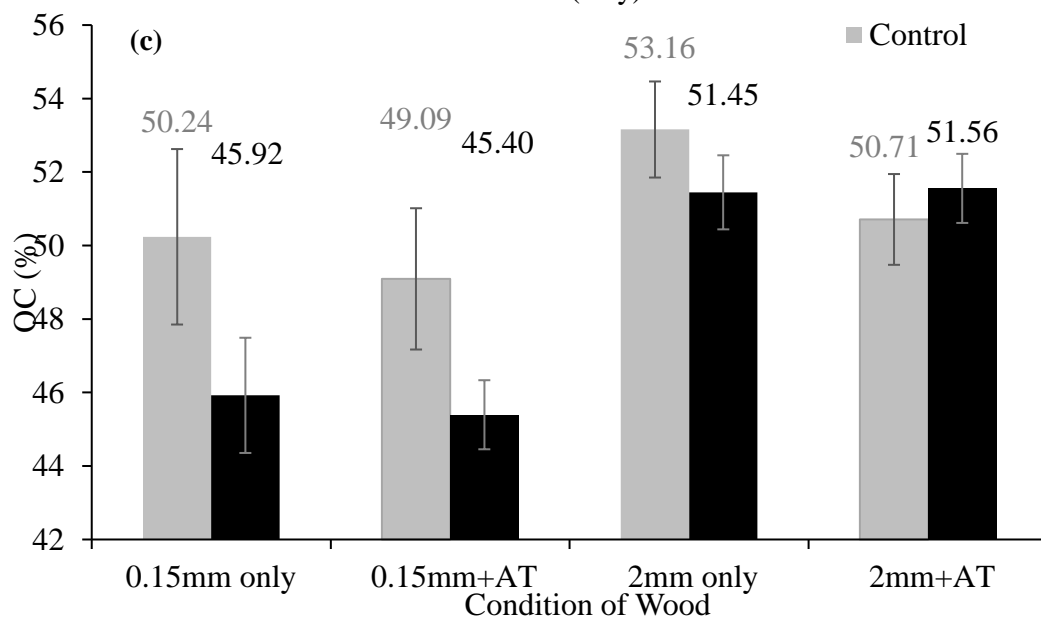
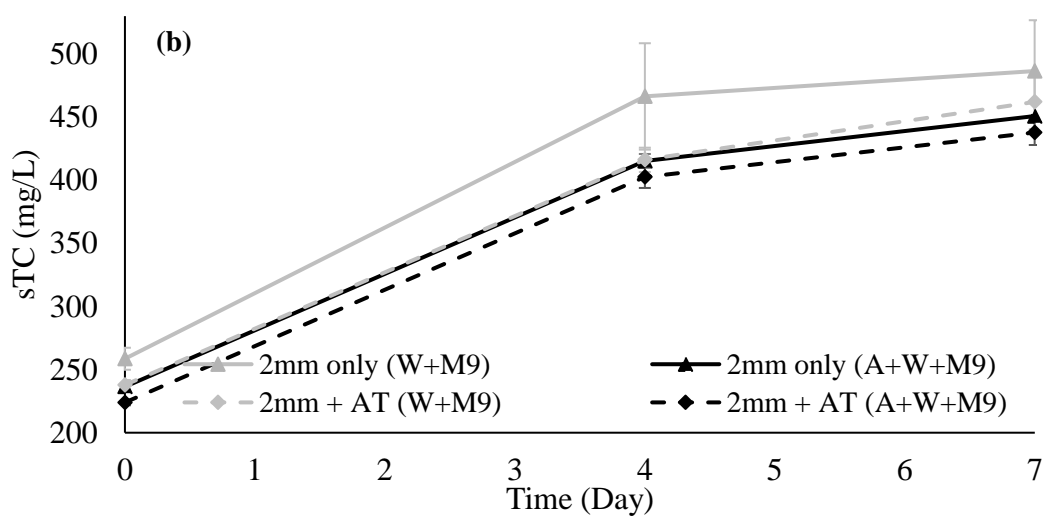
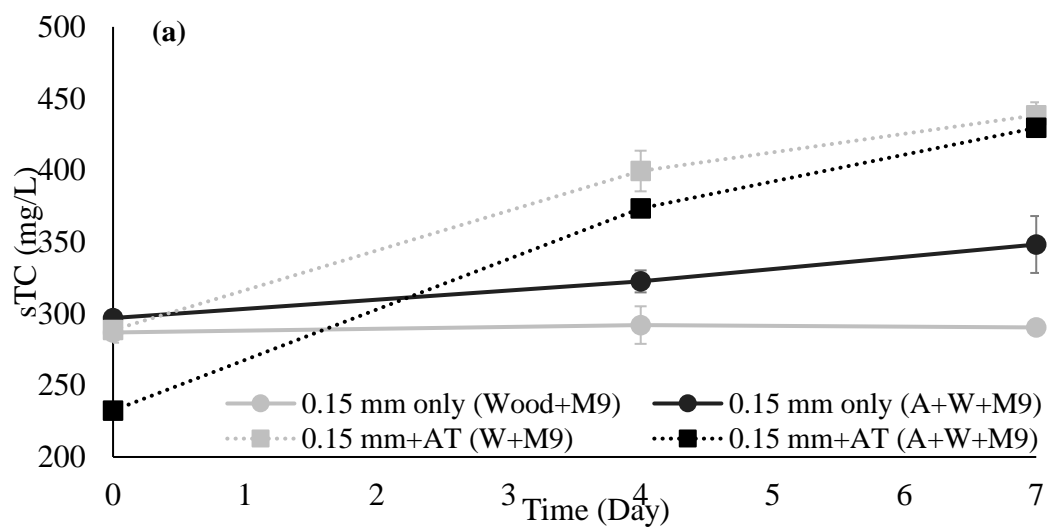


Figure 1. Assessing the impact of *Agrobacterium* sp. treatment on wood lignocellulose under different conditions. (a) Soluble liquid total carbon release results for the small-scale 0.15 mm tests. (b) Soluble liquid total carbon release results for the small-scale 2mm tests. (c) Solid phase organic carbon results for the small-scale experiments. All error bars represent +/- 1 standard deviation. Abbreviations: *Agrobacterium*, A; Autoclaved, AT; Wood, W; M9 solution, M9.



[Bioreactor-scale \(Experiment 1\)](#): The cumulative biogas profiles released from newspaper in Experiment 1 are shown in **Figure 2a**. After a lag-phase of ~7-8 days, *Agrobacterium* sp. nearly doubled the biogas production in newspaper reactors compared to controls without *Agrobacterium* ~92% enhancement, $P < 0.05$) whilst no response was observed without waste materials. At the same time, the sCOD and sOC profiles (**Figure 2c, 2d**) exhibit a consistently lower amount of organic carbon in solution with newspaper and *Agrobacterium* sp. than in newspaper controls. These data suggest that the *Agrobacterium* sp. enhance the release of carbon from the solid phase and increase the conversion of dissolved carbon to biogas. In controls with newspaper, the total amount of OC released into solution is ~0.32 g whilst the OC released in total as biogas is 0.04 g, giving a total of ~0.36 g. In specimens with *Agrobacterium* sp. and newspaper, ~0.31 g of OC was released into solution by the end of the experiment, but the amount of biogas was 0.08 g, giving a total of ~0.39 g. These data indicate greater release of solid organic carbon into solution and greater conversion of that soluble OC to biogas in the presence of *Agrobacterium* sp., leaving less in solution. With 1.4 g of solid OC present initially, in the presence of the *Agrobacterium* sp. there is an ~8.2% increase in the total release of OC in relation to the

control. The observed effects most likely result from the *Agrobacterium sp.* breaking down either solid phase or leached organic materials into a form utilisable by the methanogens.

For the newspaper reactors, the sOC and sCOD profiles increase gradually with increasing biogas production and result in overall accumulation towards the end of the experiment of organic carbon in the liquid phase. It is hypothesised that the cause was accumulation of recalcitrant organics and other degradation products which are not converted to the gas phase and which hinder the activity of the microorganisms. Therefore, an attempt was made to ‘restart’ the experiments by replacing the liquid fraction with fresh autoclaved M9 on Day 35. Following this, however, little to no additional activity was observed (Figure 2). As such, the flat-lining of the biogas and sCOD/sOC curves is likely to be due to a different limiting factor.

No significant effect was observed on biogas production due to the addition of the *Agrobacterium sp.* strain to wood (Figure 2b). Similarly, no significant increase in sCOD or sOC was observed in this experiment. A possible explanation for this, and an important difference between the preliminary small-scale and bioreactor experiment 1 is the concentration of wood in the overall volume. For the small-scale wood biodegradation tests, the S:L ratio was 0.05 g/ml, and a significant impact of bacterial treatment on the woody lignocellulose was observed, whereas here it was 0.006 g/ml (~8.3 times more dilute). It is possible that the wood was not sufficiently concentrated in the bioreactors to either observe a measurable response or to stimulate microbial activity.

365

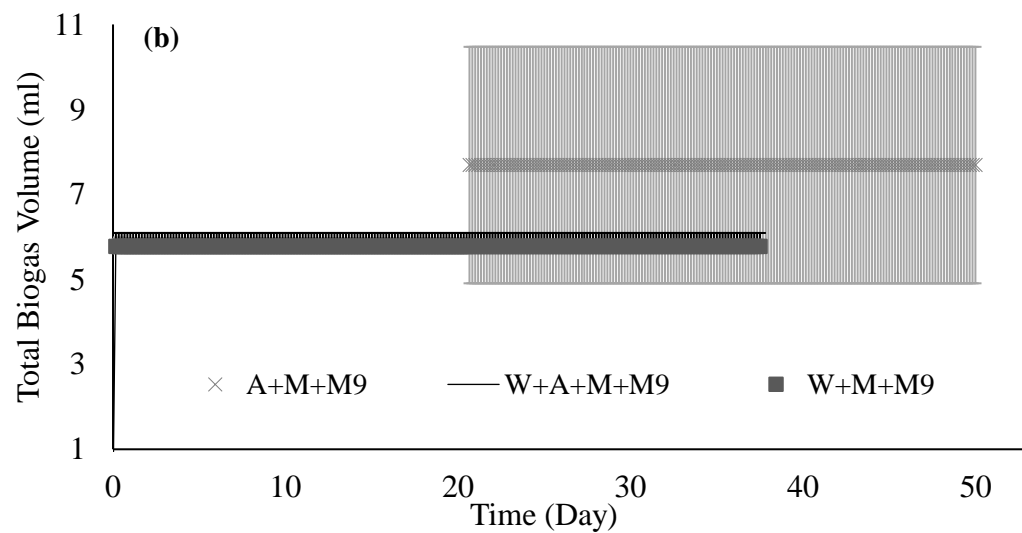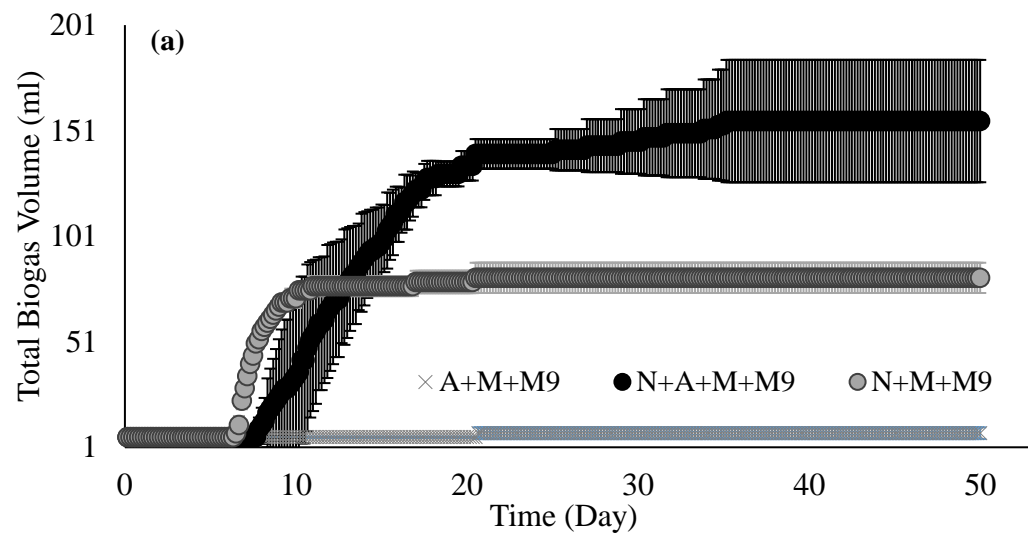

366

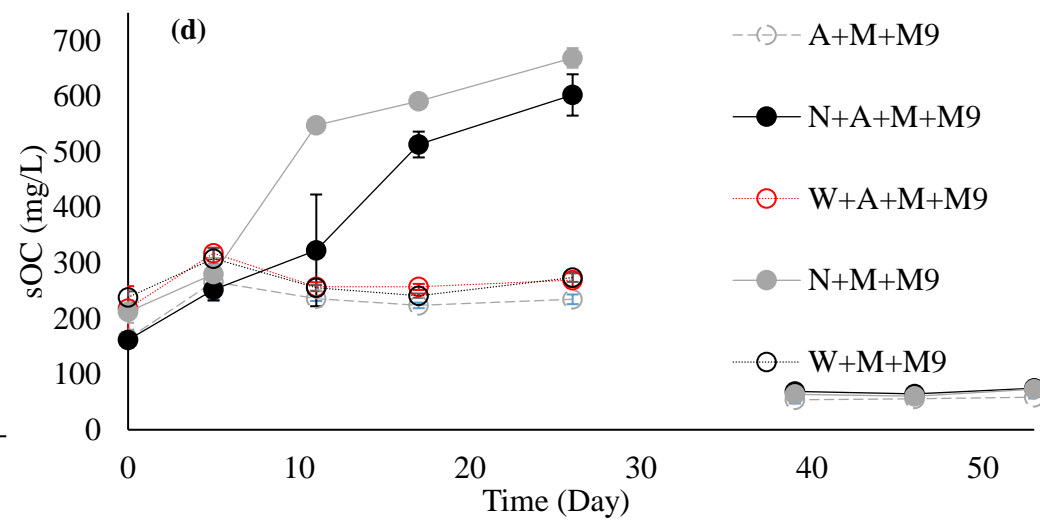
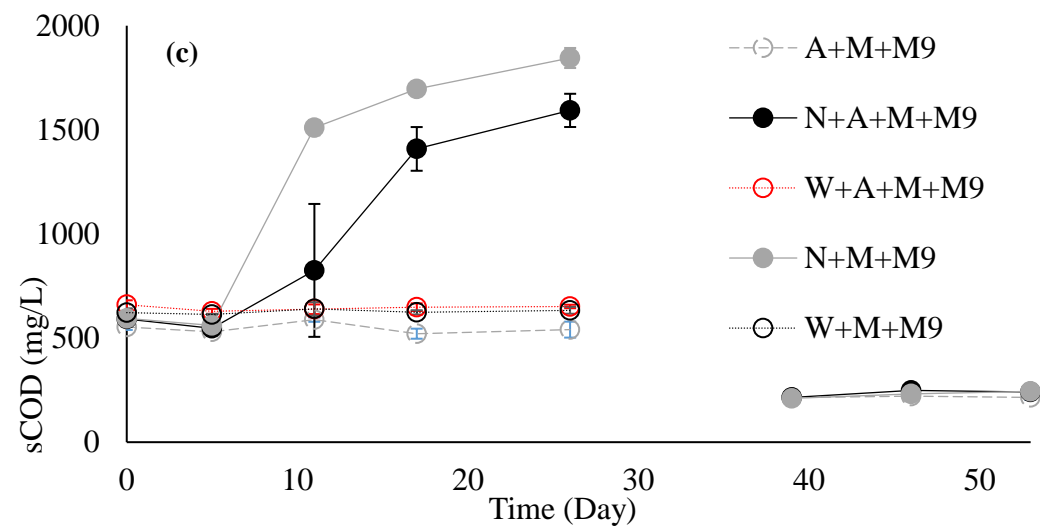





Figure 2. Assessing the impact of *Agrobacterium* sp. treatment on newspaper and wood lignocellulose in the presence of sludge. (a) Cumulative biogas volume results for newspaper. (b) Cumulative biogas volume results for wood. (c) Soluble chemical oxygen demand profiles. (d) Soluble organic carbon profiles. Note: system ‘restarted’ on Day 35, last liquid sampling point was at day 26 before the ‘restart’. All error bars represent +/- 1 standard deviation. Abbreviations: *Agrobacterium*, A; Methanogens, M; Newspaper, N; Wood, W; M9 solution, M9.

Impact of increasing solid:liquid (S:L) ratio (Experiment 2): The lack of a response from wood exposed to *Agrobacterium* sp. in the first bioreactor experiment was hypothesised to be due to a combination of a slow biodegradation rate and a low S:L ratio. Increasing the S:L ratio from 0.006 g/ml to 0.017 g/ml had a significant impact on the cumulative biogas volume for both lignocellulosic wastes (**Figure 3a -wood, Figure 4a -newspaper**).

In the case of wood, the biogas for the higher S:L ratio was increased by ~205%. Changing the S:L ratio has been shown to have a significant impact on the biogas kinetics and cumulative volume of the organic fraction of MSW (Krause et al., 2017; Krause et al., 2016; Raposo et al., 2006). Although, to the best of our knowledge, this has not been investigated in the application of bacterial biodelignification systems on wood lignocellulose. The wood sCOD profile (**Figure 3c**) increases and reaches a peak around day 14 then decreases gradually. The sOC profile (**Figure 3b**) does not seem to strictly follow this exact trend of reaching a peak followed by gradual decrease. sCOD is indicative of the amount of oxygen required to oxidise the carbon present, and the more oxygen required, the more carbon is present in solution or roughly the same amount is present, but in a more complex structure which is more difficult to oxidise. The general trend in sCOD

is an increase then a gradual decrease. The sOC increases and then stays reasonably steady with a higher value measured in the wood cases. A possible explanation of these observations might have to do with the form of the carbon released. The fact that sCOD lowers but the sOC does not perhaps indicates that the form of the soluble compounds might have gone from more complex structures, to more simple structures that may be relatively easier to convert to biogas, i.e. end-product of anaerobic digestion.

It is important to note that at the very high S:L of 0.05 g/ml in the small-scale tests, a very flat line for the total carbon profile for the ≤ 0.15 mm wood controls was recorded. Whereas here, the sCOD profile due to the addition of the bacterium is transient and follows a logical pattern of lignocellulosic breakdown (i.e. ~31% increase in the first two weeks) and methanogenesis to convert that carbon to the gas phase (i.e. evidence from biogas production profile, and decrease of sCOD by ~16% relative to the maximum peak-value reached in the first two weeks). As such, it is suggested that the liquid analyses results discussed here are most likely due to the *Agrobacterium sp.* acting in synergy with the microbes from the sludge for depolymerisation of wood.

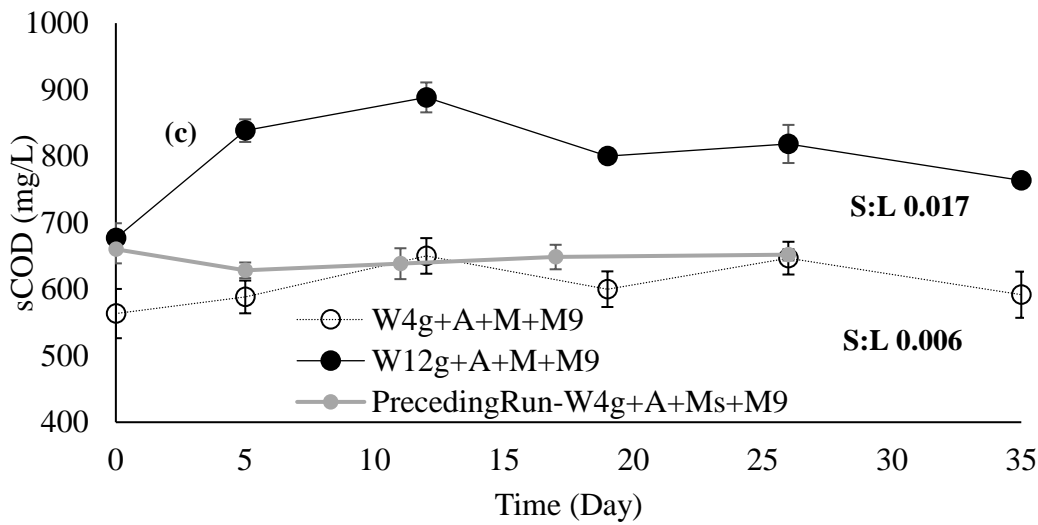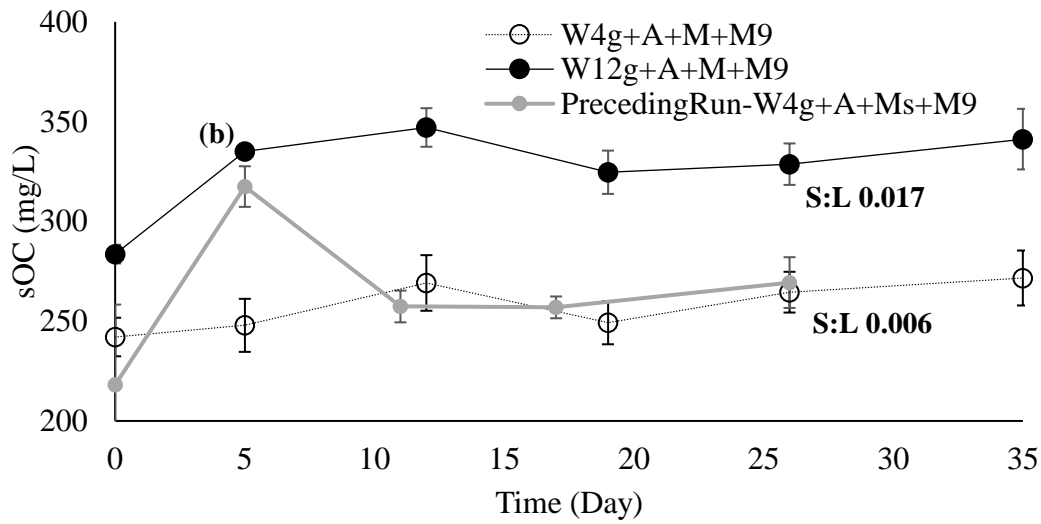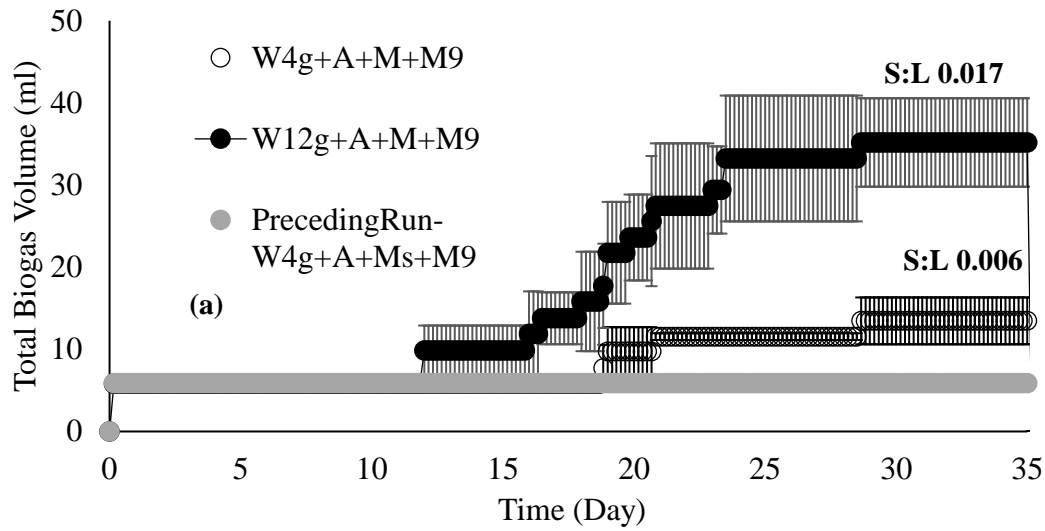

407 **Figure 3.** Assessing the impact of increasing S:L ratio on *Agrobacterium* sp. treatment of
408 wood lignocellulose with sludge. (a) Cumulative biogas volume for wood. (b) Soluble
409 organic carbon profiles for wood. (c) Soluble chemical oxygen demand profiles for wood.
410 All error bars represent +/- 1 standard deviation. Abbreviations: *Agrobacterium*, A;
411 Methanogens, M; Wood, W; M9 solution, M9; 4 grams mass of waste, 4g; 12 grams mass
412 of waste, 12g; PrecedingRun, data from the preceding run from Fig.2, identical
413 experimental conditions to S:L 0.006 and included to account for inter-experimental
414 variability, since sludge for the S:L experiments was sampled at a later date.

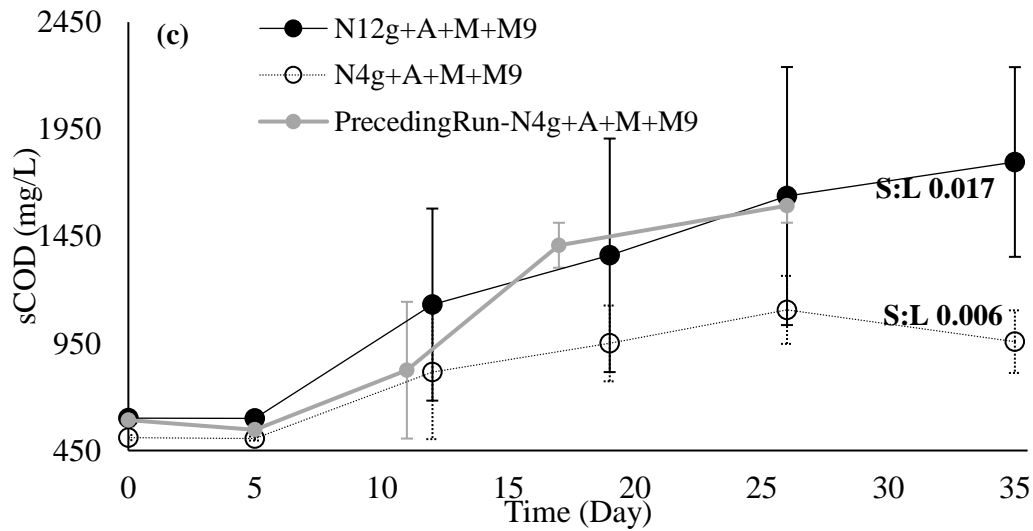
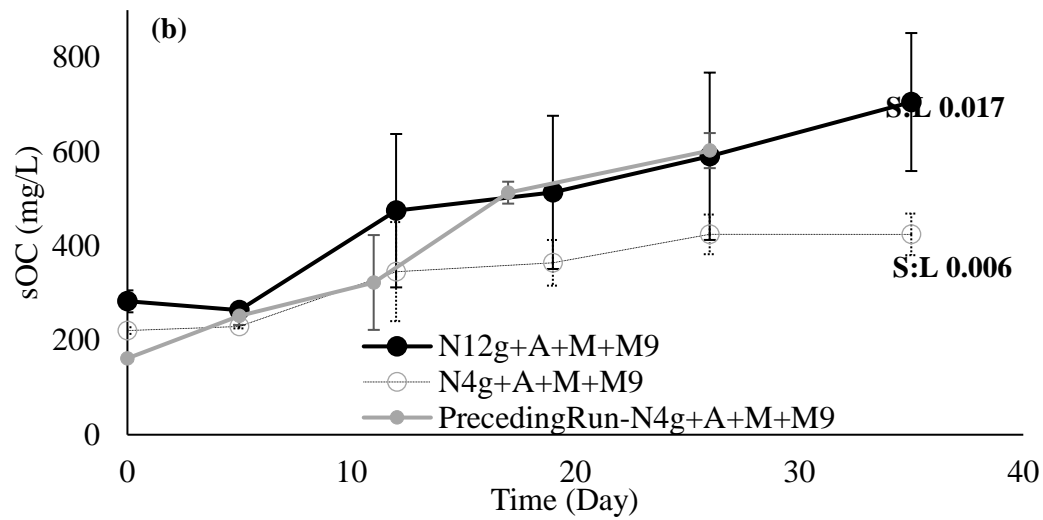
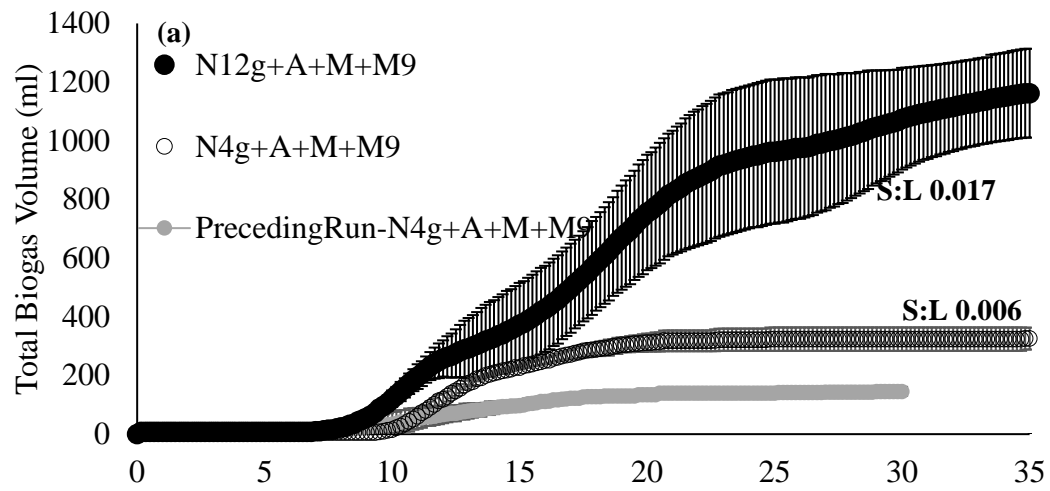


Figure 4. Assessing the impact of increasing S:L ratio on *Agrobacterium* sp. treatment of newspaper lignocellulose with sludge. (a) Cumulative biogas volume for newspaper. (b) Soluble organic carbon profiles for newspaper. (c) Soluble chemical oxygen demand profiles for newspaper. All error bars represent +/- 1 standard deviation. Abbreviations: *Agrobacterium*, A; Methanogens, M; Newspaper, N; M9 solution, M9; 4 grams mass of waste, 4g; 12 grams mass of waste, 12g; PrecedingRun, data from the preceding run from Fig.2, identical experimental conditions to S:L 0.006 and included to account for inter-experimental variability, since sludge for the S:L experiments was sampled at a later date.

In **Figure 4b and 4c** the newspaper sOC and sCOD profiles are shown respectively. In the case of newspaper, the biogas volume was 280% greater than that at the lower S:L ratio. The cumulative overall volume for newspaper at the lower S:L ratio was significantly different ($P < 0.05$; approximately double) to that obtained previously with the same conditions (**Figure 4a**). This may have arisen due to variability in the newspaper composition (a different sub-sample was milled for this test) or variability in the microbial community from the sludge, since this was sampled 4 months after the previous test, albeit from the same site/digester/sampling point. However, it is clear that with all else equal the higher S:L ratio gives a significantly greater degree of biodegradation. For newspaper, the sOC and sCOD profiles follow a similar trend to the previously reported **Figure 2b, 2c**.

To study the impact of S:L ratio on the activity of the *Agrobacterium* sp. and overall biogas generation as a continuum, this ratio could be further increased or decreased under similar experimental conditions. This would perhaps allow for optimisation of the microbial processes studied. However, since the aim of this paper has been to gain mechanistic insights, optimisation has been beyond the scope of this study.




From the above bioreactor experiments, it is obvious that under all conditions, newspaper clearly produces much higher biogas yields than wood and shows a greater degree of enhancement (Fig. 2, 3, 4). This is likely due to a combination of two main factors. Firstly, due to the much higher lignin content of softwood (~1.5 times more than newspaper) (Table 2), which results in more recalcitrant biomass in comparison to wood. Secondly, newspaper, is a mechanical pulp which in relation to softwood is more processed, this likely also results in better accessibility to key polymers for degradation (Baldwin et al., 1998; Barlaz, 2006; Eleazer et al., 1997; Stinson & Ham, 1995; Wang et al., 1994).

3.3 Enzymatic Enhancement

In Figures 5 and 6 biogas profiles/values and net biomethane yields per gram of VS due to the action of LiP are shown. A small positive effect on biogas/biomethane yields due to the enzyme for just the bioreactors containing sludge and no waste took place ($P<0.05$) (Figures 5 and 6). This is likely a result of the enzyme breaking down suspended and/or dissolved recalcitrant organics present in the sludge which would otherwise not be broken down by the microbial communities present, which can then be utilised for metabolism and eventually be converted to biogas.

A significant ($P<0.05$) enhancement in biomethane potential from newspaper of ~41% was achieved with LiP present. LiP is thought to form reactive free radicals that attack the non-phenolic parts of the lignocellulosic structure (Bugg et al., 2011a; Bugg et al., 2011b; Cragg et al., 2015). The enhancement is possibly a result of the enzyme attacking the lignocellulosic structure of newspaper, thereby providing additional substrate to the microorganisms from the sludge which can then be converted to biogas.

461 In the enzyme-containing bioreactor cases discussed above, in addition to the overall
462 biogas volume being enhanced, the proportion of methane also seems to be higher in the
463 presence of the enzyme. This observation suggests that enzymatic enhancement in these
464 reactors not only increased the overall biogas yield, but also the specific methane
465 production, thereby increasing its concentration in the biogas mixture.

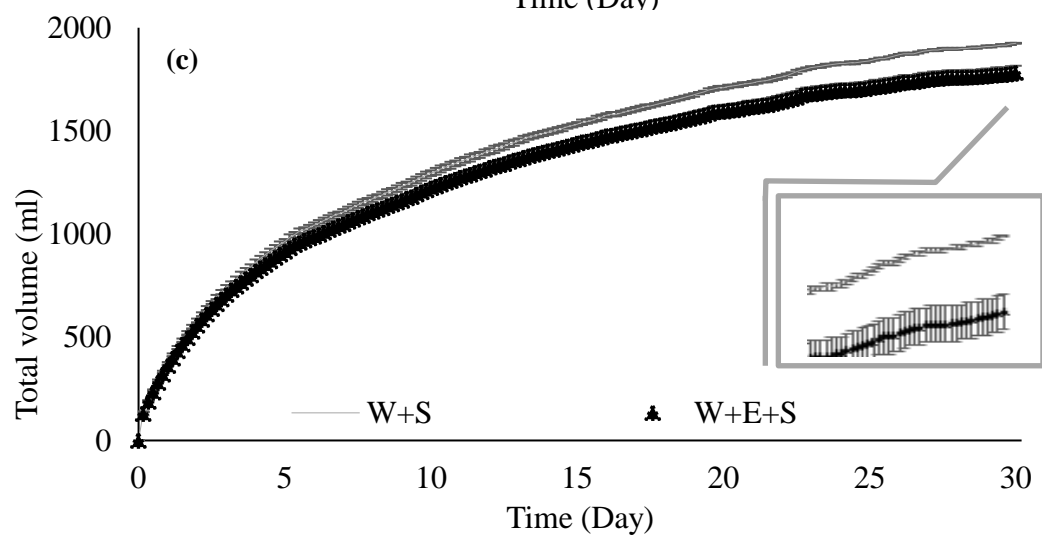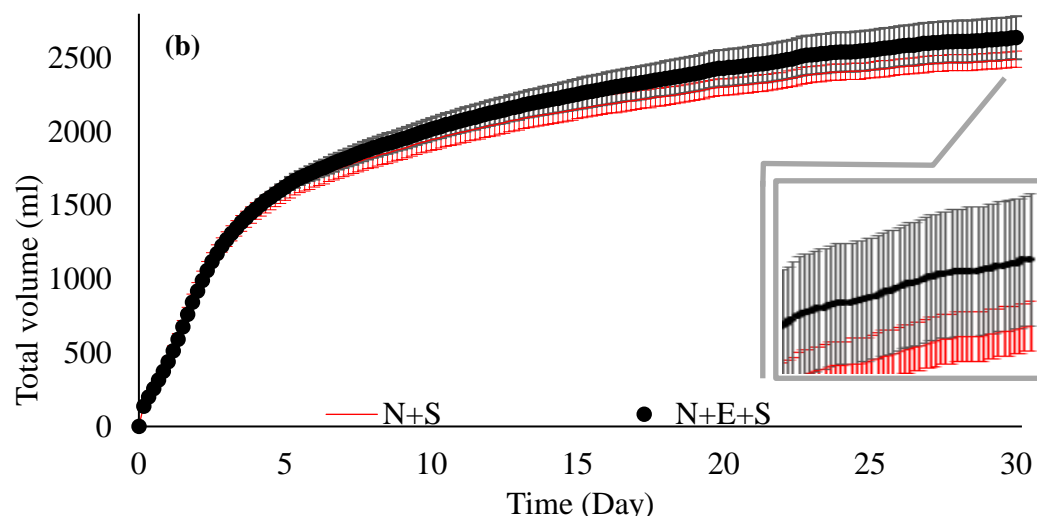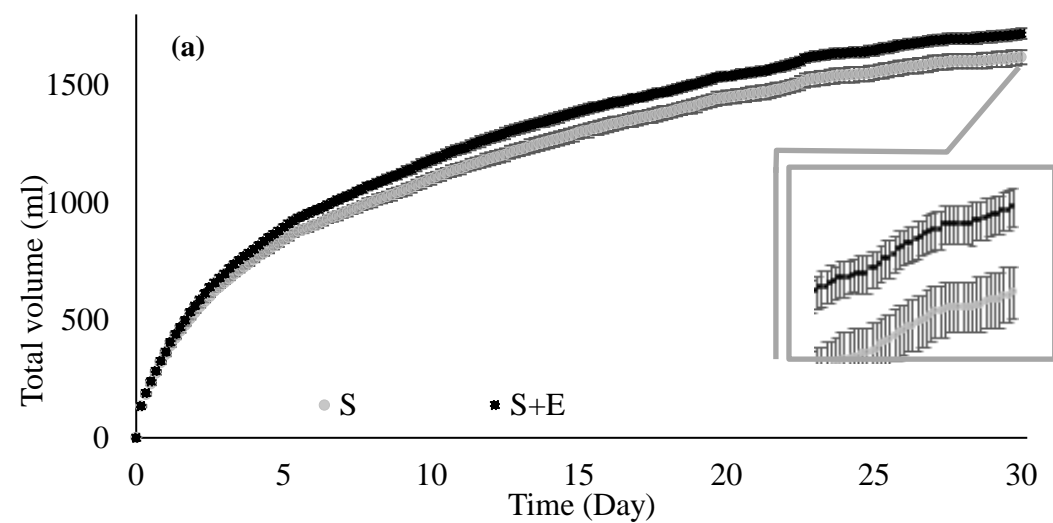

467 **Figure 5.** Cumulative biogas generation profile results. Assessing the impact of lignin
468 peroxidase application on newspaper and wood. (a) Sludge only. (b) Newspaper. (c) wood.
469 All error bars represent +/- 1 standard deviation. Abbreviations: Sludge, S; lignin
470 peroxidase enzyme, E; Newspaper, N; Wood, W. Inset figures included for closer
471 examination of the gas generation profiles towards the end of the test.

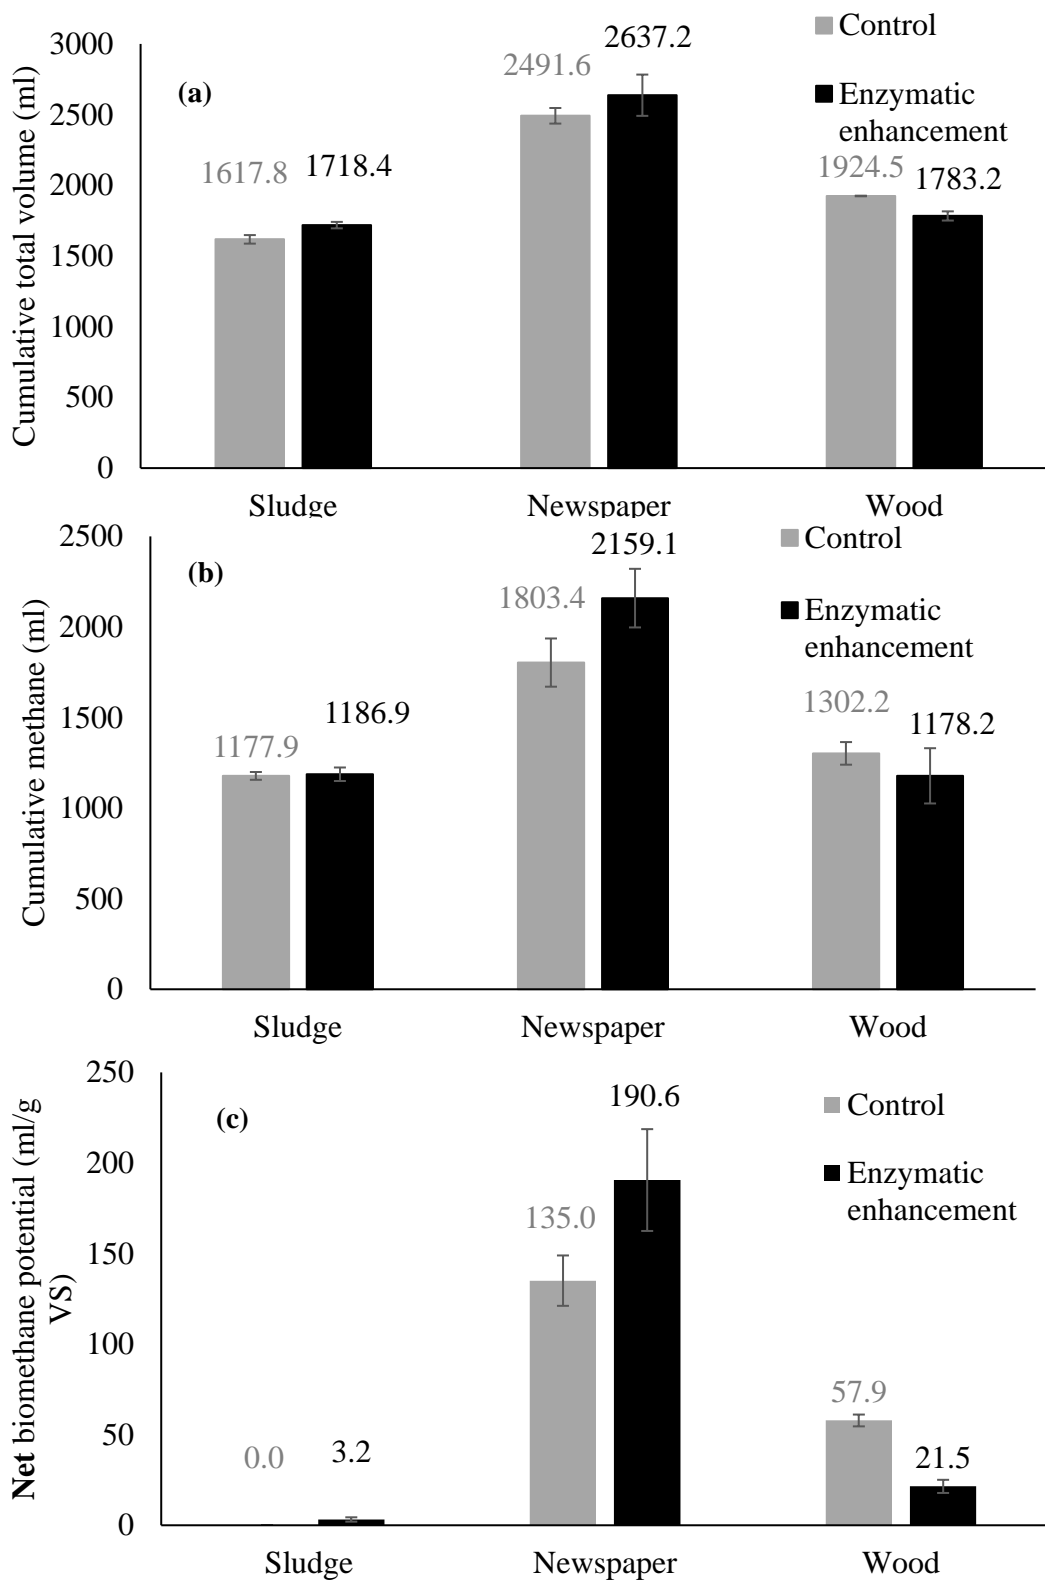


Figure 6. Biogas and methane yield results. Assessing the impact of lignin peroxidase application on newspaper and wood. (a) Cumulative biogas volume comparison for bioreactors. (b) Cumulative methane generated in bioreactors over the 30-day experimental run. (c) Net methane yield per gram of VS. All error bars represent +/- 1 standard deviation.

In bioreactors containing wood, there was a significantly lower amount of biomethane production ($P < 0.05$, **Figures 5,6**) in the enzyme-augmented reactors compared to the control. This effect was also found by Schroyen et al. (Schroyen et al., 2017; Schroyen et al., 2014; Schroyen et al., 2015), where not all lignocellulosic substances responded positively to pre-treatment through peroxidase enzymes prior to anaerobic digestion, in some instances the treatment negatively impacted methane production (e.g. with corn stover, wheat straw, maize). No significant changes in phenolics (which at high concentrations can inhibit methanogenesis (Hernandez & Edyvean, 2004)), TCOD or any transient changes in pH were observed within the first two weeks in comparison to the controls (data not shown). At low concentrations of LiP and similar fungal peroxidases in relation to the amount of lignin, the peroxidase enzyme has been said to catalyse repolymerisation of lignin alongside depolymerisation (Cragg et al., 2015; Rahmanpour et al., 2017; Rahmanpour et al., 2016; Rashid et al., 2017). Repolymerisation of lignin means that lignin would precipitate back onto the surface and recent work has shown that this has a negative impact on the accessibility of the lignocellulosic structure to biodegradation (Li et al., 2007; MacAskill et al., 2018; Oliva-Taravilla et al., 2016; Wiman et al., 2012). Due to the very high lignin content of softwood (nearly double that of newspaper), it is possible that the concentration of LiP was low for these reactors, and that depolymerisation and simultaneous repolymerisation led to the lower methane yield in the enzyme-amended

reactors. The lignin content of the wood residue is slightly higher (38.17 ± 0.42) in the enzyme reactors in relation to the controls (37.22 ± 0.02), one possible reason for which could be re-polymerisation, although this difference is not statistically significant (two-way ANOVA $P > 0.05$, $F\text{-values} < F\text{-critical}$). It might be that lignin droplets (post-depolymerisation) coalesced onto the surface of the wood (re-polymerisation) and resulted in slightly higher lignin contents in relation to the controls and lesser access for the microbes to the cellulose fibres resulting in lower methane yields as shown in **Figures 5 and 6**.

3.4 General Discussion of Bacterial and Enzyme Experiments

Agrobacterium sp., isolated from MSW soil, was tested (Rashid et al., 2017). for its ability to break down softwood bark chips in compost under aerobic conditions, showing an approximately 2.3-3.5-fold enhancement in biogas production. The enhancement of a ~2-fold enhancement reported here is comparable to this, despite the methanogenic microbial communities from organic compost used by (Rashid et al., 2017) and the anaerobic sewage sludge (this study) being very different. In addition, compost certainly contains aerobic strains which could result in much better initial hydrolysis of the lignocellulose making it easier for the various strains tested to then attack the structure. Much of the work carried out on bacterial breakdown of lignocellulosic wastes in the literature (Chandra et al., 2007; Mathews et al., 2016; Mathews et al., 2015; Mathews et al., 2014; Mnich et al., 2017; Tsapekos et al., 2017) has not specifically paired this process with simultaneous methanogenesis as has been done in the current present study and that of (Rashid et al., 2017) as such this study has helped to shed more light into this gap in understanding.

Schroyen et al. applied peroxidase enzymes to lignocellulosic materials (Schroyen et al., 2017; Schroyen et al., 2014; Schroyen et al., 2015). Interestingly, the case where they were able to obtain maximum enhancement of biogas from corn stover (4.5% lignin) was with a laccase treatment, not peroxidase or their mixture, and it resulted in a 17% increase in methane yield. In comparison in this study a ~41% enhancement was obtained in biomethane potential (25.7% lignin in this newspaper, [Table 2](#)). In Schroyen et al.'s mixture of laccase and peroxidase pre-treatments, they studied 7 substrates and obtained biogas enhancement only in 4 (hemp: 4.8%, miscanthus: 9.5%, flax: 14%, willow: 40%), whilst the pre-treatment had a negative impact on the biogas production of the rest of the substrates (in ensilaged maize, the pre-treatment instead of enhancing biogas production, nearly halved it). Their work suggested that enzymatic biodelignification is a treatment that depends highly on the nature of the substrate, it may actually have a negative impact in some lignocellulosic wastes, the reasons for which are not clear as of yet. Interestingly, the substrates studied in their study and ours suggest that it is not entirely clear as to why the peroxidase enzyme treatment works with some wastes, and not with others. Looking at the lignin contents, there does not seem to be a relationship between high lignin contents and proportionally negative impact on peroxidase enzyme action. However, lignin is predominantly made up of guaiacyl and syringyl monomers, where the former is less cross-linked than the latter and in comparison, is an easier lignin-monomer to breakdown. Syringyl-rich lignin has also been shown to negatively impact the growth of some lignin-degrading fungi (Hooker et al., 2018). It might be the case that the monomeric composition of lignin plays an important role in the success of peroxidase treatment, whereby wastes

with high syringyl monomeric units (e.g. softwood) may be more difficult to attack than say wastes made up predominantly of guaiacyl units (e.g. hardwood).

Jayasinghe et al. applied LiP and similar fungal peroxidases to partly degraded 30-year old excavated MSW (Hettiaratchi et al., 2014; Hettiaratchi et al., 2015; Jayasinghe et al., 2011; Jayasinghe et al., 2014; Jayasinghe et al., 2013). They also observed a positive impact of LiP on biomethane generation. However the increase in biogas yields recorded by them was nearly an order of magnitude larger than the control compared to the 41% increase in biomethane potential in the case of newspaper in this study. This may be due to the age of their waste, since for very old landfilled waste, significant degradation of the biomass likely occurred making the structure of the waste more accessible to enzymatic attack. On the other hand, this study used virgin materials and since newspaper is made from a mechanical pulp, much of the lignocellulosic structure is still intact (Eleazer et al., 1997; Wang et al., 2015; Wang et al., 1994).

From the experimental work carried out in this paper, it has been obvious that both the lignocellulosic wastes, wood and newspaper, responded to treatment by the *Agrobacterium* *sp.*, whilst only newspaper responded positively to the peroxidase enzyme treatment. Possible reasons for these results and biogas yields obtained have been discussed. It has been highlighted that one of the major factors resulting in the different response exhibited by wood and newspaper has been due to the lignocellulosic structure and particularly, lignin content of the individual wastes. Finally, in comparison with enzymatic biodelignification, delignifying bacteria are present in landfills (the strain used here was isolated from landfill soil) and so there may be the potential to enhance their activity to encourage enhanced biogas recovery.

4 CONCLUSIONS

Agrobacterium sp. enhances the biodegradation of lignin-containing wastes, specifically newspaper and softwood, under idealised small-scale conditions, containing numerous other microbial communities. The solid:liquid ratio is a potentially important variable for the application of *Agrobacterium sp.* and should be considered for pilot-/field-scale trials (e.g. by adjusting leachate table). Lignin peroxidase enhances the biodegradation of newspaper (not wood), in conjunction with methanogenic bacteria. These results suggest that enhanced breakdown of real wastes in MSW landfills and processes such as anaerobic digestion is feasible using either technique but that the waste form is an important factor in the rate and extent of breakdown.

ACKNOWLEDGMENTS

We thank Goran Mahmood Rashid and Tim Bugg for supplying the *Agrobacterium sp.* culture, Devin Sapsford, Steven Warwick and Jose Javier Munoz Criollo for fruitful discussions regarding certain aspects of the work, and the funding bodies for their financial support. We also thank James Carter from Cardiff University's School of Chemistry for help with GC analyses, and Marco Santonastaso and Jeff Rowlands for technical assistance in the laboratory. We also thank Snehasis Tripathy for constructive comments during the earlier drafts of this paper. Raw data can be obtained by contacting the corresponding author. **The authors have no competing interests to declare.**

Funding Sources: Financial support was provided to the first author by Cardiff University and Environmental Research and Education Foundation.

REFERENCES

APHA. 2012. Standard Methods for the Examination of Water and Wastewater.

586 Baldwin, T.D., Stinson, J., Ham, R.K. 1998. Decomposition of specific materials buried within
587 sanitary landfills. *Journal of Environmental Engineering-Asce*, **124**(12), 1193-1202.

588 Barlaz, M.A. 2006. Forest products decomposition in municipal solid waste landfills. *Waste Manag*,
589 **26**(4), 321-33.

590 Barlaz, M.A., Schaefer, D.M., Ham, R.K. 1989. Bacterial population development and chemical
591 characteristics of refuse decomposition in a simulated sanitary landfill. *Appl Environ Microbiol*,
592 **55**(1), 55-65.

593 Benson, C.H., Barlaz, M.A., Lane, D.T., Rawe, J.M. 2007. Practice review of five
594 bioreactor/recirculation landfills. *Waste Manag*, **27**(1), 13-29.

595 Brandt, A., Gräsvik, J., Hallett, J.P., Welton, T. 2013. Deconstruction of lignocellulosic biomass
596 with ionic liquids. *Green Chemistry*, **15**(3).

597 Bugg, T.D., Ahmad, M., Hardiman, E.M., Rahmanpour, R. 2011a. Pathways for degradation of
598 lignin in bacteria and fungi. *Nat Prod Rep*, **28**(12), 1883-96.

599 Bugg, T.D., Ahmad, M., Hardiman, E.M., Singh, R. 2011b. The emerging role for bacteria in lignin
600 degradation and bio-product formation. *Curr Opin Biotechnol*, **22**(3), 394-400.

601 Chandra, R., Raj, A., Purohit, H.J., Kapley, A. 2007. Characterisation and optimisation of three
602 potential aerobic bacterial strains for kraft lignin degradation from pulp paper waste. *Chemosphere*,
603 **67**(4), 839-46.

604 Chickering, G.W., Krause, M.J., Townsend, T.G. 2018. Determination of as-discarded methane
605 potential in residential and commercial municipal solid waste. *Waste Manag*, **76**, 82-89.

606 Cragg, S.M., Beckham, G.T., Bruce, N.C., Bugg, T.D., Distel, D.L., Dupree, P., Etxabe, A.G.,
607 Goodell, B.S., Jellison, J., McGeehan, J.E., McQueen-Mason, S.J., Schnorr, K., Walton, P.H.,
608 Watts, J.E., Zimmer, M. 2015. Lignocellulose degradation mechanisms across the Tree of Life.
609 *Curr Opin Chem Biol*, **29**, 108-19.

610 De la Cruz, F.B., Chanton, J.P., Barlaz, M.A. 2013. Measurement of carbon storage in landfills
611 from the biogenic carbon content of excavated waste samples. *Waste Manag*, **33**(10), 2001-5.

612 De la Cruz, F.B., Yelle, D.J., Gracz, H.S., Barlaz, M.A. 2014. Chemical changes during anaerobic
613 decomposition of hardwood, softwood, and old newsprint under mesophilic and thermophilic
614 conditions. *J Agric Food Chem*, **62**(27), 6362-74.

615 Eleazer, W.E., Odle, W.S., Wang, Y.S., Barlaz, M.A. 1997. Biodegradability of municipal solid
616 waste components in laboratory-scale landfills. *Environmental Science & Technology*, **31**(3), 911-
617 917.

618 Geoffrey, D. 2003. Microview of Wood under Degradation by Bacteria and Fungi. in: *Wood*
619 *Deterioration and Preservation: Advances in Our Changing World*, (Eds.) B.S. Goodell, D.D.
620 Nicholas, T.P. Schultz, Oxford University Press. California, USA, pp. 34-67.

621 Hassan, S.S., Williams, G.A., Jaiswal, A.K. 2018. Emerging technologies for the pretreatment of
622 lignocellulosic biomass. *Bioresour Technol*, **262**, 310-318.

623 Hernandez, J.E., Edyvean, R.G. 2004. Anaerobic treatment of phenol in a two-stage anaerobic
624 reactor. *Waste Management and the Environment II*, 203-211.

625 Hettiaratchi, J.P., Jayasinghe, P.A., Bartholameuz, E.M., Kumar, S. 2014. Waste degradation and
626 gas production with enzymatic enhancement in anaerobic and aerobic landfill bioreactors.
627 *Bioresour Technol*, **159**, 433-6.

628 Hettiaratchi, P., Jayasinghe, P., Tay, J.H., Yadav, S. 2015. Recent Advances of Biomass Waste to
629 Gas Using Landfill Bioreactor Technology - A Review. *Current Organic Chemistry*, **19**(5), 413-
630 422.

631 Hooker, C.A., Hillman, E.T., Overton, J.C., Ortiz-Velez, A., Schacht, M., Hunnicutt, A., Mosier,
632 N.S., Solomon, K.V. 2018. Hydrolysis of untreated lignocellulosic feedstock is independent of S-
633 lignin composition in newly classified anaerobic fungal isolate, *Piromyces* sp. UH3-1. *Biotechnol*
634 *Biofuels*, **11**, 293.

635 Jayasinghe, P.A., Hettiaratchi, J.P., Mehrotra, A.K., Kumar, S. 2011. Effect of enzyme additions on
636 methane production and lignin degradation of landfilled sample of municipal solid waste. *Bioresour*
637 *Technol*, **102**(7), 4633-7.

638 Jayasinghe, P.A., Hettiaratchi, J.P., Mehrotra, A.K., Kumar, S. 2014. Reaction mechanisms and rate
 639 constants of waste degradation in landfill bioreactor systems with enzymatic-enhancement.
 640 *Bioresour Technol*, **162**, 279-82.

641 Jayasinghe, P.A., Hettiaratchi, J.P.A., Mehrotra, A.K., Steele, M.A. 2013. Enhancing Gas
 642 Production in Landfill Bioreactors: Flow-Through Column Study on Leachate Augmentation with
 643 Enzyme. *Journal of Hazardous, Toxic, and Radioactive Waste*, **17**(4), 253-258.

644 Krause, M.J., Chickering, G.W., Townsend, T.G., Pullammanappallil, P. 2017. Effects of
 645 temperature and particle size on the biochemical methane potential of municipal solid waste
 646 components. *Waste Manag.*

647 Krause, M.J., W. Chickering, G., Townsend, T.G., Reinhart, D.R. 2016. Critical review of the
 648 methane generation potential of municipal solid waste. *Critical Reviews in Environmental Science
 649 and Technology*, **46**(13), 1117-1182.

650 Labatut, R.A., Angenent, L.T., Scott, N.R. 2011. Biochemical methane potential and
 651 biodegradability of complex organic substrates. *Bioresour Technol*, **102**(3), 2255-64.

652 Leonowicz, A., Matuszewska, A., Luterek, J., Ziegenhagen, D., Wojta -Wasilewska, M., Cho, N.-
 653 S., Hofrichter, M., Rogalski, J., -Wasilewska, W. 1999. REVIEW: Biodegradation of Lignin by
 654 White Rot Fungi. *Fungal Genetics and Biology*, **27**, 175-185.

655 Li, J., Henriksson, G., Gellerstedt, G. 2007. Lignin depolymerization/repolymerization and its
 656 critical role for delignification of aspen wood by steam explosion. *Bioresour Technol*, **98**(16), 3061-
 657 8.

658 MacAskill, J.J., Suckling, I.D., Lloyd, J.A., Manley-Harris, M. 2018. Unravelling the effect of
 659 pretreatment severity on the balance of cellulose accessibility and substrate composition on
 660 enzymatic digestibility of steam-pretreated softwood. *Biomass and Bioenergy*, **109**, 284-290.

661 Mathews, S.L., Grunden, A.M., Pawlak, J. 2016. Degradation of lignocellulose and lignin by
 662 *Paenibacillus glucanolyticus*. *International Biodeterioration & Biodegradation*, **110**, 79-86.

663 Mathews, S.L., Pawlak, J., Grunden, A.M. 2015. Bacterial biodegradation and bioconversion of
664 industrial lignocellulosic streams. *Appl Microbiol Biotechnol*, **99**(7), 2939-54.

665 Mathews, S.L., Pawlak, J.J., Grunden, A.M. 2014. Isolation of *Paenibacillus glucanolyticus* from
666 pulp mill sources with potential to deconstruct pulping waste. *Bioresour Technol*, **164**, 100-5.

667 Meda, A., Lamien, C.E., Romito, M., Millogo, J., Nacoulma, O.G. 2005. Determination of the total
668 phenolic, flavonoid and proline contents in Burkina Fasan honey, as well as their radical scavenging
669 activity. *Food Chemistry*, **91**(3), 571-577.

670 Mnich, E., Vanholme, R., Oyarce, P., Liu, S., Lu, F., Goeminne, G., Jorgensen, B., Motawie, M.S.,
671 Boerjan, W., Ralph, J., Ulvskov, P., Moller, B.L., Bjarnholt, N., Harholt, J. 2017. Degradation of
672 lignin beta-aryl ether units in *Arabidopsis thaliana* expressing LigD, LigF and LigG from
673 *Sphingomonas paucimobilis* SYK-6. *Plant Biotechnol J*, **15**(5), 581-593.

674 Moset, V., Al-zohairi, N., Møller, H.B. 2015. The impact of inoculum source, inoculum to substrate
675 ratio and sample preservation on methane potential from different substrates. *Biomass and*
676 *Bioenergy*, **83**, 474-482.

677 O'Dwyer, J., Walshe, D., Byrne, K.A. 2017. Wood waste decomposition in landfills: An assessment
678 of current knowledge and implications for emissions reporting. *Waste Manag.*

679 Oliva-Taravilla, A., Tomas-Pejo, E., Demuez, M., Gonzalez-Fernandez, C., Ballesteros, M. 2016.
680 Phenols and lignin: Key players in reducing enzymatic hydrolysis yields of steam-pretreated
681 biomass in presence of laccase. *J Biotechnol*, **218**, 94-101.

682 Pearse, L.F., Hettiaratchi, J.P., Kumar, S. 2018. Towards developing a representative biochemical
683 methane potential (BMP) assay for landfilled municipal solid waste – A review. *Bioresource*
684 *Technology*.

685 Pecorini, I., Baldi, F., Carnevale, E.A., Corti, A. 2016. Biochemical methane potential tests of
686 different autoclaved and microwaved lignocellulosic organic fractions of municipal solid waste.
687 *Waste Manag*, **56**, 143-50.

688 Peña Contreras, K., Sánchez Yáñez, J., Aguilar-Virgen, Q., Taboada-González, P., Marquez-
689 Benavides, L. 2018. Potential for Methane Generation by Lignocellulosic Household Waste.
690 *Sustainability*, **10**(10).

691 Rahmanpour, R., King, L.D., Bugg, T.D. 2017. Identification of an extracellular bacterial
692 flavoenzyme that can prevent re-polymerisation of lignin fragments. *Biochem Biophys Res*
693 *Commun*, **482**(1), 57-61.

694 Rahmanpour, R., Rea, D., Jamshidi, S., Fulop, V., Bugg, T.D. 2016. Structure of *Thermobifida*
695 *fusca* DyP-type peroxidase and activity towards Kraft lignin and lignin model compounds. *Arch*
696 *Biochem Biophys*, **594**, 54-60.

697 Raposo, F., Banks, C.J., Siegert, I., Heaven, S., Borja, R. 2006. Influence of inoculum to substrate
698 ratio on the biochemical methane potential of maize in batch tests. *Process Biochemistry*, **41**(6),
699 1444-1450.

700 Rashid, G.M., Duran-Pena, M.J., Rahmanpour, R., Sapsford, D., Bugg, T.D. 2017. Delignification
701 and Enhanced Gas Release from Soil Containing Lignocellulose by Treatment with Bacterial Lignin
702 Degradars. *J Appl Microbiol*.

703 Schroyen, M., Van Hulle, S.W.H., Holemans, S., Vervaeren, H., Raes, K. 2017. Laccase enzyme
704 detoxifies hydrolysates and improves biogas production from hemp straw and miscanthus.
705 *Bioresour Technol*, **244**(Pt 1), 597-604.

706 Schroyen, M., Vervaeren, H., Van Hulle, S.W., Raes, K. 2014. Impact of enzymatic pretreatment on
707 corn stover degradation and biogas production. *Bioresour Technol*, **173**, 59-66.

708 Schroyen, M., Vervaeren, H., Vandepitte, H., Van Hulle, S.W., Raes, K. 2015. Effect of enzymatic
709 pretreatment of various lignocellulosic substrates on production of phenolic compounds and
710 biomethane potential. *Bioresour Technol*, **192**, 696-702.

711 Stinson, J.A., Ham, R.K. 1995. Effect of Lignin on the Anaerobic Decomposition of Cellulose as
712 Determined through the Use of a Biochemical Methane Potential Method. *Environmental Science &*
713 *Technology*, **29**(9), 2305-2310.

714 Taylor, C.R., Hardiman, E.M., Ahmad, M., Sainsbury, P.D., Norris, P.R., Bugg, T.D. 2012.
 715 Isolation of bacterial strains able to metabolize lignin from screening of environmental samples. *J*
 716 *Appl Microbiol*, **113**(3), 521-30.
 717 Tsapekos, P., Kougias, P.G., Vasileiou, S.A., Treu, L., Campanaro, S., Lyberatos, G., Angelidaki, I.
 718 2017. Bioaugmentation with hydrolytic microbes to improve the anaerobic biodegradability of
 719 lignocellulosic agricultural residues. *Bioresour Technol*, **234**, 350-359.
 720 Wang, X., Barlaz, M.A. 2016. Decomposition and carbon storage of hardwood and softwood
 721 branches in laboratory-scale landfills. *Sci Total Environ*, **557-558**, 355-62.
 722 Wang, X., De la Cruz, F.B., Ximenes, F., Barlaz, M.A. 2015. Decomposition and carbon storage of
 723 selected paper products in laboratory-scale landfills. *Sci Total Environ*, **532**, 70-9.
 724 Wang, X., Padgett, J.M., Powell, J.S., Barlaz, M.A. 2013. Decomposition of forest products buried
 725 in landfills. *Waste Manag*, **33**(11), 2267-76.
 726 Wang, Y.S., Byrd, C.S., Barlaz, M.A. 1994. Anaerobic Biodegradability of Cellulose and
 727 Hemicellulose in Excavated Refuse Samples Using a Biochemical Methane Potential Assay.
 728 *Journal of Industrial Microbiology*, **13**(3), 147-153.
 729 Wickham, R., Galway, B., Bustamante, H., Nghiem, L.D. 2016. Biomethane potential evaluation of
 730 co-digestion of sewage sludge and organic wastes. *International Biodeterioration &*
 731 *Biodegradation*, **113**, 3-8.
 732 Wiman, M., Dienes, D., Hansen, M.A., van der Meulen, T., Zacchi, G., Liden, G. 2012. Cellulose
 733 accessibility determines the rate of enzymatic hydrolysis of steam-pretreated spruce. *Bioresour*
 734 *Technol*, **126**, 208-15.
 735 Wyman, V., Henriquez, J., Palma, C., Carvajal, A. 2017. Lignocellulosic waste valorisation strategy
 736 through enzyme and biogas production. *Bioresour Technol*, **247**, 402-411.
 737 Ximenes, F., Bjordal, C., Cowie, A., Barlaz, M. 2015. The decay of wood in landfills in contrasting
 738 climates in Australia. *Waste Manag*, **41**, 101-10.

739 Ximenes, F.A., Cowie, A.L., Barlaz, M.A. 2017. The decay of engineered wood products and paper
740 excavated from landfills in Australia. *Waste Management*.

741 Ximenes, F.A., Gardner, W.D., Cowie, A.L. 2008. The decomposition of wood products in landfills
742 in Sydney, Australia. *Waste Manag*, **28**(11), 2344-54.

743 Ximenes, F.A., Kathuria, A., Barlaz, M.A., Cowie, A.L. 2018. Carbon dynamics of paper,
744 engineered wood products and bamboo in landfills: evidence from reactor studies. *Carbon Balance*
745 *Manag*, **13**(1), 27.

746 Xu, R., Zhang, K., Liu, P., Han, H., Zhao, S., Kakade, A., Khan, A., Du, D., Li, X. 2018. Lignin
747 depolymerization and utilization by bacteria. *Bioresource Technology*.

748

749