

This is an Open Access document downloaded from ORCA, Cardiff University's institutional repository:<https://orca.cardiff.ac.uk/id/eprint/123862/>

This is the author's version of a work that was submitted to / accepted for publication.

Citation for final published version:

Le Boulbar, Emmanuel D., Jarvis, Lydia, Hayes, David , Shutts, Samuel , Li, Zhibo , Tang, Mingchu, Liu, Huiyun, Snowton, Peter M. and Abadia, Nicolas 2019. Characterization of gain and loss of In(Ga)As/GaAs quantum dot active region for high temperature operation. Presented at: UK Semiconductors Conference 2019 (UKSC 2019), Sheffield, England. U.K., 10-11 July 2019.

Publishers page: <https://ukacm.org/wp-content/uploads/proceedings/2...>

Please note:

Changes made as a result of publishing processes such as copy-editing, formatting and page numbers may not be reflected in this version. For the definitive version of this publication, please refer to the published source. You are advised to consult the publisher's version if you wish to cite this paper.

This version is being made available in accordance with publisher policies. See <http://orca.cf.ac.uk/policies.html> for usage policies. Copyright and moral rights for publications made available in ORCA are retained by the copyright holders.



Characterization of gain and loss of In(Ga)As/GaAs quantum dot active region for high temperature operation

Emmanuel D. Le Boulbar¹, Lydia Jarvis¹, David Hayes¹, Samuel Shutts¹, Zhibo Li¹, Mingchu Tang², Huiyun Liu², Peter M. Smowton², and Nicolás Abadía^{1,*}

¹Department of Physics and Astronomy, Cardiff University, Queens Building, The Parade, Cardiff CF24 3AA, United Kingdom

²Department of Electronic and Electrical Engineering, University College London, London WC1E 7JE, United Kingdom

*abadian@cardiff.ac.uk

Lasers integrated with electro-absorption modulators on III-V epitaxy have been reported, particularly using indium phosphide quantum well (QW) active regions. The use of quantum dots (QD) active regions is less reported. In this work, we investigate the possibility of integration of a laser and an electro-absorption modulator with the same In(Ga)As/GaAs QD active region. The main advantage of the use of QDs over QWs is a better tolerance to optical feedback [1], low threshold current [2], and temperature insensitivity [3]. The use of this QD active region could be exploited in low-cost uncooled short and medium reach optical interconnects with intensity modulation and direct detection.

We measured the behavior with temperature of an In(Ga)As/GaAs QD active region when used for light generation and modulation. The measurements were performed using the segmented contact method. A schematic is shown in Fig. 1. The net modal gain of the lasing active region and the net modal loss $\Delta\alpha$ of the absorbing active region as a function of temperature is shown in Fig. 2(a).

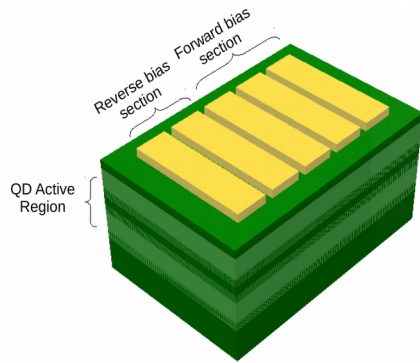


Figure 1: Schematic of the segmented contact method for a monolithic integrated QD laser and QD modulator for short and medium reach optical interconnects capable of operating up to 398 K.

As shown in Fig. 2(a), the extinction ratio of the modulator is 4 dB \cdot mm⁻¹ when reverse biasing the active region at -4.5 V and applying a peak-to-peak voltage ΔV_{pp} of 3 V. The extinction ratio and the insertion loss are shown in Fig. 2(b). Both values are constant up to 398 K. On the other hand, the net modal gain of the active region degrades from 5.65 cm⁻¹ at 300 K to 2.65 cm⁻¹ at 373 K. The wavelength taken for the net modal gain is the one that maximizes the extinction ratio in the modulator. The maximum gain which can be maintained over the entire temperature range is enough to overcome the loss of a 3 mm laser with as-cleaved facets. Additionally, the FP laser emission and the wavelength position at which the maximum extinction ratio was found shifts with temperature around 0.49 nmK⁻¹. These results open the possibility

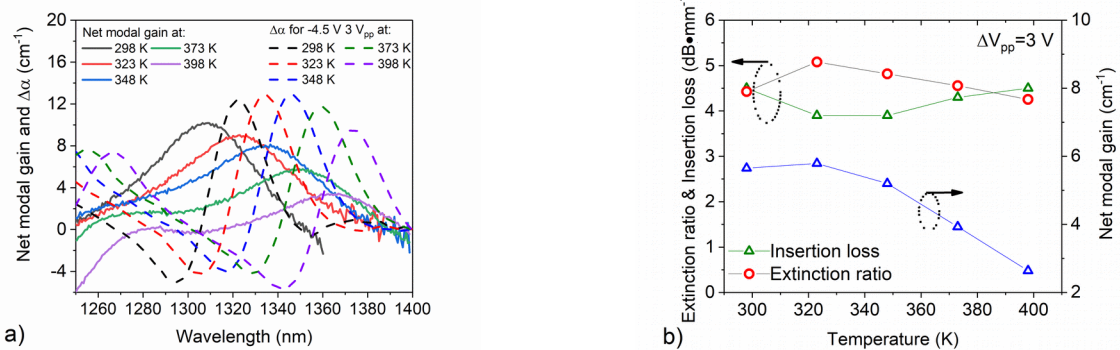


Figure 2: a) Net modal gain and change of absorption $\Delta\alpha$ of the QD active region, b) Insertion loss, extinction ratio and the net modal gain at the wavelength that maximizes the extinction ratio versus temperature

[1] H. Su et al., "High external feedback resistance of laterally loss-coupled distributed feedback quantum dot semiconductor lasers," IEEE Photon. Technol. Lett., vol. 5, no. 11, pp. 1504–1506, Nov. 2003.

[2] H. Y. Liu et al., "High-performance three-layer 1.3- μ m InAs-GaAs quantum-dot lasers with very low continuous-wave room-temperature threshold currents," IEEE Photon. Technol. Lett., vol. 17, no. 6, pp. 1139–1141, Jun. 2005.

[3] S. Fathpour et al., "The role of Auger recombination in the temperature-dependent output characteristics ($T_0 = \infty$) of p-doped 1.3 μ m quantum dot lasers," Appl. Phys. Lett., vol. 85, no. 22, pp. 5164–5166, Nov. 2004.

[4] Jinkwan Kwoen, Bongyong Jang, Katsuyuki Watanabe, and Yasuhiko Arakawa, "High-temperature continuous-wave operation of directly grown InAs/GaAs quantum dot lasers on on-axis Si (001)," Opt. Express 27, 2681–2688 (2019)