

This is an Open Access document downloaded from ORCA, Cardiff University's institutional repository: <https://orca.cardiff.ac.uk/id/eprint/130341/>

This is the author's version of a work that was submitted to / accepted for publication.

Citation for final published version:

Schweiker, Marcel, Ampatzi, Eleni , Andargie, Maedot S., Andersen, Rune Korsholm, Azar, Elie, Barthelmes, Verena M., Berger, Christiane, Bourikas, Leonidas, Carlucci, Salvatore, Chinazzo, Giorgia, Edappilly, Lakshmi Prabha, Favero, Matteo, Gauthier, Stephanie, Jamrozik, Anja, Kane, Michael, Mahdavi, Ardeshir, Piselli, Cristina, Pisello, Anna Laura, Roetzel, Astrid, Rysanek, Adam, Sharma, Kunind and Zhang, Shengbo 2020. Review of multi-domain approaches to indoor environmental perception and behaviour. *Building and Environment* 176 , 106804. 10.1016/j.buildenv.2020.106804

Publishers page: <http://dx.doi.org/10.1016/j.buildenv.2020.106804>

Please note:

Changes made as a result of publishing processes such as copy-editing, formatting and page numbers may not be reflected in this version. For the definitive version of this publication, please refer to the published source. You are advised to consult the publisher's version if you wish to cite this paper.

This version is being made available in accordance with publisher policies. See <http://orca.cf.ac.uk/policies.html> for usage policies. Copyright and moral rights for publications made available in ORCA are retained by the copyright holders.



Review of multi-domain approaches to indoor environmental perception and behaviour

Marcel Schweiker¹), Eleni Ampatzi²), Maedot S. Andargie³), Rune Korsholm Andersen⁴), Elie Azar⁵), Verena M. Barthelmes⁶), Christiane Berger⁷), Leonidas Bourikas⁸), Salvatore Carlucci⁹), ¹⁰), Giorgia Chinazzo¹¹), Lakshmi Prabha Edappilly¹²), ¹), Matteo Favero¹⁰), Stephanie Gauthier¹³), Anja Jamrozik¹⁴), Michael Kane¹⁵), Ardeshir Mahdavi⁷), Cristina Piselli¹⁶), Anna Laura Pisello¹⁶), Astrid Roetzel¹⁷), Adam Rysanek¹⁸), Kunind Sharma¹⁵), Shengbo Zhang¹⁹)

1) Building Science Group, Karlsruhe Institute of Technology, Karlsruhe, Germany;

2) Welsh School of Architecture, Cardiff University, Cardiff, UK;

3) Department of Civil and Mineral Engineering, University of Toronto, Toronto, Canada;

4) International Centre for Indoor Environment and Energy, Technical University of Denmark, Kgs. Lyngby, Denmark;

5) Department of Industrial and Systems Engineering, Khalifa University, Abu Dhabi, UAE;

6) Thermal Engineering for the Built Environment Laboratory, École polytechnique fédérale de Lausanne, Lausanne, Switzerland;

7) Department of Building Physics and Building Ecology, TU Wien, Vienna, Austria;

8) Lancaster Institute for the Contemporary Arts, Lancaster University, UK;

9) Energy, Environment, and Water Research Center, The Cyprus Institute, Nicosia, Cyprus;

10) Department of Civil and Environmental Engineering, Norwegian University of Science and Technology, Trondheim, Norway;

11) Department of Civil and Environmental Engineering, Northwestern University, Evanston, USA;

12) Department of Civil Engineering, Building Technology and Construction Management, Indian Institute of Technology Madras, India;

13) Faculty of Engineering & Physical Sciences, University of Southampton, Southampton, UK;

14) Breather Products Inc., Montreal, Canada;

15) Department of Civil and Environmental Engineering, Northeastern University, Boston, MA, USA;

16) Department of Engineering, University of Perugia, Perugia, Italy;

17) School of Architecture and Built Environment, Deakin University, Geelong, Australia;

18) School of Architecture and Landscape Architecture, the University of British Columbia, Vancouver, BC, Canada;

19) Department of Mechanical and Industrial Engineering, University of Toronto, Toronto, ON, Canada

Abstract

Building occupants are continuously exposed to multiple indoor environmental stimuli, including thermal, visual, acoustic, and air quality related factors. Moreover, personal and contextual aspects can be regarded as additional domains influencing occupants' perception and behaviour. The scientific literature in this area typically deals with these multiple stimuli in isolation. In contrast to single-domain research, multi-domain research analyses at least two different domains, for example, visual and thermal. The relatively few literature reviews that have considered multi-domain approaches to indoor-environmental perception and behaviour covered only a few dozen articles each. The present contribution addresses this paucity by reviewing 219 scientific papers on interactions and cross-domain effects that influence occupants' indoor environmental perception and behaviour. The objective of the present review is to highlight motivational backgrounds, key methodologies, and major findings of multi-domain investigations of human perception and behaviour in indoor environments. The in-depth review of these papers provides not only

1 an overview of the state of the art, but also contributes to the identification of existing
2 knowledge gaps in this area and the corresponding need for future research. In particular,
3 many studies use “convenience” variables and samples, there is often a lack of theoretical
4 foundation to studies, and there is little research linking perception to action.

5 **Key words**

6 Human perception; comfort; occupant behaviour; multi-physical; multi-perceptual;
7 contextual; personal; multi-domain

8 **1. Introduction**

9 ***1.1. Background and state-of-the-art***


10 Inhabitants of industrialized areas spend most of their time (85-96%) inside buildings [1;
11 2]. Meanwhile, the human sensory system receives information regarding multiple indoor
12 environmental exposures. Building energy consumption is significantly influenced by
13 occupant perception and behaviour; that is, occupants’ evaluation of thermal, visual,
14 acoustic, and air quality stimuli and their reactions to any resulting discomfort [3]. As such,
15 these four principal categories of environmental stimuli are integral to building design
16 standards [4]. Not all interactions of occupants with their built environment result from
17 dissatisfaction, but a close link between perception and behaviour exists [5].

18 While environmental stimuli occur simultaneously, the majority of scientific literature
19 considers environmental influences on human perception and occupant behaviour in
20 isolation. Literature reviews related to single-domain perceptions cover thermal [6-8],
21 visual [9-12], indoor air quality (IAQ) [13], or acoustic [14-16] perception, as well as single-
22 domain influences on occupants’ actions [5; 17-19]. An understanding of multi-domain
23 environmental effects is lacking. ASHRAE [4] states “*current knowledge on interactions*
24 *between and among factors that most affect occupants of indoor environments is limited*”.
25 Addressing this knowledge gap, Torresin et al. [20] proposed a multi-domain research
26 framework that identifies interactions and crossed effects between domains. Interactions
27 are combined effects of two or more distinct domains (e.g., thermal and visual), on a third
28 domain (e.g., overall environmental satisfaction). In contrast, crossed effects involve a main
29 effect of one domain (e.g., thermal stimuli) on another domain (e.g., visual perception).

30 Literature reviews on multi-domain approaches are less numerous. Recently, Torresin et
31 al. [20] identified 45 laboratory studies published after 1990 dealing with the effects of two
32 or more environmental domains on perception and performance. Earlier reviews were
33 based on smaller numbers of studies [21-23]. Frontczak et al. [23] reviewed nine studies
34 focusing on the influence of individual domains on overall satisfaction. Candas et al. [21]
35 discussed neurophysiological and behavioural findings on multisensory influences on
36 thermal perception based on 25 publications. Centnerová et al. [22] reviewed eight papers
37 with the same topic. The authors of this review could not identify earlier reviews
38 addressing multi-domain approaches related to occupant behaviour.


1 In addition to the four principal indoor environmental domains, contextual and personal
 2 variables influence occupants' perception and behaviour and are summarized in Figure 1
 3 and 2. Schweiker et al. [5] reviewed drivers of occupant behaviour, including contextual and
 4 personal factors. However, they did not examine interactions between these factors.
 5 Frontczak et al. [23] reviewed personal and contextual influences on overall satisfaction
 6 with the indoor environment. Schweiker et al. [8] included personal (psychological) and
 7 contextual factors in their review on individual differences in thermal perception. O'Brien
 8 et al. [24] concluded that most approaches analysed aggregated average models and
 9 diversity is captured through statistical approaches, without extracting personal or
 10 contextual factors.

11

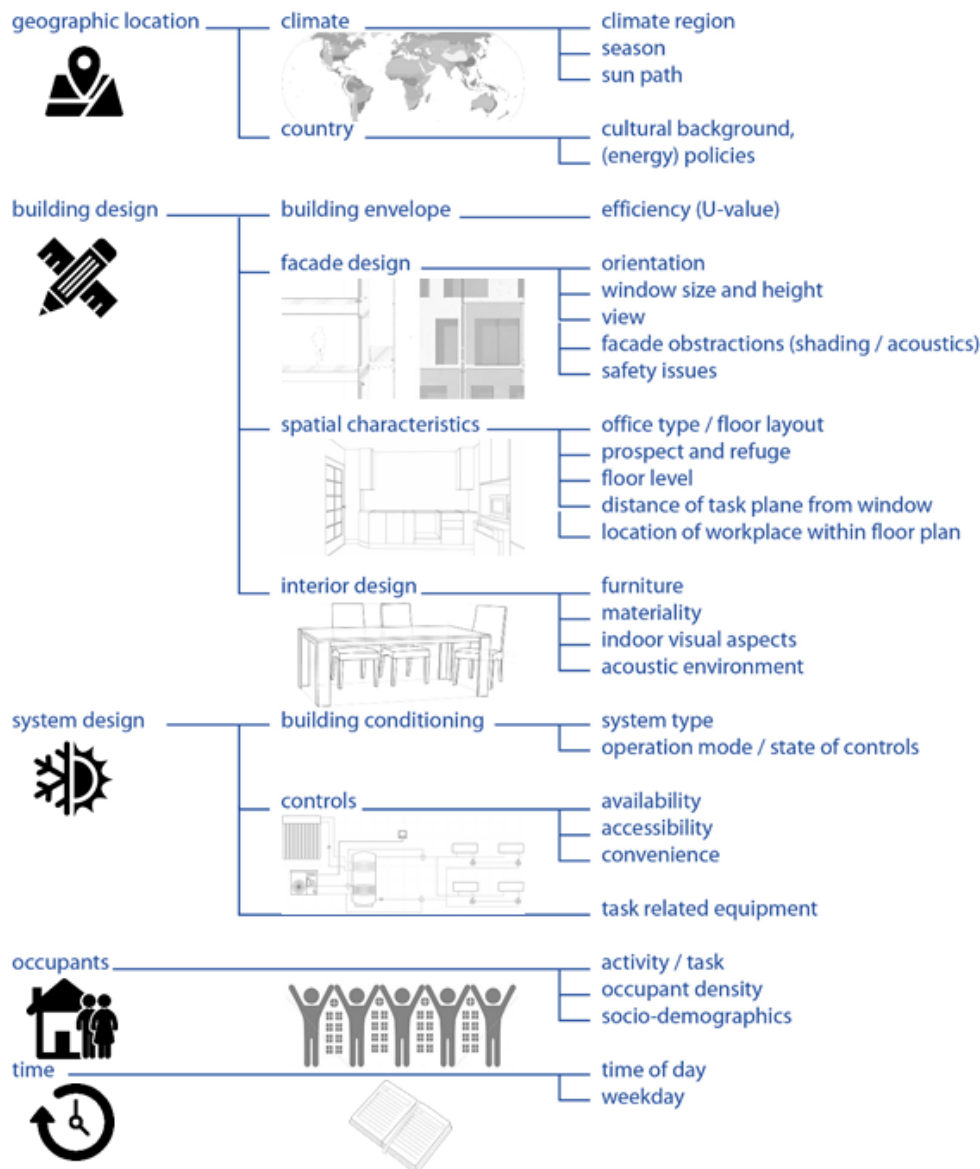

12
 13

Fig. 1. Contextual variables and their categorization.

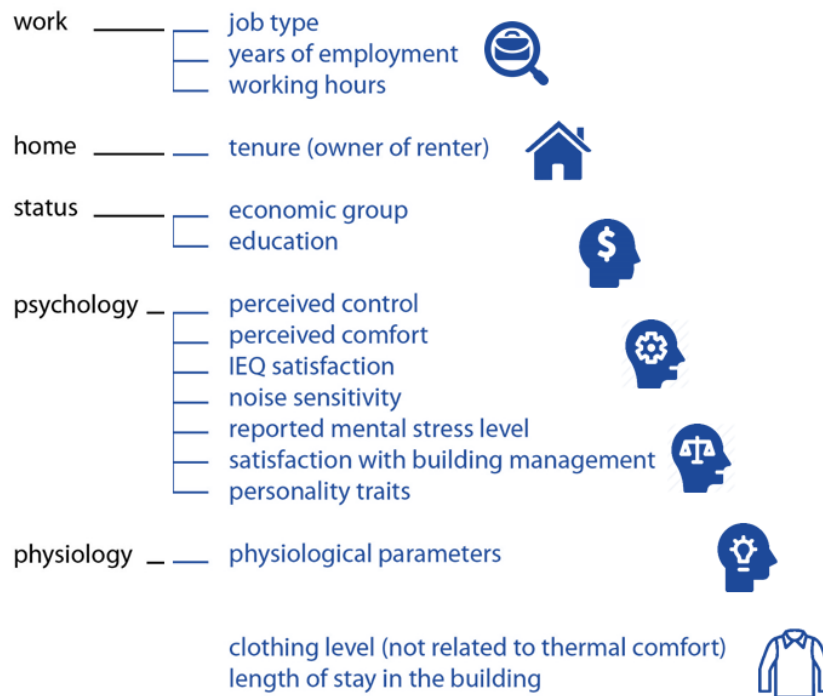

1
 2 *Fig. 2. Personal variables and their categorization.*


3 This brief overview reveals a lack of reviews that considered multi-domain influences on
 4 occupants' perception and behaviour. The current review aims to fill this gap as described
 5 in the following.

6 **1.2 Objective, research questions, and scope**

7 The primary objective is to examine multi-domain approaches with a much broader scope
 8 compared to previous reviews in order to enter into a new phase of conceptual
 9 developments in the field. This review aimed to identify motivations, key methods, findings,
 10 and gaps in the field of multi-domain approaches to human perception and behaviour in
 11 indoor environments.


12 The main research questions were (1) Why did researchers choose the domains and
 13 questions they considered?, (2) How did they approach multi-domain investigations?, (3)
 14 What were the key results?, and (4) What are limitations and gaps of their approaches?

15 The scope of this review covers studies applying a *multi-domain* approach to people's
 16 perception of the indoor environment and their resulting behavioural outcomes. The first
 17 categorization level made is between "perception" and "behaviour", as shown in Figures 3
 18 and 4, respectively. Studies without any physical predictors or with performance or health-
 19 related outcomes are beyond the scope.

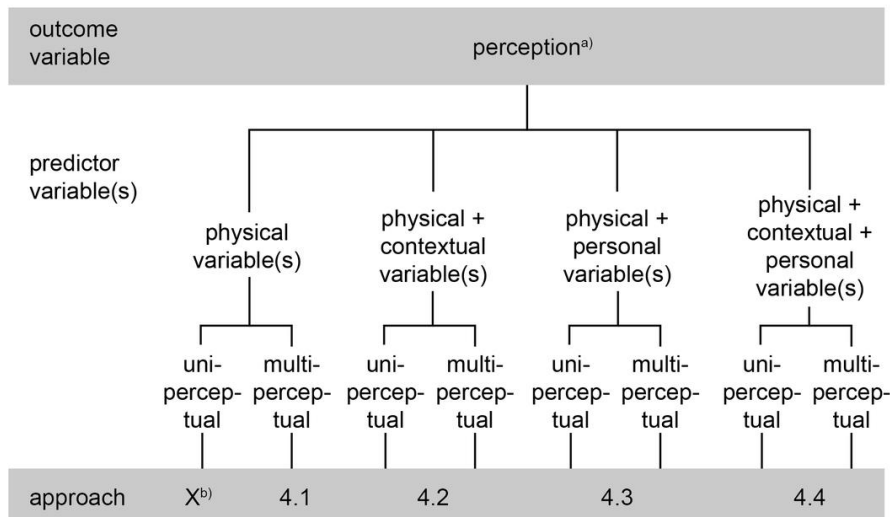

a) overall perception and/or domain specific perception
 b) not considered as multi-variable approach and not included in this review

1
 2 *Fig. 3. Schema of multi-variable approaches with perception as the outcome variable.*

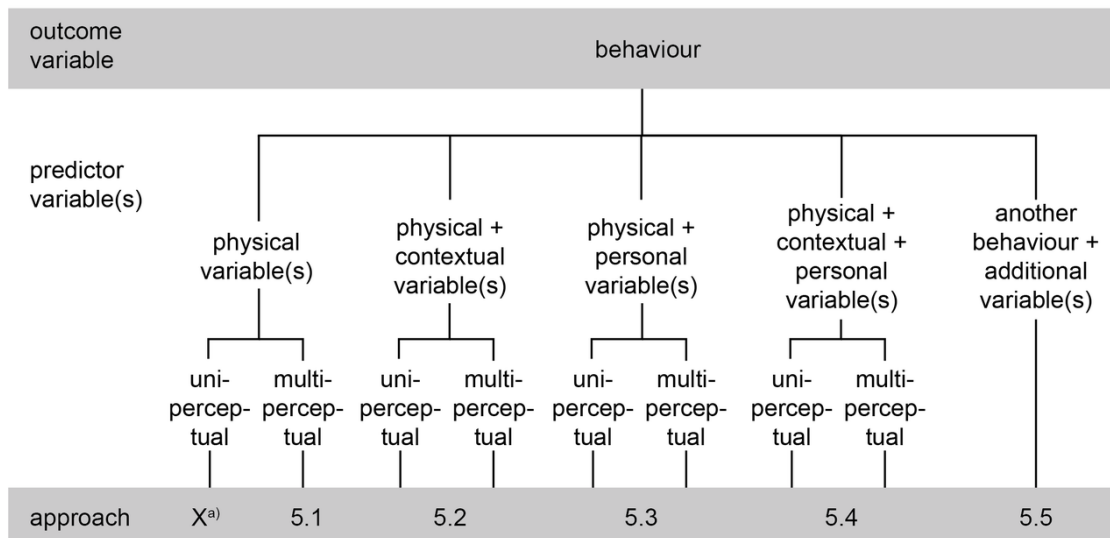

a) not considered as multi-variable approach and not included in this review

3
 4 *Fig. 4. Schema of multi-variable approaches with behaviour as outcome variable. Note that*
 5 *the approach numbers at the bottom of this figure refer to the corresponding subsection*
 6 *numbers within this review.*

7 Physical-perceptual independent variables cover measurable physical properties of the
 8 indoor and outdoor environment, e.g. indoor and outdoor air temperature for the thermal
 9 environment. All the physical properties of the thermal, visual, acoustic, and air quality
 10 environment are considered. *Physical multi-perceptual* approaches are defined as those

1 covering variables from more than one domain of perception (e.g., thermal and visual
2 perception). Studies dealing with multiple variables covering one domain only (e.g., solely
3 air temperature and relative humidity, which are both from the thermal domain, on thermal
4 perception) are not considered unless they included either contextual or personal variables.
5 All *contextual and personal variables* shown in Figure 1 and 2 are considered, except
6 personal variables related to demographic factors (e.g. age, sex), or clothing if dealing with
7 thermal perception.


8 *Other behaviour and additional variables* are included to cover studies that consider the
9 status of one behaviour in the analysis of another behaviour. For example, window opening
10 behaviour as dependent and the status of the heating system as independent variable.

11 This review covers laboratory studies, field studies, and questionnaire surveys. Studies
12 related to perception or behaviour within the outdoor environment, virtual reality studies,
13 or research based on simulations are out of scope. As such, this review provides a
14 comprehensive overview of multi-domain approaches to understanding human perception
15 and occupant behaviour indoors.

16 **2. Methods**

17 This review's approach is visualized in Figure 5. The visualization is based on the "Preferred
18 Reporting Items for Systematic Reviews and Meta-Analyses" (PRISMA) schema [25].
19 However, in contrast to a systematic review, first, we collected and reviewed known
20 research, which returned 153 articles. This initial step included searches in author's
21 individual reference databases as well as in bibliographic search engines (Table 1). Second,
22 the more than 1,000 articles citing these 153 articles or being cited by this initial collection
23 were assessed. Together with their evaluation, we categorize our work as critical review
24 [26].

25

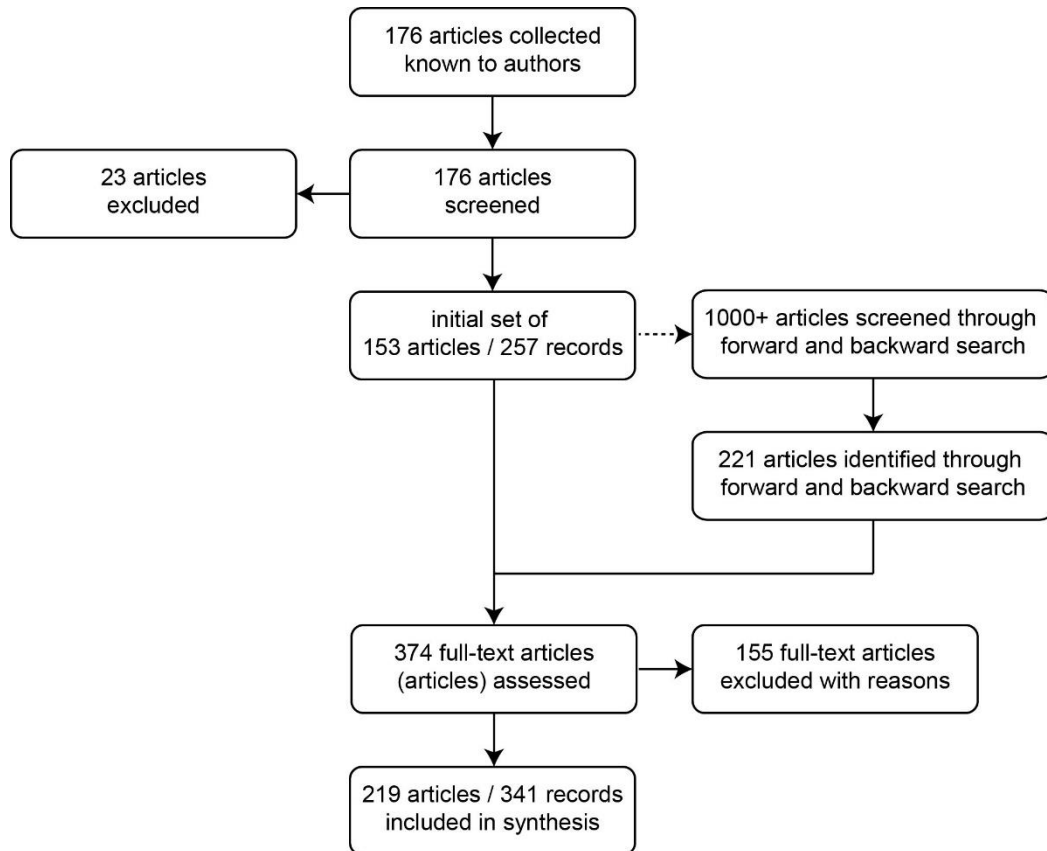

1
2 *Fig. 5. Schema of the review process.*

3 *Table 1. Literature searches performed during the first phase of this review.*

Database/search engine	Search terms (combinations of)
Web of Science	"thermal", "visual", "acoustic", "comfort", "satisfaction", "perception", "behaviour"
Scopus	"thermal", "visual", "acoustic", "personal", "contextual", "multi-domain", "comfort"
Science Direct	"occupant behaviour", "multi-domain", "model", "combined effects"
Google Scholar	"thermal", "visual", "acoustic", "comfort", "satisfaction", "perception", "behaviour"
Google Scholar	"indoor factors", "interaction", "combination"
Google Scholar	"Occupant", "thermal", "comfort", "satisfaction", "visual", "behaviour"
Google scholar	"occupant behaviour", "multi-domain", "model", "combined effects"
Deakin University library (linked to several databases)	"thermal comfort", "visual comfort", "acoustics"

4
5 **2.1 Selection process**

6 The units of analysis were the articles and their records. A record is defined as a dependent
7 variable analysed within an article. As such, one article presenting analysis for two or more
8 dependent variables (e.g. analyses of thermal and visual perception as dependent variable)
9 has an equivalent number of records.

10 The exclusion criteria were: (1) out of scope; (2) other than English language; (3) full text
11 unavailable, and (4) not peer-reviewed. In addition, (5) duplicates such as conference and

1 journal articles presenting the same research were considered once; and (6) review papers
2 without additional analyses such as meta-analysis were not considered.


3 **2.2 Records' structure**

4 The following data were extracted: dependent and independent variables; number (N) of
5 participants, offices, and/or buildings; sex and age distributions; number of votes obtained
6 or length of study; type of study (e.g. field or laboratory); type of building (e.g. residential or
7 office); type of conditioning (e.g. naturally-ventilated (NV) or air-conditioned (AC)); region
8 in which the study was conducted; data collected; statistical approach applied, and key
9 findings.

10 In addition, introduction and discussion sections were scanned for the study's motivation
11 and gaps/future research needs mentioned.


12 **3. Comparison between perceptual and behavioural multi-domain** 13 **approaches**

14 Multi-domain approaches with perception as a dependent variable (244 records/163
15 articles) are three times more frequent than behavioural multi-domain studies (97
16 records/64 articles). Note that eight articles report results from perceptual and behavioural
17 dependent variables (see the complete review
18 table: https://osf.io/gnvp2/?view_only=00b08233881f471795d1d8dee79e9828). The
19 most frequent approach in perceptual and behavioural studies was a combination of one or
20 more physical factors with contextual variables (Figure 6).

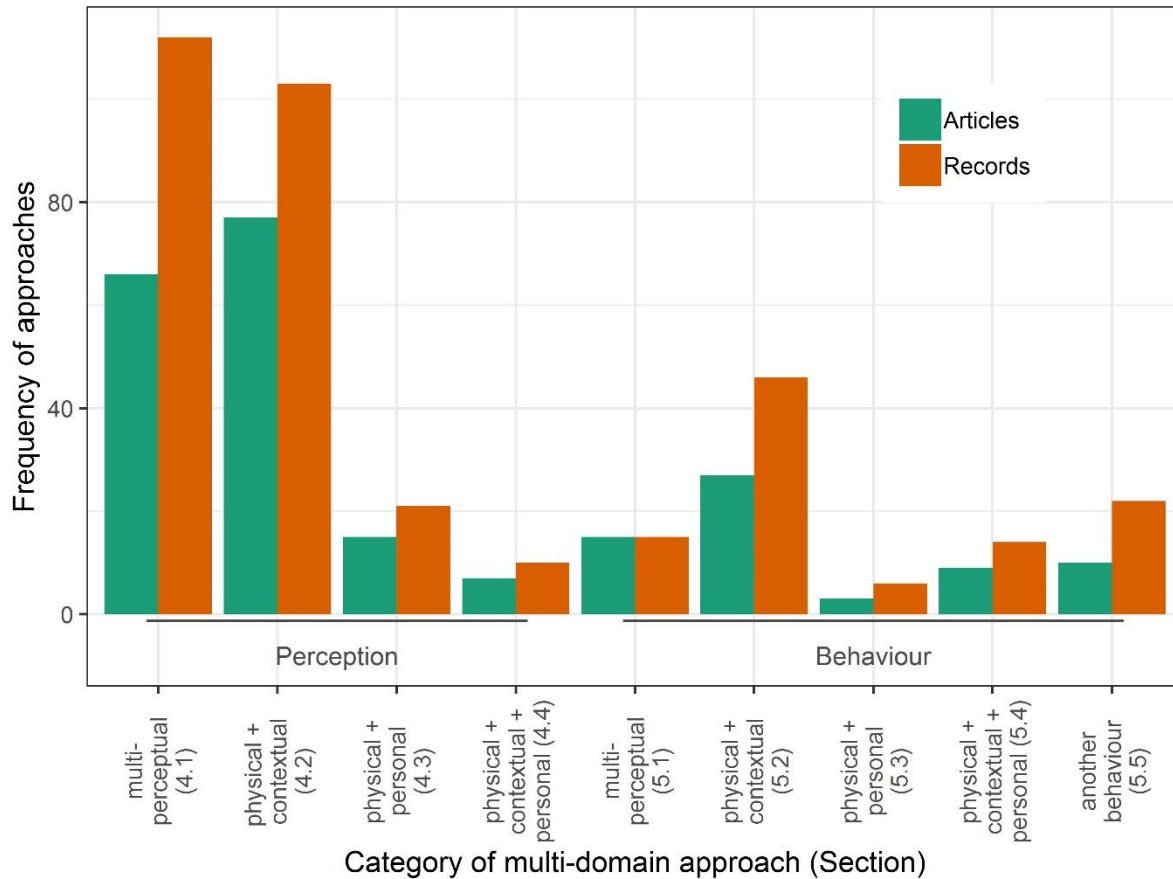

1
2 *Fig. 6. Frequency of studies reviewed per approach.*

3 In both research areas, perception and behaviour, field studies are the most frequent
4 methods used (Figure 7). Laboratory studies only dominate in studies, which examined
5 multi-perceptual effects without contextual or personal variables.

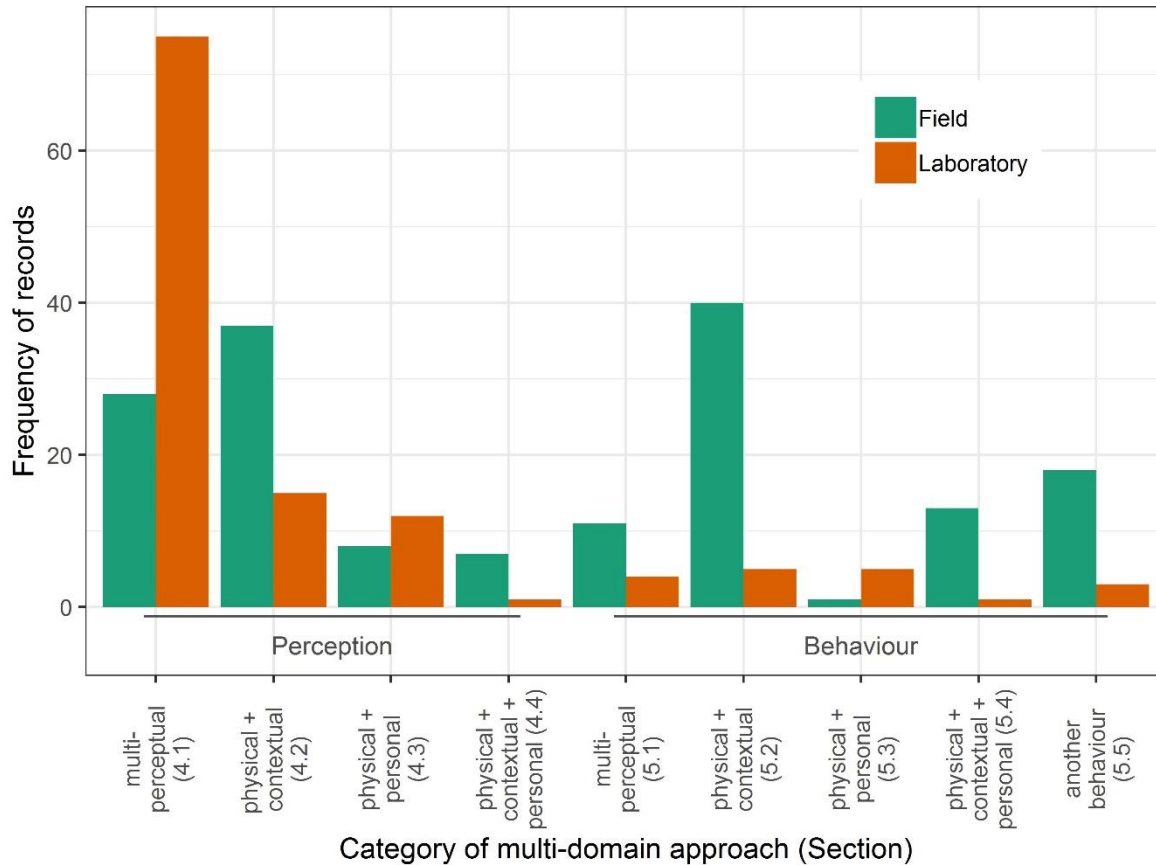

1
2 *Fig. 7. Frequency of records separated by type of study.*

3 The sample size varies according to the type of sample analysed, i.e. whether authors
4 reported buildings, rooms, or participants (Table 2). The number of participants in
5 laboratory studies ranged from 5 to 199 with nearly half of the studies with less than 30
6 (mean 45.6, SD 42.2, median 30). In field studies, the largest number of participants (N=
7 52,980 and N = 29,632) were observed in two studies combining physical and contextual
8 variables (subsection 4.2) using existing databases of online surveys [27; 28] (mean of all
9 field studies 824.1, SD 3178, median 138). Sample sizes below 10 participants were
10 observed in several subsections. Arguments were for example an integral research
11 approach triangulating between four qualitative and quantitative methods [29] or in-depth
12 insights by gathering detailed information through interviews and discussions [30]. The
13 number of buildings varies from 1 [31] to 351 [27].

14 *Table 2. Number of participants, offices, or buildings by category. N = number of records, Min =*
15 *minimum, SD = standard deviation, Med = median, Max = maximum.*

Section	Participants						Rooms/offices						Buildings/households					
	N	Min	Mean	SD	Med	Max	N	Min	Mean	SD	Med	Max	N	Min	Mean	SD	Med	Max
4 Perception																		
4.1 Physical multi-perceptual	109	6	99.3	186.6	35	990	0											
4.2 Physical + contextual	82	7	1525.9	6674.6	168	52980	10	1	6.3	5.3	4	18	34	2	38.6	84.2	114.5	351
4.3 Physical + personal	16	20	557.9	1852.4	93	7500	8	6	56.5	51.9	46	120	6	2	4.3	3.8	2	11
4.4 Phys. + cont. + pers.	9	35	295.4	206.3	400	482	0						1	8	8		8	8

5 Behaviour																		
5.1 Physical multi-perceptual	9	5	42.2	44.8	20	128	4	1	3.5	3.1	2.5	8	4	9	17.8	6.1	19.5	23
5.2 Physical + contextual	11	17	504.9	891.3	36	2787	18	3	83.6	159.2	14	555	20	1	30.5	28.9	16.5	70
5.3 Physical + personal	4	65	65	0	65	65	2	6	63	80.6	63	120	1	2	2		2	2
5.4 Physical + cont. + pers.	6	32	1091.8	905.3	933	2787	2	4	4.5	0.7	4.5	5	4	13	35	14.7	42	43
5.5 Physical + multi-behavioural	11	8	18.5	9.3	21	40	6	3	8.5	3.6	8	14	4	1	1	0	1	1

1 The geographic distribution is presented in Table 3. Studies were predominantly conducted
2 in Central Europe, North America, and Eastern Asia.




3 *Table 3. Geographic distribution of records*

Section	Africa	Asia	Europe	North-America	Oceania	South-America
4 Perception						
4.1 Physical multi-perceptual	1	44	38	9	0	0
4.2 Physical + contextual variables	0	22	34	28	2	1
4.3 Physical + personal variables	0	3	10	6	0	0
4.4 Physical + contextual + personal variables	0	2	2	0	1	0
5 Behaviour						
5.1 Physical multi-perceptual	0	8	1	2	0	0
5.2 Physical + contextual	0	3	13	3	0	0
5.3 Physical + personal	0	0	5	1	0	0
5.4 Physical + contextual + personal	0	3	2	0	2	0
5.5 Physical + multi-behavioural	0	0	16	2	1	0

4 4. Perceptual studies

5 This section is divided into four subsections: physical; physical and contextual; physical and
6 personal; and physical, personal, and contextual. In each subsection, we reflect on the
7 motivational background, the methods employed for data collection and analysis, and some
8 of the key findings. We conclude each subsection with thoughts on the current state of the
9 art, prevailing knowledge gaps, and future research needs.

10 Figure 8 summarises the findings on crossed main effects on thermal, visual, IAQ, and
11 acoustic perception referred to in the following.

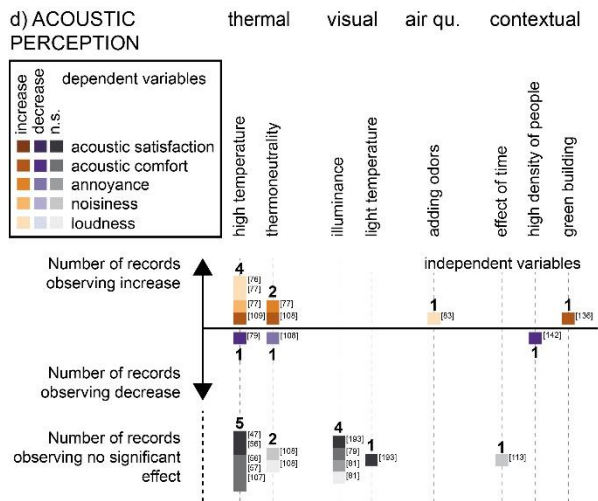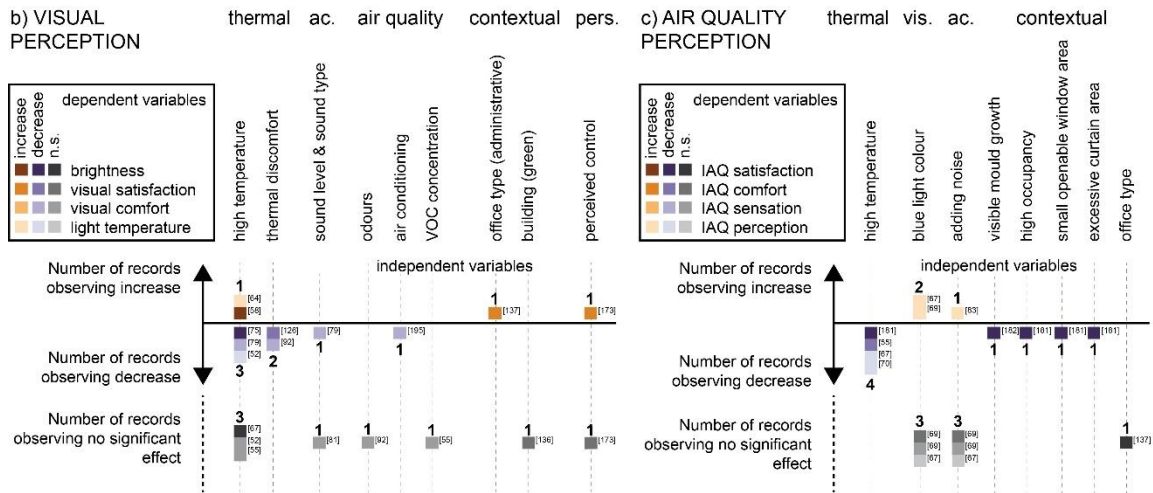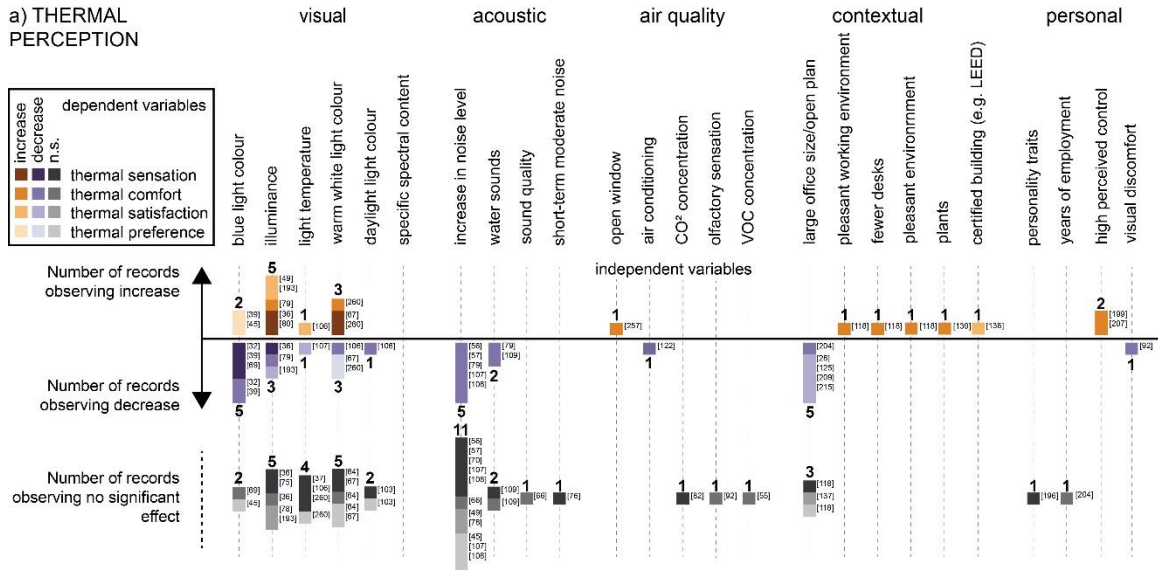

1
2 *Fig. 8. Overview of crossed main effects related to thermal, visual, air quality and acoustic*
3 *perception based on studies including significance tests.*

1 **4.1. Physical multi-perceptual approaches**

2 A considerable number of studies addressed the effects of multiple environmental factors
3 on occupant perception. While not all these studies specifically address the combined
4 effects of multiple indoor environmental variables, most acknowledge at least their
5 concurrent presence [32-109]. In the following, we focus on a number of these papers and
6 their contributions, directly relevant to the topic of multi-domain exposures.

7 **4.1.1 Motivational background**

8 The majority of the studies cite the need for better understanding of exposure situations
9 involving multiple indoor environmental variables. Other studies observed effects of
10 multiple environmental variables without a specific intent to examine their
11 interactions [53; 62]. Studies considered different combinations of environmental variables,
12 most frequently thermal and visual [34; 37-39; 52; 67; 102-104]. A few studies investigated
13 other combinations of variables, such as visual and acoustic [45], thermal and acoustic [56;
14 57; 66], visual and IAQ [59], acoustic and IAQ [83], visual, thermal, and acoustic [48; 49; 62;
15 70], as well as IAQ, thermal, and acoustic [35; 41]. Researchers were mostly interested in
16 the effect on dependent variables such as occupants' comfort, sensation, and
17 preference [34; 39; 48; 52; 66; 102-104]; and satisfaction [59; 68].

18 **4.1.2 Approaches**

19 The majority of papers involved short-term laboratory studies in office settings. Only in a
20 few studies, participants were given the opportunity to adjust certain factors of their
21 immediate surroundings [45; 59] or exercise a choice upon experiencing different
22 settings [40].

23 Experimental settings typically involved different properties of the physical environments
24 such as air temperature (thermal environment), sound type and level (acoustic
25 environment), illumination level, glare intensity, light colour (visual environment), and
26 airflow rates (thermal and air quality environment). Laboratory studies typically lasted a
27 few hours or up to a day. Typically, experiments tested one or more levels of a physical
28 variable crossed with one or more levels of another physical variable (e.g., three levels of
29 temperature crossed with two levels of illumination, as in Kulve et al. [104]), while holding
30 other indoor environmental variables constant.

31 The majority of experiments had within-subject designs, that is, all participants experienced
32 all experimental conditions, typically counterbalanced by randomising the order of
33 conditions. Within-subject experiments are more sensitive to the manipulation of
34 independent variables, which is important for studies with smaller sample sizes.

35 The occupancy-related implications of environmental factors were queried using
36 techniques such as surveys and questionnaires (e.g., [48]), comfort and sensation scales
37 (e.g., [66]), and visual observations (e.g., [70]).

38 As expected, data analysis involve various well-established formats and techniques from
39 descriptive and inferential statistics. The collection of statistical methods commonly
40 referred to as ANOVA (Analysis of Variance) is frequently deployed for processing and

1 interpretation of measurement results [40; 45; 52; 66; 68; 70], as are mixed-effects
2 models [37; 39; 49; 67; 104].

3 In the majority of the less frequent field studies, the setting was a university classroom and
4 participants were students. However, field studies were also conducted in office, hospital
5 (e.g., [34]), and residential settings [50]. Field studies typically lasted several months.

6 Environmental physical conditions were monitored and participants were asked to rate
7 their perceptions through questionnaires on comfort, sensation and satisfaction (e.g., [53;
8 105]). Measurements of environmental conditions were associated with participants'
9 subjective ratings, and the subjective ratings with each other, using measures such as
10 correlation [105] or ANOVA [106]. Field studies enabled the variation of environmental
11 conditions for large samples of subjects (e.g., 331 students in 7 varied classrooms [105]).

12 **4.1.3 Findings**

13 Studies described in the reviewed papers entail a host of valuable findings (Figure 8). Tiller
14 et al. [66] reported a slight effect of acoustical conditions on subjective ratings of thermal
15 comfort, but no reverse effect. Nagano and Horikoshi [56] concluded that operative
16 temperature has a slight effect on auditory comfort sensation votes and thus that the
17 thermal environment must be taken into consideration in acoustical studies. On the other
18 hand, they did not observe any effect of noise on reported thermal sensation. On the
19 contrary, Pellerin et al. [107] indicated a noise effect on thermal comfort in warm
20 conditions, but not of temperature on acoustic sensation, comfort, and preference. Yang et
21 al. [108; 109] reported that thermal comfort decreased with increased noise level, and with
22 the noise of a fan as compared to that of babble, and that water sounds increased cold
23 sensation and decreased thermal comfort. The authors also observed the influence of the
24 thermal environment on acoustic comfort and sensation, but with contrasting findings, as
25 they report a decrease of annoyance and an increase of acoustic comfort at
26 thermoneutrality [108] as well as an increase in acoustic perception and annoyance at
27 thermoneutrality [77; 109].

28 Nakamura et al. [58] reported that higher colour temperature is preferred in summer and
29 vice versa in winter. Fanger et al. [45] observed slight lighting effects on thermal comfort:
30 people preferred a slightly lower temperature under red light than under blue light. Similar
31 results were reported by Albers et al. [32] and by Winzen et al. [69], with electric light
32 colour affecting thermal sensation, comfort and temperature estimation. Chinazzo et al. [39]
33 suggested that participants' thermal sensation reports were influenced by the colour of the
34 daylight. For instance, as compared to orange daylight exposure, a colder thermal sensation
35 was reported in the case of blue daylight, even though the measured temperature remained
36 the same. Daylight quantity was also reported to affect thermal perception, with increased
37 thermal comfort under dim daylight conditions in a warm environment and under bright
38 daylight conditions in a cold environment [103]. However, the authors indicate no effect of
39 daylight illuminance levels on thermal sensation [103], similarly to what was reported by
40 an earlier study with electric lighting [75]. Meanwhile, Azmoon et al. [34] observed
41 improved thermal comfort responses because of increased light intensity.

1 Unexpected effects were sometimes found on variables that were not the focus of the
2 experimental study. For example, people reported IAQ differences across temperature
3 settings [67], or across combinations of acoustic, lighting, and temperature settings [49]. In
4 some cases, papers noted significant effects only under restricted conditions. For example,
5 Geng et al. [47] observed that people were less satisfied with IAQ and lighting under certain
6 temperature settings, but not others. In some cases, papers noted statistically non-
7 significant interactions between environmental conditions. For example, Pan et al. [83]
8 observed that adding noise to odour mitigated the effect of odour on air-quality-related
9 measures. However, with a sample sizes of $N = 9$, small interaction effects are unlikely
10 detected.

11 Many studies observed no interactions between environmental factors tested (e.g., [37;
12 38]), or were not designed in a way to investigate these interactions (field studies).

13 **4.1.4 Identified gaps and future directions**

14 The review of multi-physical perceptual research shows the extent of valuable knowledge
15 generated over the past five decades. However, the yield is less extensive and less
16 conclusive if we specifically query for frequent, clear, and consistent instances of cross-
17 modal influence. The results are in many instances inconclusive, and in certain cases even
18 contradictory. It is thus of paramount importance to reflect upon some of the key
19 shortcomings and limitations of past research, which correspond more or less directly to
20 requirements for future research efforts.

21 Given the difficulties of conducting research including real occupants in realistic settings
22 (involving, amongst others practical, ethical, and economic issues), it is not surprising that
23 most studies are short-term. Moreover, the participants, often young students, are not
24 necessarily representative of pertinent populations, for instance, of office workers. Most
25 studies were conducted in offices, yet other building typologies such as residential
26 buildings are practically ignored by the literature.

27 Researchers frequently try to establish some measure of realism in the experimental
28 settings, but this is rarely effectual given the difficulty in concealing the inherent artificiality
29 of the available testing facilities. As such, the reviewed studies do not truly succeed in
30 addressing the implications of the Hawthorne effect, even though, scholars argue about its
31 nature and suitable methods to account for it in research [110; 111].

32 Studies often start with some reference to previous research (frequently to authors' own
33 previous publications), but there is very little evidence of actual carryover of past studies'
34 findings. As such, the majority of the studies appear to practically start from scratch.
35 Perhaps consequently, different studies do not deploy standard research designs, data
36 collection strategies, metrics, and statistical analysis techniques, making attempts toward
37 conducting meta-analyses factually futile.

38 There is arguably a paucity of collaborative, multi-institutional, international, and
39 interdisciplinary experimental studies. Specifically, few studies seem to have truly
40 recognized the critical importance of conceptual and methodological integration of
41 engineering and human science methods.

1 One fundamental problem with most research efforts is the absence of foundational
2 theories that would facilitate the processes of hypothesis formulation and testing. This may
3 be of course in part due to the inherent complexity of the subject. However, the chances of
4 obtaining scalable and generalizable results remain slim if research designs do not at least
5 make an attempt to start from a provisional general theory of the nature of the perceptual
6 and behavioural processes involved in multi-domain exposure situations.

7 **4.2. Physical + contextual variables**

8 This subsection examines studies investigating the combined effects of physical and
9 contextual variables on environmental perception. These studies examined how context
10 may interplay with single- or multi-sensory domain perceptions by imposing unknown or
11 indirect influences on the physical properties of the environment or by shaping the users'
12 perceptions and expectations in line with social or cultural experiences [27-29; 42; 112-
13 192].

14 **4.2.1 Motivational background**

15 The drive for research varies greatly between the studies identified. Some researchers
16 challenge the absence of an established single index for holistic comfort [124; 129; 167]. In
17 other studies, the combined effects of physical and contextual variables were merely
18 incidental rather than an intended outcome [124].

19 In four of the identified studies, the inclusion of contextual factors was thought to enrich
20 environmental evaluation by factoring subjectivity into assessments typically based on only
21 physical criteria [112; 114; 132; 149]. Similarly, some research aimed to improve post-
22 occupancy evaluation techniques, from how data is collected or analysed [72; 168], to
23 examine the combined influence of suspected co-contributors to satisfaction in a single-
24 sensory domain [169].

25 We identified three distinct research themes focusing on specific building attributes. One
26 addressed the concurrent influence of environmental and spatial factors present in open-
27 plan office space configurations [42; 113; 137; 142; 170], a second examined limitations of
28 green building design and rating systems [125; 127; 136; 171], and a third concerned the
29 impact of the presence of control opportunities [115; 116; 172; 173].

30 **4.2.2 Approaches**

31 In contrast to the studies reviewed in section 4.1, the interest seems to be more in real
32 settings, shown by the majority of studies applying field study approaches. Here, the
33 influences of the contextual factors can be examined with limited cost and reduced
34 difficulty in the experimental set-up.

35 Subjective evaluation through surveys is a common approach for data collection of comfort
36 or satisfaction based on the self-reporting of participants [27; 28; 174]. Several studies
37 involve measurements of indoor environmental quality metrics related to thermal, acoustic,
38 and visual properties alongside with occupants' subjective votes [42; 74; 124; 129; 136;
39 137; 142; 144; 145; 169; 170; 175-177].

1 The most frequent building typologies were office buildings (e.g. [115; 119; 126; 134; 140;
2 143; 147; 178-180]) and educational buildings (e.g. [116; 120; 123; 181-183]), followed by
3 residential buildings [122; 153; 175], hostels and student residences [42; 121], restaurants
4 and cafés [132; 142], factories [118; 184], a healthcare facility [150], a shopping mall [141]
5 and airport terminal [47].

6 The length of data collection differed depending on the methodology and the research
7 focus. Longitudinal studies ranged from months to years [171; 185]. Studies employing
8 structured or semi-structured interviews may span over several seasons [141; 186; 187].
9 Short survey or interview studies last usually no more than two months [148; 150; 153],
10 but can be as short as a few days [124; 125; 140; 143; 174; 181; 188].

11 The most common approach used in almost all studies are summary statistics, including
12 mean and variance. In addition, several types of correlational analysis, parametric and non-
13 parametric tests are common approaches.

14 Overall perception was the most frequently researched dependent variable, followed
15 closely by thermal perception and then by visual perception, acoustics, and IAQ. Metrics for
16 overall perception ranged from mainstream choices such as overall satisfaction,
17 acceptability or comfort (and even ‘uncomfortableness’) to measures of ‘psychic well-
18 being”, preference for space and affective quality of space. The metrics used for thermal,
19 visual, acoustic, and IAQ perceptions were more conventional, with higher variance for the
20 visual domain, including satisfaction with lighting, glare perception, eye discomfort and
21 appearance of the environment.

22 **4.2.3 Findings**

23 The influence of geographic location is not conclusive. With similar climate conditions,
24 occupant responses to warm and cold weather tend not to differ greatly across
25 countries [28]. Similarly, Sakellaris et al. [157] found minimal differences in multiple types
26 of perception between two locations. In contrast, thermal and IAQ perception differed
27 between occupants of the same country, especially for those countries with a large north-
28 south spread [98].

29 The interior design and furniture in office and school settings correlated strongly with
30 comfort [135; 133; 143; 151; 157]. Perception of illuminance level strongly depended on
31 office layout and furniture type [123; 183; 189]. Furthermore, since daylight levels exhibit
32 strong spatial dependence, visual comfort at workplaces varied greatly with proximity to
33 the window [27; 151].

34 The perceptual aspects of visibility in classrooms [183; 189], privacy in offices [27; 151],
35 and available space in offices [27] are additional factors associated with room layout and
36 furniture selection, which correlated with visual and overall comfort levels. Few studies
37 recommend optimal office layout or furniture selection for comfort. This is likely due to the
38 subjective and non-quantifiable nature of these properties.

39 One of the most important components of the building envelope is the window [190]. Poor
40 thermal comfort (e.g., cold or warm window) [175; 191], daylight glare [191], and poor
41 acoustic comfort [191] are reported by participants in large-windowed residential or office

1 buildings. Additionally, the design of solar control devices and solar control techniques can
2 affect occupant comfort, especially thermal and visual. For instance, Karlsen et al. [192]
3 demonstrate that occupants prefer venetian blinds with adjustable slat angles to those with
4 only on-off position. These handful of studies are among the few that made conclusions
5 from surveys, while the majority of other studies use simulation approaches beyond the
6 scope of this review.

7 Perception and comfort in green buildings vs. conventional buildings varied greatly among
8 studies. Two studies demonstrated that occupants' overall comfort is higher for green
9 buildings [127; 144]. In contrast, Gou et al. [128] observed no significant difference in
10 overall comfort between these building types. The contrasting results may be due to two
11 reasons. First, the overall comfort can be influenced by occupants' attitude towards the
12 "green" identity of the building [171]. Second, the term "green" building is not universally
13 defined, and used for buildings that are certified by different standards (e.g. LEED [144],
14 LEED and GBL [128], BREEAM [171]). These standards differ significantly in their
15 assessment criteria. Consequently, the building performance can vary largely.

16 NV and passively cooled buildings that allow occupants to control aspects of the indoor
17 environment, excited positive thermal comfort perceptions outside the fixed temperature
18 limits set in standards [120; 130; 148; 180]. Moreover, controllability strongly increases
19 occupants' satisfaction with thermal indoor conditions in winter and summer [28; 120;
20 130; 148].

21 **4.2.4 Identified gaps and future directions**

22 The contextual variables discussed in this paper are those mentioned in the literature.
23 Further research would be needed to evaluate whether the most researched dependent and
24 independent variables are the most influential.

25 Among the building related parameters, façade design and interior design are crucial. Few
26 studies use a surveying approach to evaluate façade design options. Thus, further field
27 surveys are needed to associate occupant multi-domain perception with design decisions.
28 Simulations alone cannot substantiate the claims, as they may not truly reflect the actual
29 indoor environment. Spatial information is merely described in the text. For future studies,
30 publishing this information in a visual format is desirable, e.g., with photos and
31 architectural drawings such as floor plans, sections, or elevations, which can convey the
32 spatial situation better. Examples of appropriately published spatial architectural
33 information exist [29; 125; 142]. In general, further research on spatial characteristics
34 would be desirable, because spatial characteristics and typologies also depend on building
35 types and the number of studies considering each building type is currently small.

36 In most studies, the context was represented by one or a few variables. However, context is
37 a complex system of multiple dynamically interacting variables. For example, visual
38 perception varies with the location of a workplace within a floor plan [169], but the
39 occupants' perception is further influenced by other spatial parameters such as orientation
40 and fenestration of the façade [175], climate related parameters such as season, sun
41 path/latitude [126], and indoor surface materials [114]. Our review identified no study,
42 which investigated the complexity and interplay of multiple contextual variables, which is

1 likely due to methodological challenges with required data types and the needed quantity of
2 data. New methodological approaches might be needed for future studies to describe and
3 understand the complexity and interplay of contextual variables.

4 Most papers used statistics for data analysis, and these methodologies tend to require large
5 sample sizes for higher validity. If context is evaluated at a high level of resolution, i.e. with
6 in-depth analysis of the spatial geometric or architectural design characteristics, it is
7 unlikely that large sample sizes exposed to identical characteristics can be obtained for all
8 building types. Therefore, a broader variety of approaches and methodologies could expand
9 the investigated contexts.

10 **4.3. Physical + personal variables**

11 This subsection concerns thirteen studies that combine the impact and mutual influence of
12 measured indoor environmental conditions and personal variables on occupants'
13 perception [52; 168; 193-203].

14 **4.3.1 Motivational background**

15 In some studies, the analysis of personal variables is tangential and brief, while in other
16 studies, the main purpose and motivation is to understand how personal variables
17 influence occupants' perception. The analysis of personal variables is important to
18 understand the differences in perception observed among individuals or groups in similar
19 environmental conditions [196]. Nevertheless, all experimental studies aimed to
20 evaluate the possible correlation between personal variables and the different domains of
21 environmental perception.

22 **4.3.2 Approaches**

23 Studies include one or more dependent variables related to thermal, visual, acoustic, IAQ, or
24 overall perception. Other studies considered productivity as a dependent variable together
25 with comfort perception [202], which is out of the scope here.

26 Almost all studies were conducted in office or educational buildings or in controlled
27 chambers that simulate a working environment. Only one study was found concerning a
28 non-office commercial building, a shopping centre [193].

29 Field studies including physical measurements and questionnaires dominate in this
30 subsection. For a higher control and a broader collection of the physical variables, some
31 studies used laboratories that reproduce commercial [193], educational [52; 197], or office
32 environments [194; 196; 198]. One study is based on questionnaires [168]. Yun [199],
33 instead, applied a mixed methodology to evaluate the energy implications of personal
34 variables, specifically of perceived control.

35 The applied statistical analysis methods largely vary among the studies, ranging from
36 ANOVA and MANOVA [197; 198; 203] to regression [196], correlation analysis [52; 168;
37 193; 194], and non-parametric analysis [195].

1 **4.3.3 Findings**

2 Overall, findings showed that personal variables significantly influence multi-domain
3 comfort perception positively or negatively.

4 Occupants' perceived control and satisfaction with building management are among the key
5 analysed personal variables significantly interacting with the overall perception. Robertson
6 et al. [195] highlighted that workers' visual comfort and personal wellbeing are influenced
7 by perceived control over lighting, especially in non-naturally ventilated buildings.
8 Additionally, occupants' reduced perceived control over the indoor environment has a
9 significant negative effect on their thermal comfort [199] and general perception of a
10 building [168]. On the contrary, the availability of choice over lighting control were
11 demonstrated to decrease occupants' perceived importance of lighting in offices [198] and
12 their performance [197]. Focusing on the interaction of thermal, acoustic, and visual
13 domains, Dang et al. [193] showed that, although thermal and acoustic personal satisfaction
14 are not directly correlated with lighting parameters, they interact with personal lighting
15 satisfaction. On the other hand, a significant effect of thermal variables and clothing level on
16 visual perception was obtained only in artificially illuminated buildings, since in daylight
17 the influence of other parameters, e.g. acoustics, becomes relevant [52]. Finally, Schweiker
18 at al. [196] demonstrated that personality traits, i.e. neuroticism, extraversion, openness to
19 new experiences, are moderating thermal perception. Focusing on physiological
20 parameters, Pigliatile et al. [194] highlighted that a multi-domain approach is required to
21 understand human comfort thoroughly.

22 **4.3.4 Identified gaps and future directions**

23 Generally, very few studies were identified that deal with the interaction of multi-domain
24 perception and personal variables beyond demographics. Moreover, many of these studies
25 concern the impact of perceived control on environmental conditions and less focus is given
26 to other personal variables. In addition, many studies simply report the differences
27 observed among occupants with different personal variables without attempting to
28 understand its motivation, which limits their contribution to the factual understanding of
29 the influence of personal variables. Another important gap is the small sample size and the
30 lack of diversity of the samples. Although gender balance is generally fulfilled, many of the
31 studies selected university students for their experiments. Finally, none of the reviewed
32 papers include a study focused on residential environments. While certain personal
33 variables, such as perceived control and privacy, might be less significant in residential
34 spaces compared to office buildings, other variables, such as the expectation of building
35 performance and energy/money saving might be significant, and thus worthy of
36 exploration.

37 **4.4. *Physical + contextual + personal variables***

38 While some of the studies discussed in the previous subsections explored physical,
39 contextual, and personal predictors of perceptions, none aimed to understand the
40 interactions of these independent variables. The current subsection covers eleven research

1 efforts that addressed this gap by simultaneously examining at least one predictor variable
2 from each category [30; 72; 125; 204-211].

3 **4.4.1 Motivational background**

4 All studies promote a multi-domain approach to perceptual evaluation. For instance, Jin et
5 al. [211] highlight the need to study physical (i.e., objective) and non-physical (i.e.,
6 subjective) drivers of occupants' perceptions with their indoor environment. Pivac et
7 al. [204] state the importance of physiological and social factors in the evaluation of
8 perceptions. Indraganti et al. [209] focus on the role of occupants' demographic and
9 personal characteristics while assessing thermal comfort. Hitchings et al. [30] highlight the
10 need to study cultural, geographic, and seasonal adaptation effects. Other studies aimed to
11 understand overall environmental satisfaction levels [72; 125]. Overall, a unified and
12 explicit goal of proving that physical, contextual, and personal variables combine to explain
13 perceptions is lacking.

14 **4.4.2 Approaches**

15 Ten of the reviewed articles are field studies conducted in non-controlled building
16 environments, while one [206] took place in a laboratory controlled office setting. The
17 studied environments were office [125; 204-208], residential [30; 72; 209; 210], and retail
18 buildings [211]. Dependent variables considered included domain-specific comfort metrics
19 such as thermal comfort [30; 204; 209], neutral temperature [206], visual comfort [211;
20 205], and acoustic comfort [210]. Two studies [72; 125] considered domain-specific
21 comfort metrics and overall perceived comfort levels of the respondents.

22 Data collection was carried out through environmental sensing devices, questionnaires,
23 walkthroughs, inspections, interviews, and diaries. The data collection duration varies from
24 one-time surveys (e.g., [210]) to data collected over an extended period of time (e.g., 40
25 days in Sadeghi et al. [205]).

26 The data analysis approaches include qualitative and quantitative assessments. Starting
27 with the former, Hitchings et al. [30] used a qualitative analysis of the collected data. The
28 other studies mostly applied statistical analysis methods to derive relationships between,
29 on the one hand, the environmental, contextual, and personal data that were collected, and
30 on the other, the respondents' perceptions of comfort. The statistical methods include
31 ANOVA [125; 210], X^2 -tests [72], Mann-Whitney U-test and the Kruskal-Wallis
32 test [204], correlations [72; 205; 210; 211], and linear regression [205; 206; 209-211; 125].

33 **4.4.3 Findings**

34 While this subsection covers a broader scope of predictor categories than previous sections,
35 the results are not more diverse. The results do not explicitly confirm that physical,
36 contextual, and personal predictors collectively drive the reported perceptions. The
37 findings of the articles are mostly identifying single or dual types of interacting perception
38 drivers, which is in line with the observations of previous subsections.

1 Starting with thermal perception, Pivac et al. [204] found that environmental metrics, office
2 type, and job type have a significant influence on the perceived thermal comfort. Indraganti
3 and Rao [209] observed a strong correlation between the respondents' economic group and
4 their reported comfort levels, and weaker relationship with the other considered variables
5 such as season and tenure. Schweiker and Wagner [206], on the other hand, highlight a
6 significant influence of perceived control on neutral temperature, while office type affected
7 perceived control.

8 Related to visual perception, Jin et al. [211] found that the measured illuminance level is the
9 dominant driver of visual comfort, while the existence of daylighting plays an essential role
10 in subjective satisfaction. Sadeghi et al. [205] found a strong relationship between the
11 occupants' perception of control and their acceptability of a broader range of visual
12 conditions.

13 In Park et al. [210], the authors studied potential drivers of subjective responses to floor
14 impact noise in residential buildings. They highlight a significant impact of noise sensitivity
15 and floor slab thickness on the reported acoustic comfort levels.

16 The main observation by Xue et al. [72] and Freihoefer et al. [125] is a significant difference
17 in the reported overall comfort levels between workspace types (open and closed). Xue et
18 al. [72] found that the combined effect of thermal comfort and IAQ significantly influences
19 visual comfort, while the abundance of daylight hours and illuminance levels showed strong
20 positive correlations with reported visual perceptions. More interestingly, the authors
21 confirm strong dependencies between pairs of variables such as IAQ/thermal comfort and
22 room orientation, adaptive behaviours of shading/lighting and visual comfort, and finally,
23 mental stress and acoustic comfort.

24 **4.4.4 Identified gaps and future directions**


25 The findings presented above do not provide a clear understanding of the interactions nor
26 fundamentals of the combined effect of physical, contextual, and personal predictors of
27 perception. The findings cannot be generalized given the small sample of studies that met
28 the criterion used for inclusion in this subsection. Furthermore, the data analysis methods
29 applied were mostly constraint to studying relationships between a limited number of
30 variables (in many cases two variables), falling short of providing a comprehensive
31 understanding of the influence of multi-variable predictors and their interactions. More
32 extensive diversity of predictors and complexity of analysis tools (e.g., Principal Component
33 Analysis and Artificial Neural Networks) can be considered in future research to draw more
34 diverse and comprehensive conclusions on the drivers of occupant perceptions. Finally,
35 except for Schweiker and Wagner [206], none of the studies were conducted in controlled
36 environments, which is another potential avenue for exploring multi-domain predictors of
37 perception.

38 **5. Behaviour**

39 This section summarizes studies considering the relationship between measurable
40 conditions of indoor environmental quality and occupant behaviour.

1 Figures 9 to 12 show the crossed main effects of multiple independent variables on different
 2 types of behaviour, which will be discussed in the following subsections.


3

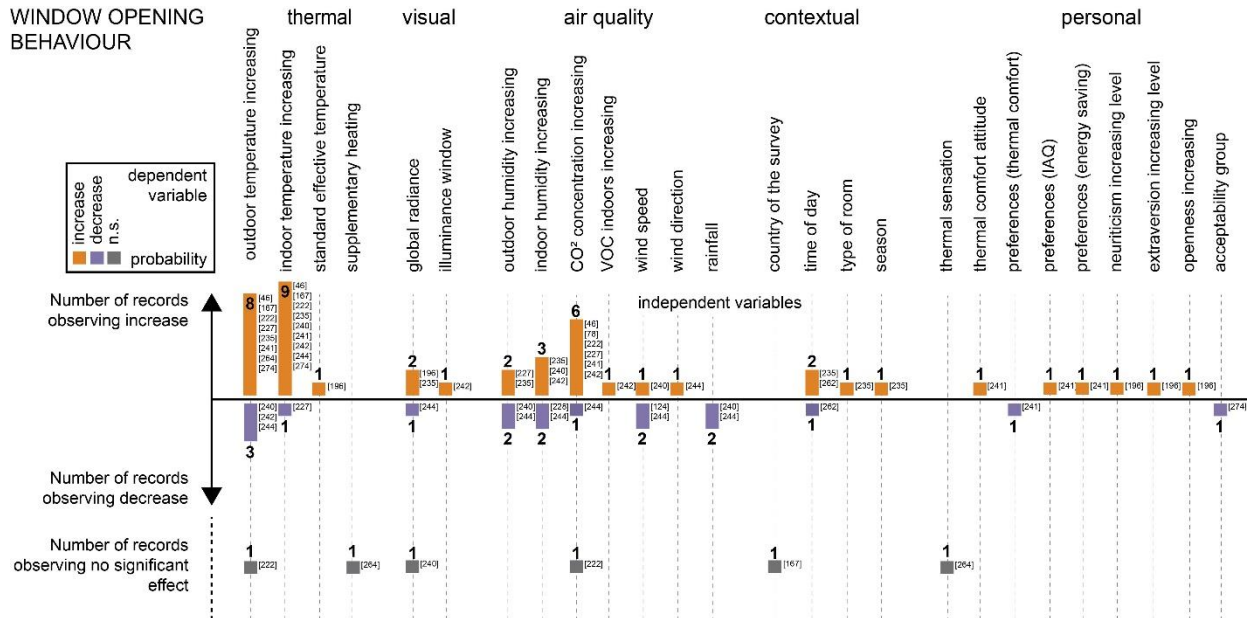

4
 5


Fig. 9. Effects of physical, contextual and personal variables on window opening behaviour

THERMAL BEHAVIOUR

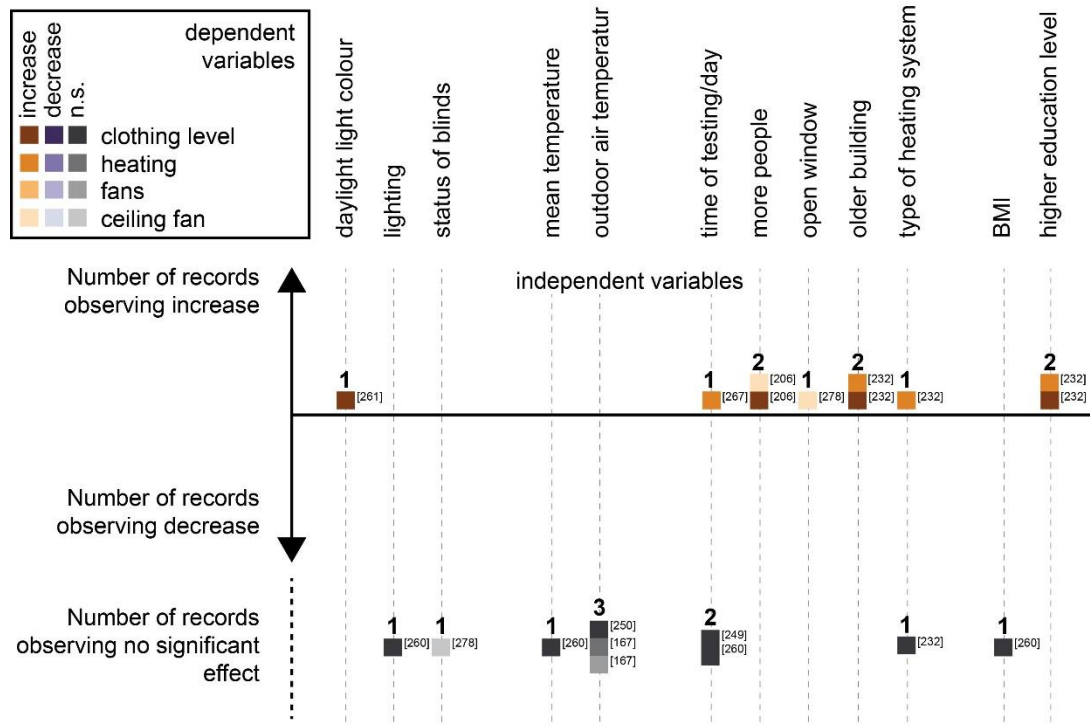


1
2 Fig. 10. Effects of physical, contextual and personal variables on different types of thermal
3 behaviours.

LIGHT SWITCH ON BEHAVIOUR

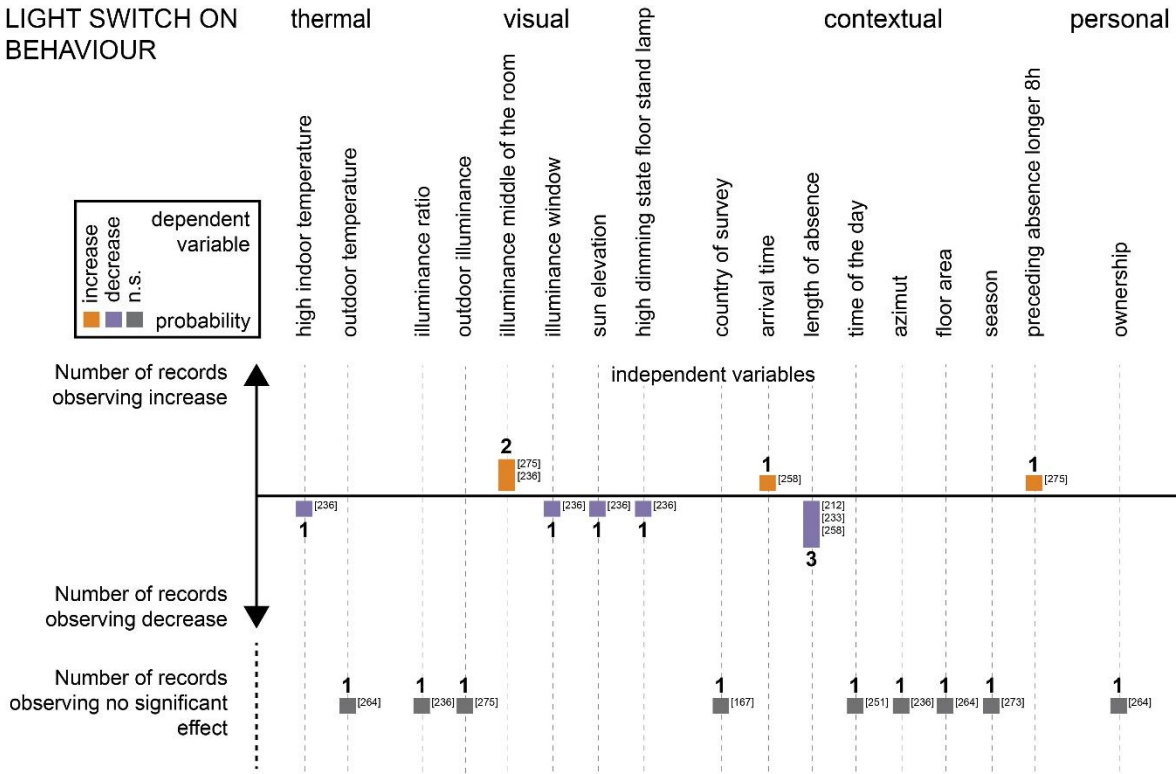

1
2 Fig. 11. Effects of physical, contextual and personal variables on light switch on behaviour.

BLIND CLOSING BEHAVIOUR

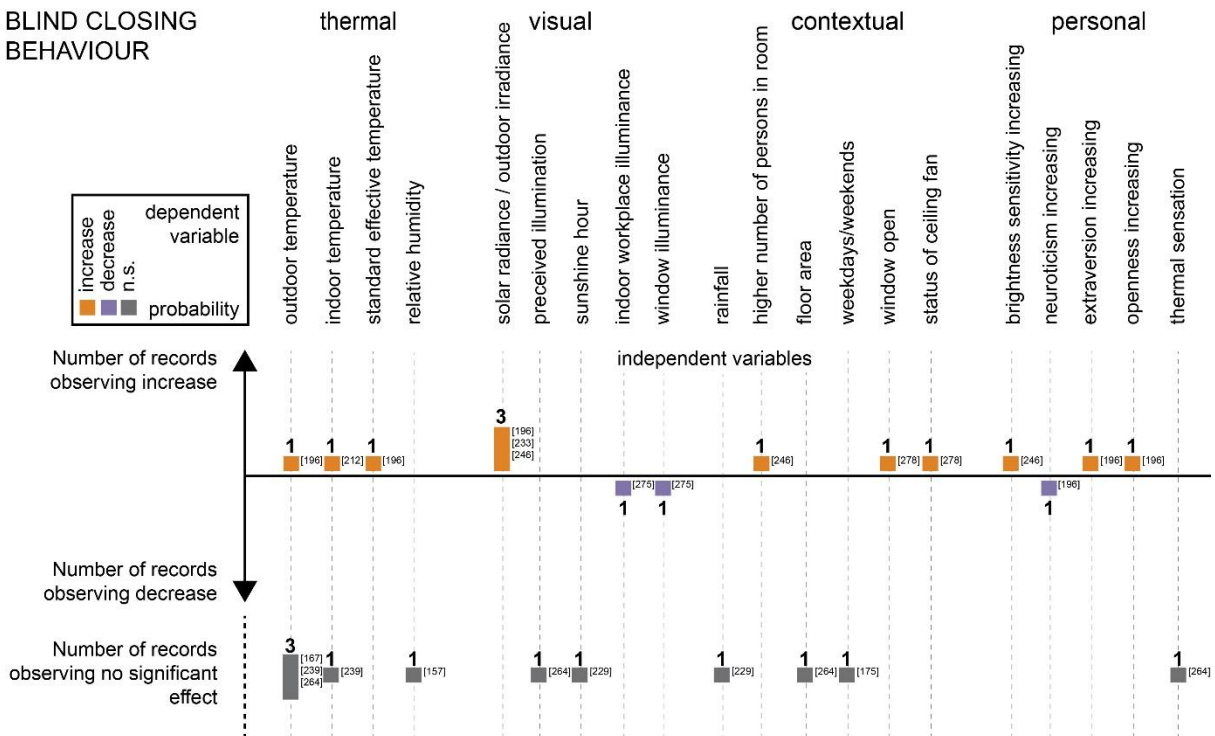

3
4 Fig. 12. Effects of physical, contextual and personal variables on blind closing behaviour.

1 **5.1. Physical multi-perceptual approaches**

2 The nineteen studies analysed in this subsection attempt to relate occupant behaviour to
3 multi-perceptual physical environmental conditions [46; 212-229].

4 **5.1.1 Motivational background**

5 The motivation behind the majority of these studies was to evaluate the drivers of occupant
6 behaviour in the context of multiple domains of occupant comfort. In general, all of the
7 studies aimed at a better forecasting and simulation of occupant behaviour under multiple
8 indoor environmental performance criteria. Specifically, all but few studies were concerned
9 with the effect of indoor and outdoor climatic conditions on occupant control of windows,
10 blinds, and/or lighting, as well as the derivative effect of such control on perceived thermal
11 comfort, lighting comfort, and/or building energy use.

12 The underlying objective was the characterization of the relationship between measurable
13 physical parameters, and occupant behaviour. Specific objectives include the evaluation of
14 the effect of solar insolation on perceived thermal comfort, lighting comfort, and occupant
15 controls of window blinds [215] and the development of a data-driven personalized
16 thermal comfort model and minimum daylight requirement model to be used for model-
17 predictive control of window blinds [213].

18 **5.1.2 Approaches**

19 All reviewed papers relied to some extent on physical monitoring of indoor environmental
20 conditions and direct monitoring or measurement of occupant control decisions (e.g.,
21 window opening behaviour). Most studies undertook some form of occupant comfort
22 evaluations via questionnaires, and several papers undertook monitoring of outdoor
23 climatic conditions (e.g., outdoor air temperature, and air pollution concentrations).

24 All but few papers described *field* studies of offices or dwellings. The exceptions
25 were *laboratory* studies [214; 218; 219]. All field studies took place in regions where there
26 are discernible heating and cooling seasons, and no studies were undertaken in climatic
27 regions such as the Tropics or Sub-Tropics.

28 The duration of behavioural studies followed one of three trends: they undertook either a
29 short duration of measurements in a manner of days [214; 219], a medium-term
30 measurement across a single climate season [212; 221; 227], or a much longer-term study
31 across several seasons up to an entire year or more [46; 213; 215; 216; 222; 224-226; 228;
32 229]. The shortest measurements had the controlled laboratory studies. A notable example
33 is Daum et al. [213], who collected over 6,800 individual survey responses over a period of
34 3 years.

35 The studies' methods of data analysis were, for example, correlations between the
36 probability of an action and environmental variables. For example, Inkarojit [215]
37 evaluated the correlation of the probability of occupants' opening or closing windows
38 against received solar radiation on window surfaces. Similarly, Daum et al. [213] used their
39 analysis to correlate the probability of window blinds opening/closing actions against
40 indoor air temperature. Various forms of regression methods, such as linear regression,

1 multiple linear regression, univariate and multivariate logistic regression, were used by all
2 studies.

3 **5.1.3 Findings**

4 Given an underlying, often implied understanding across all studies that occupant
5 behaviour is inherently stochastic, the main format of illustrated findings were probability
6 density functions of occupant behaviour against one or more parameters.

7 The findings from these papers defended widely understood principles of thermal and
8 visual comfort in the built environment, as opposed to revolutionising them or putting them
9 into question. For example, the studies which evaluated the extent to which window
10 open/close behaviour would be driven by outdoor climatic conditions, IAQ, or other
11 parameters, broadly concluded that indoor and outdoor air temperature, coupled with IAQ
12 and/or solar radiation, are the primary drivers of window control by occupants [46; 216;
13 217; 221; 222; 226; 228]. Outdoor air quality was identified as a moderate parameter of
14 influence, particularly when it is considerably poor [226]. While solar radiation should be
15 deemed a quasi-thermal parameter with a direct effect on indoor and outdoor air
16 temperature and indoor heat gains, IAQ is related to a different domain, so that window
17 open/close behaviour can be understood as a multi-domain problem.

18 All studies that evaluated the physical drivers and indicators of window blind and lighting
19 operation [212; 213; 215; 225; 229] observed the effect of multiple environmental
20 conditions on blind and lighting controls, but still found parameters of solar insolation to be
21 the primary driving force of control decisions. While window blinds are a form of solar and
22 thermal control, and electric lighting is needed in the absence of daylight, it is surprising,
23 that all studies suggested that blind and lighting control are univariate problems
24 determined by solar insolation alone.

25 **5.1.4 Identified gaps and future directions**

26 Overall, meteorological conditions were not usually measured adjacent to the buildings or
27 sites under analysis, or at least were not indicated to have been done so. Differences in
28 microclimatic conditions, from what is experienced directly outside a building envelope to
29 what is measured from a central weather station, is non-negligible and is a potential
30 limitation of correlations made between weather and human behaviour [226].

31 Of the studies examining window opening/closing behaviour, works such as Jeong et
32 al. [216] indicate that caution must be taken when data from only one or two seasons are
33 used. In other words, drivers of behaviour in winter may not apply in summer conditions,
34 and studies in either season may not apply to conditions under Autumn and Spring. The
35 effort to observe occupant behaviour across multiple seasons was, if not a norm across the
36 long-term works, an identified research gap across several of the medium-term studies. As
37 observed by Naspi et al. [222], this view may be the main research gap of studies in this
38 subsection.

39 Despite prior evidence that circadian lighting affects occupants' perception, only the
40 experimental studies evaluated the association of circadian lighting conditions on occupant

1 behaviour. The study of circadian lighting, both natural and artificial, and its effect on
2 human physiology and psychology warrants further attention by field studies. None of the
3 evaluated field studies explored whether light colours, or other indicators of circadian
4 lighting, affected occupant behaviour. We also observed that noise levels were not
5 frequently measured across studies that evaluated window open/close behaviour, even
6 though the relationship between noise and window operation is not trivial [230].

7 **5.2. Physical + contextual variables**

8 This section provides insights into thirty-one studies aimed at predicting or explaining
9 behaviours that include at least one type of physical and one type of contextual predictor
10 variable.

11 **5.2.1 Motivational background**

12 Similar to the studies identified in subsection 5.1, one of the key objectives behind the
13 majority of papers is to account for behaviour-related uncertainty in building energy
14 simulation and to develop models, which are hence developed to help bridge the gap
15 between measured and predicted energy consumption [31; 167; 203; 229; 231-243]. Some
16 of the studies stated that their contribution was based on the need to develop models for
17 specific geographic contexts or building types (e.g., hospital wards) [244]. Linked to this
18 objective is the investigation of cause-effect relationships between the operation of the
19 building by occupants and different technologies installed [245].

20 Other studies investigated control interaction for providing enhanced input for building
21 automation control [246] or the optimization of peak electricity loads [175]. Furthermore,
22 researchers stated that the key objectives were to gain better insights into occupants'
23 choices of adaptive opportunities for thermal comfort enhancement in specific
24 climatic contexts [140; 247-250], or into the effect of occupancy on perceived control and
25 behavioural patterns [206]. Other papers modelled occupant interaction with certain
26 controls to gain a better understanding on other environmental factors [251].

27 **5.2.2 Approaches**

28 The majority of papers addressed window control (N=16), next to window blinds control
29 (7), thermal adjustments (e.g. thermostat adjustment, switching on space heating and/or
30 cooling systems)(7), lighting control (7), and adjustment of fan speed (2). Multi-domain
31 independent variables were related to the thermal environment (36), the visual
32 environment (17), and IAQ (13). Only one record included information on acoustic
33 variables [248]. Amongst these independent variables, the most common for window
34 control behaviour models were related to indoor and outdoor temperatures [18; 167; 203;
35 206; 231; 233; 235-238; 240; 241; 244; 248; 252] and IAQ [18; 231; 235-237; 241; 244;
36 248; 252]. Blinds behaviour models mostly included thermal variables [167; 175; 206; 229;
37 233; 239; 253]; and visual variables [206; 229; 233; 239; 253]. The papers investigating
38 thermal adjustments only included thermal environmental variables in combination with
39 contextual variables [167; 206; 232; 238; 245; 249; 250].

1 The contextual factors included the time of day or arriving/leaving times [31; 203; 231;
2 233; 236; 237; 239; 240; 242; 246], the previous control state [203], geographical
3 location [238; 167], ventilation type [203; 238; 140], building system and envelope
4 characteristics (e.g., installed technologies, building envelope efficiency, window opening
5 size) [244; 245], facade orientation [251; 175], dress code [249], season or cloud
6 cover [175], socio-economics [232], and occupancy levels [206].

7 Most of the 26 field studies used physical measurements (24) and 11 of them also surveys.
8 Two studies used a combination of measurements, surveys, and observations, and one field
9 study used only observations. The duration of the data collection varied from a few days
10 (laboratory studies such as [206]) up to several years [239].

11 Some of the studies combined field measurements with a questionnaire-based
12 investigation [140; 246; 167], or used questionnaires [232] or interview techniques [245]
13 independently. Most records refer to office environments (22), next to residential buildings
14 (9), and hospital environments (1).

15 The statistical methods used were logistic regression [236; 237; 240; 242; 244], probit
16 analysis [203; 238; 167], neural networks [231], Markov processes [239], data mining
17 approaches [237], and Bayesian networks [31; 241]. Other statistical analysis included
18 Generalized Estimation Equations [246], ANOVA analysis [115], weighted and linear trend
19 lines [140].

20 **5.2.3 Findings**

21 A wide range of studies found a strong dependency between the time of day and window
22 control patterns in offices [236; 237; 203] and residential buildings [31; 235; 240; 252].
23 Hansen et al. [232] found that window operation in Danish households was correlated
24 with building characteristics, such as technical installations and energy efficiency of the
25 building envelope, while it was not correlated with the building age. Shi et al. [244] found
26 that windows with large adjustable opening sizes are more likely in ajar state and the
27 interaction frequency is much higher. Based on questionnaires, the indoor temperature at
28 which a substantial proportion of occupants start to open windows for ventilation was
29 observed similar in all climates, but window use was more common in Europe than in
30 Pakistan [167; 238]. Rainfall was also found to have a significant effect on opening a
31 window, along with the location of the office (and its relation to safety) [254].

32 In line with section 5.1.3, studies including physical and contextual variables found
33 correlations between window operation and IAQ indicators (e.g. CO₂ and VOC
34 concentrations) [31; 231; 235; 236; 252]. Stazi et al.'s review [18] found that window
35 opening was mostly linked to CO₂ concentration in residential buildings. According to Fabi
36 et al. [255], all papers that measured IAQ indicators found correlations with window
37 operation.

38 Several studies found a strong relationship between window blind control operation and
39 the time of day [233; 239; 246], while others did not [251]. Another important contextual
40 factor influencing window blinds operation is the facade orientation [233; 246; 251]. Time

1 of day and/or arrival/leaving times play an important role also for light switch
2 behaviour [233; 242].

3 **5.2.4 Identified gaps and future directions**

4 Although all studies included at least one contextual variable, further work needs to create
5 a comprehensive approach including a more extensive set of contextual and potentially
6 personal factors.

7 Regarding contextual physical environmental factors, further attention should be paid to
8 the ease and convenience of using building system interfaces, the state of other devices (or
9 controls) and the influence of building automation routines on behavioural patterns.
10 Furthermore, contextual factors such as interior design and furniture layout, or the relation
11 between the indoor and outdoor environments (e.g., view to the outside) need to be further
12 investigated. Even various social factors, such as social constraints, group interactions,
13 the presence of multiple occupants on occupant behaviour in open space versus private
14 office [206], and control behaviour due to safety reasons need to be further investigated.
15 Although some studies compared a few different geographical locations, a more
16 comprehensive approach is needed to understand the variability of occupant behaviour in
17 different climatic zones and/or cultural backgrounds.

18 Related to the research method, relationships between indoor variables and window
19 transitions, based purely on survey responses (e.g. [238; 167]), must be treated with
20 caution. Since the window state affects indoor variables [235; 255], conditions just prior to
21 an event are needed.

22 **5.3. Physical + personal variables**

23 This subsection reviewed six studies looking at physical and personal predictors, which
24 could explain some of the differences amongst adaptive behaviours. The personal
25 predictors include clothing habits, socio-cultural expectations, personality traits, and
26 occupancy preferences.

27 **5.3.1 Motivational background**

28 Most studies investigating physical and personal variables concurrently aimed to develop
29 occupants' behaviour models to control building systems.

30 **5.3.2 Approaches**

31 The studies consider thermal systems [256; 257], lighting systems [198; 258], or thermal
32 and lighting systems [196]. These systems were generally operating in non-stressful
33 conditions (i.e. acceptable environmental conditions). One common dimension considered
34 in study designs is their longitudinal aspect, with studies lasting from a day to many
35 months.

36 Research exploring physical and personal variables as predictors to behaviour analysed
37 these two predictors independently or jointly. Indraganti et al. [256] applied descriptive
38 and inferential analysis to explore the relationships between occupant's behaviours (14

1 control actions) and personal variables (dress habits); in parallel, the relationship between
2 occupant's behaviours (air-conditioning and fan usage) and physical variable (outdoor daily
3 mean temperature) was explored through logistic regression. Schweiker et al. [196] applied
4 mixed effect regression analysis to explore the effect of physical (thermal and visual) and
5 personal (personality traits) variables on occupant's behaviours (clothing adjustments,
6 window opening, blind closing, and ceiling fan usage). Gunay et al. [258] applied discrete-
7 time Markov logistic regression to explore the effect of physical (ceiling illuminance) and
8 personal (occupant's presence) variables on occupant's behaviours (light switching and
9 window blind actions).

10 **5.3.3 Findings**

11 Most studies highlight that occupants respond to environmental discomfort, but fail to
12 revert the state once discomfort disappears. Gunay et al. [258] observed that occupants
13 closed blinds upon glare and switched-on lights upon low daylight; but they often failed to
14 open the blinds and to switch-off the lights. Occupants' locus of control is not a concern in
15 non-stressful/acceptably good conditions [198]. Furthermore, occupants' interactions with
16 building environmental systems may be linked to daily routine and habits [257] and
17 differences in behavioural patterns between sub-populations based on personality traits
18 are considerable high [196].

19 **5.3.4 Identified gaps and future directions**

20 Most studies highlighted a lack of the contextual dimension, including climate, seasonal
21 effects, building types, building orientations, complexity of controls, interior layout,
22 single/shared spaces, and organisational policies [198; 196; 257; 258]. In addition, multi-
23 domain physical predictors are missing except for one study including IAQ [196]. Finally,
24 studies should consider the Hawthorne effect already discussed in section 4.1.4 and by
25 Schweiker et al. [196]. In general, very few studies have systematically assessed the effect of
26 personal variables other than age and gender on behaviour.

27 **5.4. Physical + contextual + personal variables**

28 This subsection summarizes eleven studies looking at the influence of physical
29 environmental conditions and their interactions with contextual and personal factors on
30 occupant behaviour [256; 259-268].

31 **5.4.1 Motivational background**

32 As in previous subsections, modelling of occupants' behaviour for use in building
33 performance simulations for office buildings is the main motivation common in studies
34 across the world. Thereby, the main research focus is on window control behaviour, and its
35 impact on the energy consumption.

36 **5.4.2 Approaches**

37 The majority of the publications were field studies, often based on or involving
38 questionnaire surveys [256; 257; 262; 264]. Almost all the studies used logistic regressions

1 to evaluate the cross-main effects of environmental and non-environmental factors on the
2 occupants' behaviour. The analysis of the interactions between different predictors has not
3 been established yet, but there is a growing body of literature with results that point out its
4 importance [267; 268].

5 The four commonly studied behaviours are interactions with windows, use of heating
6 controls, electric lighting use, and interaction with shades.

7 The physical variables were the internal and outdoor air temperature, globe temperature
8 and air velocity. Some studies collected additional measurements of carbon dioxide
9 concentration, particulate matter [266], and solar radiation [267]. Contextual factors
10 included building features and maintenance, the orientation of windows, floor level
11 (security), the type of office, and socio-cultural aspects such as habits and dress code.
12 Personal factors included perceived control.

13 The number of residential and office building studies was similar, but residential
14 longitudinal studies usually have a longer duration. Office studies benefit mainly from a
15 large number of respondents albeit often being cross-sectional surveys for shorter periods.

16 **5.4.3 Findings**

17 While all studies observed physical, contextual, and personal variables, window use was
18 mainly analysed as a function of outdoor temperature [256; 264], indoor temperature, and
19 IAQ [268]. Often, the probability of an opened window is positively correlated with outdoor
20 temperature, but Kim et al. [262] showed a bell-shaped relationship were above a certain
21 ambient temperature this positive correlation is reversed and the number of closed
22 windows increases again. This effect was observed in previous single-domain studies [269]
23 and shows the importance of local context in the interpretation of the observed behaviours.

24 In an office building in the hot and humid climate region of India, window use was mostly
25 defined by contextual factors such as the time of day; meanwhile, the occupants did not
26 interact with other building controls [256]. A study in China [266] concluded that the
27 window used in the studied offices was a combination of physical and contextual factors
28 such as the sunshine hours. Wei et al. [265] revealed a seasonal effect and a significant
29 influence of the location of the window (ground floor or not) and personal preference
30 (habitual or not) on the "end-of-day" window state. Absence in subsequent days and
31 contextual factors such as daylight saving time and façade orientation did not have a
32 significant effect. Seasonal effects were also evident in a South Korean study [268]. In
33 spring, window use was affected by the CO₂-concentration, whereas in summer the indoor
34 temperature was a significant driver. In winter, indoor temperature and CO₂-concentration
35 did not have a statistically significant effect. Yun et al. [257] showed a significant
36 relationship between comfort and perceived control over temperature in NV buildings and
37 highlighted that a change of the windows' state is more likely with high compared to low
38 perceived control [257].

39 The lighting behaviour in households was found to be influenced by the solar radiation,
40 perceived illumination, outdoor temperature, thermal sensation and IAQ [264] showing the
41 complexity of the interrelationships between multiple physical and personal variables.

1 The interaction of household occupants with the radiator thermostat set-points showed
2 that the occupants could be classified into different behaviour categories according to the
3 number of interactions with the heating controls [267]. The set-point changes were
4 significantly influenced by the indoor relative humidity, outdoor ambient temperature,
5 solar radiation, wind speed and time of day.

6 **5.4.4 Identified gaps and future directions**

7 Above findings show the importance of contextual factors and how these non-physical
8 factors affect occupants' perception and behaviour. They emphasize the need for systematic
9 analysis of the contextual factors and study their interactions with the physical and
10 personal variables. However, there is a lack of research into the relationships and
11 interactions amongst multi-perceptual, contextual, and personal factors and their combined
12 influence on occupant behaviours. While there seems to be a consensus on the physical
13 variables measured, there are still differences in the selection of contextual and personal
14 variables and their reporting. The type of building system varied with the particularities of
15 the location (e.g. climate, prevailing architecture and construction typologies) and seemed
16 biased by what the sites permitted and the studies' aims. The main reason could be that
17 these parameters are often "fixed", defined by the building and location and not directly
18 controlled by the researchers.

19 Contextual factors are mainly referred to in generic context without systematically
20 assessing their interactions and impact on other predictors. Missing relationships, for
21 example, are different climatic and cultural background factors on window use
22 behaviour [257].

23 In relation to lighting studies, research is required to assess the effect of light on
24 psychological factors and investigate the duration of the effects on comfort [260].

25 **5.5. Physical + multi-behavioural approaches**

26 The focus of the 13 studies in this subsection is on the interrelations between the indoor
27 environmental conditions with a combination of different behavioural responses [212; 225;
28 254; 258; 270-278].

29 **5.5.1 Motivational background**

30 The aim of these studies is related again to energy savings through more realistic modelling
31 of occupancy behaviour in simulations. The underlying objective was to characterise the
32 relationship between physical environmental parameters and occupant behaviour
33 including the assessment of the interactions and combined effect of multiple behaviours.

34 **5.5.2 Approaches**

35 Similarly to the previous subsection, the behaviours investigated were interactions with
36 windows, heating and lighting controls including electric lights and shading.

37 In contrast to the previous subsection, the research in this field is focused on office
38 buildings. Window use remains the most prominent behaviour and is studied in

1 combination with personal adaptation behaviours (e.g. physiological responses [278],
2 clothing adjustments, and interactions with the heating and cooling systems [274]).
3 Responses to changes in visual conditions are discussed in light of interactions with shades
4 and electric lighting [212].

5 The physical variables commonly considered were the indoor and outdoor air temperature,
6 relative humidity, wind speed, illuminance, and the level of CO₂-concentration as an
7 indicator of IAQ. The non-physical variables differed again with the building characteristics
8 and the researchers' objectives and included season, period of day, type of room and
9 current state of controls. However, the analysis of the significance and impact of different
10 variables followed mostly again a cross-main effects approach.

11 Data collection occurred through surveys with concurrent field measurements, except for
12 one study in a controlled office-like environment [278].

13 **5.5.3 Findings**

14 Despite the influence of indoor and outdoor physical variables confirming observations of
15 previous subsections, the occupancy state (arrival/departure) was the most often studied
16 other behaviours. Langevin et al. [274] found a significant influence of indoor/outdoor
17 temperature and arrival time on clothing, fan, heater, and window use behaviours. While
18 the occupancy state interacted with window opening [236], the previous or next absence
19 for more than 8 hours did not have a significant effect on the opening behaviour during
20 departure or the closing behaviour upon arrival [275]. In contrast, the closing behaviour
21 during departure and the opening behaviour during arrival were influenced by the absence
22 duration. Fabi's review of the physical predictors that influence light switching behaviour
23 identified the key drivers absence duration and daylight [273]. Season, light sensor control,
24 and time spent with the light off were not significant. Similarly, lighting use is a function of
25 the daylight availability and the duration of absence before switching the lights on or after
26 switching the lights off [212]. In the intermediate period, the only significant variable is the
27 worktop daylight illuminance level. The same study concluded that the majority of shade
28 adjustments take place during the first arrival or last departure of the day.

29 Schweiker et al.'s analysis of the interactions between behaviours indicates a significant
30 impact of the fan operation and clothing level on the window behaviour but no significant
31 effect of sun shading [278]. In addition, the window state affects significantly fan and sun
32 shading use. Sanati et al. [271] found no significant effect between sunlight availability,
33 window occlusion, and electric light usage in a single university building.

34 **5.5.4 Identified gaps and future directions**

35 The low number of studies in this subsection showed that the influence amongst the
36 studied behaviours themselves is seldom thoroughly assessed. Fabi et al. [236] suggested
37 that there is a need to investigate the correlation of behaviour responses to multiple,
38 instantaneous factors.

1 **6. Discussion and conclusion**

2 Overall, this review reveals the diversity of approaches and findings of multi-domain
3 analysis. This section compares and discusses the findings and identified gaps from
4 individual subsections above.

5 **6.1 Motivational background**

6 In perceptual studies, the main motivation is a better understanding of the phenomena
7 involved. In behavioural studies, the aim is mostly model development for predictive
8 purposes. This does not mean that perceptual studies do not involve any aspects of
9 prediction, but, the authors stated to focus on understanding, rather than modelling.

10 **6.2. Approaches**

11 A variety of methodological approaches for research design and assessment are presented
12 in the literature. Whereas laboratory studies are the most frequent type of perceptual
13 multi-physical studies (subsection 4.1), field studies dominate in all other categories. New
14 approaches using virtual environment (e.g. [272]) published promising results, but still lack
15 sufficient evidence that they permit the reproduction of effects observed in reality.

16 Geographical contexts are mainly from developed
17 countries ([https://www.un.org/en/development/desa/policy/wesp/wesp_current/2014w
18 esp_country_classification.pdf](https://www.un.org/en/development/desa/policy/wesp/wesp_current/2014wesp_country_classification.pdf)), which likely represents the availability of research funding,
19 rather than the contextual diversity or the population size in a particular context.
20 Therefore, the findings presented are not necessarily representative of buildings, lifestyles,
21 climate zones or cultural regions in developing countries.

22 Context is more likely considered in studies on human behaviour than perception. This may
23 be due to the advantages of laboratory studies to control multi-physical influences on
24 perception without contextual considerations. For example, the experimental design by
25 Kulve et al. [104] enabled to avoid natural correlations among environmental variables and
26 to causally test the effect of variables on outcomes of interest. In addition, it allowed testing
27 if cross-modal effects occurred at a specific level of one variable (e.g., only in comfortable
28 thermal conditions) or were independent of the level of the other variable (i.e. the same
29 cross-modal effect occurred at all the levels of the other variable).

30 Few studies considered personal variables beyond demographics despite their inclusion by
31 means of questionnaires being an easy extension in laboratory studies. Participants in
32 laboratory studies are not otherwise distracted from their work or leisure activities as it
33 would be the case in field studies. Still, the application of findings relating to personal
34 factors in the building design process with generally unknown user profiles is less clear, but
35 potentially beneficial for specific buildings (e.g. retirement homes) or individualized
36 operation strategies.

37 Contextual influences and occupant behaviour are more difficult to study in an artificial
38 setting of a laboratory environment. The low frequency of interactions (i.e., 1 to 4 actions
39 per day) would require very long and expensive study periods uncommon in laboratory

1 settings. Still, more attempts would be beneficial to reveal true causalities, because field
2 studies also have drawbacks. The lack of experimental control over environmental
3 conditions means that the conditions cannot be causally related to human outcomes, and
4 that environmental conditions are likely to naturally co-occur in predictable ways (e.g., a
5 position near a window in the summer is likely warmer and brighter than one on the
6 interior of a room).

7 The question of causality is also relevant to several papers addressing contextual factors,
8 such as green vs. conventional buildings or NV vs. AC buildings in field studies with a
9 limited number of buildings. These studies assign observed differences in perception or
10 behavioural patterns to the type of building, while neglecting the multitude of other
11 potential influences (e.g., non-documented contextual or personal differences). Without
12 addressing, discussing, or eliminating potential confounding variables, assigned causalities
13 could be mistaken. For potential meta-analyses and other comparisons, well documented
14 contextual elements of the environment under investigation are crucial. Unfortunately,
15 contextual elements and spatial characteristics such as relative position to control devices
16 are often poorly documented– if at all in the text. Therefore, we recommend using the
17 categories presented in Figure 1 together with aspects mentioned in previously published
18 ontologies [279] to describe the contextual aspects.

19 The assessment of the dependent variables varies largely. While there are meaningful
20 differences in behavioural studies, the perceptual studies vary in the dimension assessed
21 (e.g., thermal sensation, preference, or acceptability), and the type of scale (e.g., categorical,
22 continuous). There is a tendency to ignore previous approaches and develop one’s own
23 instruments, without benchmarking them against existing ones (see also subsection 4.1.4).
24 As discussed earlier [20], this variety impedes comparing results across studies, and
25 understanding whether differences between outcomes of two studies are a result of the
26 instrument or differences in (unreported) contextual or personal aspects.

27 In addition to the diversity in data collection approaches, the analysis approaches taken are
28 at different levels. Studies, most likely in laboratories, exist, which apply multi-domain
29 approaches from study design to analysis. At the same time, the number of field studies
30 reporting the collection of multi-perceptual data is increasing. However, their potential is
31 poorly utilized, because the data’s multi-perceptual nature is not considered during
32 analysis. The reasons for such omission can be manifold. First, limits in word counts in
33 combination with the complexity of describing multi-physical data and their analysis might
34 lessen the potential to report multi-domain analysis approaches first, but cannot be an
35 argument for missing subsequent publications. Second, multi-domain interaction or cross-
36 over statistical analyses might have been conducted, but not reported due to non-significant
37 results; a common issue leading to scientific bias as reported earlier [5]. Third, a lack of
38 statistical skills might have impeded the integration of interaction terms in statistical
39 analysis.

40 To overcome these shortcomings, all researchers, reviewers, and editors are encouraged to
41 demand extensive descriptions and analysis methods for multi-domain studies until there is
42 a substantial body of evidence that certain aspects are not relevant for a specific perception
43 or behaviour.

1 Further research shortcomings in all categories are small sample sizes, low diversity in
2 participants, representativeness of samples, and environment. In contrast to previous
3 reviews' discussions [20], which emphasize the general need for larger sample sizes, we
4 argue that the actual number of cases is not the main problem. Examples exist throughout
5 scientific literature in a variety of disciplines, which show the benefits of studies with small
6 sample sizes that still increase the existing knowledge (see Flyvbjerg [280] for an extended
7 discussion). Small sample sizes are to be criticized when lacking a clear strategy for sample
8 selection and being based on so-called convenience samples, i.e. those at hand of the
9 researcher. In contrast, Flyvbjerg [280] discusses information-oriented sampling strategies
10 including the selection of critical cases or maximum variation cases, which enable the
11 extraction of new knowledge even with small sample sizes. At the same time, he emphasizes
12 that small sample sizes are very suitable for falsification of theories – sometimes a single
13 case is sufficient –, but less for generalizing.

14 **6.3 Findings**

15 Overall, results are often inconclusive and in part contradictory (see Figures 8 to 12). Few
16 observations are repeatedly shown: significant effects of visual properties on thermal
17 perception exist, though they are partially contradictory and a comparable amount of
18 studies found no significant interactions. A general statement seems not possible due to
19 explainable effects, that warm light colours are perceived as satisfactory in cold
20 environments and vice-versa. Thermal properties have been shown to influence acoustic
21 perception, while the number of non-significant findings is again in the same magnitude.
22 Related to occupant behaviour, the largest evidence was observed for thermal and IAQ
23 related variables interacting on the window opening behaviour. Such finding is not
24 surprising given that windows enable to control IAQ and thermal conditions except for
25 reasons of outdoor conditions such as high air pollution. Contradictory results are apparent
26 in all categories of multi-domain studies. While such observation can be assigned to the low
27 number of studies in subsections 4.4 and 5.4 and 5.5, it is more surprising for
28 subsections 4.1, 4.2, 5.1, and 5.2, which are based on a much larger number of items.

29 Despite the large variety of independent variables assessed, there is a need to clarify
30 whether those variables are the most influential ones explaining variances observed in
31 perception or behaviour, or solely the most accessible ones. This necessity is linked to the
32 next gap in the reviewed literature: missing theoretical foundation. One could assume that
33 many, if not all studies, are based on underlying theories of human physiology and
34 perception. However, very few articles mention theories when describing their study
35 design or discussing their findings. Not all studies need to be designed to falsify an existing
36 theory; case studies, especially very detailed ones looking at individual cases, are also very
37 suitable to develop new theories inductively. Nevertheless, a theoretical foundation is
38 meaningful to link and explain potentially diverse findings and to justify the selection or
39 exclusion of specific physical, contextual, or personal variables. Theories relevant for multi-
40 domain approaches may originate from disciplines like psychology, sociology, but also from
41 neurology or physiology. One of the few research items mentioning theoretical foundations
42 is Candas et al. [21], who mention neurophysiological aspects related to multisensory
43 integration in their introduction. However, they do not relate their review findings to such
44 approaches. The literature on multisensory integration [281-283] outlines first

1 explanations to what extend interactions can be additive, antagonistic, or synergetic. For
2 example, Talsma et al. [283] propose a framework that shows the interaction between
3 multi-physical perception and attention.

4 There are few studies linking perception and action. In behavioural studies, physical
5 quantities are assessed which relate to perceptual domains. For example, the assessed
6 indoor air temperature can be related to thermal perception. As such, the perception of
7 such physical indoor environmental qualities is an assumed prerequisite for the action.
8 Given the low observed correlations between observed physical variables and behavioural
9 actions (R^2 are frequently below .2), it might be necessary to include additional variables or
10 to consider different approaches to understand occupant behaviour. Thereby, several
11 aspects are to be considered. First, perceptual studies show a large variance between and
12 within individuals in the perception of the same physical stimuli. Second, theories in the
13 field of psychology together with empirical findings suggest a difference between the
14 intention to perform an action and the action itself [284-286]. Not surprisingly, previous
15 research has revealed a multitude of factors influencing occupant behaviour [5], which
16 potentially affect the relationship between intention and action (e.g., the level of perceived
17 control, the distance to means of control, or other work tasks that require full attention).
18 Therefore, we recommend looking further at the relationship between perception and
19 action and evaluating whether those contextual and personal factors affecting behaviour
20 effect perception and vice versa.

21 **6.4 Future directions**

22 Based on the results and discussion presented in this review, we propose the following
23 points to be considered by authors and reviewers of future multi-domain approaches.

24 The first point is easily applicable and pointing to a limitation of this review: keywords for
25 multi-domain studies. Commonly, an *a priori* defined set of search terms is used for a
26 systematic review. However, an initial review of keywords used by a selection of relevant
27 multi-domain articles revealed that the keywords for the individual domains investigated
28 are used, but no specific keyword to clarify the multi-domain approach. Therefore, a
29 systematic search through a set of keywords would have required searching for all possible
30 combinations of individual domain keywords. Given the number of authors involved and
31 their diverse backgrounds from different domains, we decided to start with the collection of
32 articles known to us in combination with a backward and forward search of cited or citing
33 articles. This strategy might have failed to find all relevant research items. However,
34 articles, which have not been cited or do not cite any of the 200+ articles considered for this
35 review might be of minor relevance and likely not adding much to our general conclusions.
36 Still, we suggest future studies to use a unique keyword such as “multi-domain” or
37 “combined effects” in order to facilitate future review efforts.

38 Second, researchers should clarify whether their research is intended to explore new
39 influences, i.e. supporting the development of new theories or the extension of existing
40 ones, or test an existing theory. In addition, researchers should clearly state the limitations
41 of their studies, especially when dealing with small samples, discuss the applicability and
42 comparability of results in the context of existing knowledge, and be careful with false
43 causalities arising from unobserved confounding factors. Thereby, generalization is

1 relevant to find common patterns. However, addressing individual differences and
2 revealing factors leading to such differences, even for single cases, is of high importance in
3 order to consider outliers as valuable points of information. The latter assertion is valid
4 either because these points are true outliers and explanations available (see e.g. O'Brien et
5 al. [287] for a qualitative approach to explain outliers). Or, because they point to
6 methodological issues (e.g., the question asked is prone to misinterpretation under specific
7 circumstances).

8 Third, advanced statistical analysis methods for capturing interactions and their complexity
9 are recommended. Aside from the application of multiple regression including interaction
10 terms, hierarchical modelling or structural equation modelling, which permit
11 understanding of interdependent relationships are appropriate methods for this task.
12 Additionally, analysis methods derived from machine learning approaches may be useful to
13 detect underlying patterns in large and rich datasets. When reporting statistical results,
14 significant levels together with effect sizes are crucial information for later meta-analysis.

15 Fourth, missing agreement on classification of contextual and personal variables leads to
16 the same terms used for different aspects. Therefore, general classifications (e.g., “green
17 buildings”) should be avoided in favour of explicit descriptions (e.g., LEED Platinum
18 certified buildings).

19 Fifth, interactions are complex by nature. Given the large variety of potential interactions
20 between physical, contextual and personal variables, collective approaches, which build
21 upon the knowledge generated, are necessary. We thus encourage researchers to join or
22 establish collaborative activities such as those developed within international research
23 groups like the IEA EBC Annex 79 “Occupant-Centric Building Design and Operation”
24 (<http://annex79.iea-ebc.org/>), which is the basis for this review. Moreover, a common
25 framework is necessary, which facilitates meta-analysis efforts in the future and allows
26 aligning one’s own research into the line of previous research. As a start, our review table is
27 available as a dynamic open-access document permitting others to add their research
28 related to multi-domain approaches
29 (https://osf.io/gnvp2/?view_only=00b08233881f471795d1d8dee79e9828). We hope that
30 this document will serve as a growing knowledge base to increase collectively our
31 knowledge related to multi-domain influences on perception and behaviour.

32 Sixth is the balance between benefit and risk of increasing the complexity of perceptual or
33 behavioural models partly addressed in behavioural studies by means of statistical
34 measures such as Akaike’s Information Criterion [288]. Future studies need to investigate
35 under which circumstances additional factors are meaningful, given issues such as over-
36 fitting and error propagation. This question is best answered based on a solid theoretical
37 foundation together with a clear description of the potential application of the results.

38 Combining all these conclusions necessitates designing studies within a framework of
39 occupant perception and behaviour that accounts for the complexity of the physiological-
40 perception-cognition-decision-action-automation-building system. First examples for such
41 frameworks have been proposed [289; 290] and attempts to challenge them by means of
42 field or laboratory studies are highly recommended. In addition, the development of
43 guidelines on this topic is an expected future development of this work.

1 Acknowledgements

2 This review was conducted within the framework of IEA-EBC Annex 79.

3 Marcel Schweiker would like to acknowledge funding received from the Federal Ministry
4 for Economic Affairs and Energy (BMWi) under Grant no. 03EN1002A.

5 Elie Azar would like to acknowledge the financial support received from the Abu Dhabi
6 Department of Education and Knowledge (ADEK) under Grant AARE18-063.

7 Salvatore Carlucci and Matteo Favero would like to acknowledge funding received from the
8 Research Council of Norway and the Research Centre on Zero Emission Neighborhoods in
9 Smart Cities (FME ZEN) under Grant no. 257660.

10 Anna Laura Pisello and Cristina Piselli would like to thank the Italian Ministry of research
11 for supporting the follow up of this investigation through NEXT.COM PRIN 2017 project,
12 20172FSC4_002 “Towards the NEXT generation of multiphysics and multidomain
13 environmental COMfort models: theory elaboration and validation experiment”.

14 S.G. would like to thank the Sustainable Energy Research Group (energy.soton.ac.uk) for
15 supporting this work.

16 Verena M. Barthelmes would like to acknowledge the funding received from the Swiss
17 Federal Office of Energy (SFOE) under contract no. SI/501895-01.

18 Rune Korsholm Andersen would like to acknowledge the funding received from the
19 Technology Development and Demonstration Program – The Danish Energy Agency (EUDP)
20 under Grant number 64 018-0558.

21 Shengbo Zhang and Maedot S. Andargie would like to acknowledge the funding support
22 from the Natural Sciences and Engineering Research Council of Canada (NSERC), [RGPIN-
23 2016-06325] and Ontario Early Researcher Award. Shengbo Zhang would also like to
24 acknowledge the funding support from the RDH Building Science Inc.

25 References

26 [1] N.E. Klepeis, W.C. Nelson, W.R. Ott, J.P. Robinson, A.M. Tsang, P. Switzer, J.V. Behar, S.C.
27 Hern, W.H. Engelmann, The National Human Activity Pattern Survey (NHAPS): a resource
28 for assessing exposure to environmental pollutants, *Journal of Exposure Science &*
29 *Environmental Epidemiology*. 11 (2001) 231–252. <https://doi.org/10.1038/sj.jea.7500165>.

30 [2] C. Schweizer, R.D. Edwards, L. Bayer-Oglesby, W.J. Gauderman, V. Ilacqua, M. Juhani
31 Jantunen, H.K. Lai, M. Nieuwenhuijsen, N. Künzli, Indoor time–microenvironment–activity
32 patterns in seven regions of Europe, *Journal of Exposure Science & Environmental*
33 *Epidemiology*. 17 (2007) 170–181. <https://doi.org/10.1038/sj.jes.7500490>.

34 [3] Z. Yu, B.C.M. Fung, F. Haghghat, H. Yoshino, E. Morofsky, A systematic procedure to
35 study the influence of occupant behavior on building energy consumption, *Energy and*
36 *Buildings*. 43 (2011) 1409–1417. <https://doi.org/10.1016/j.enbuild.2011.02.002>.

- 1 [4] ASHRAE, Guideline 10-2016 - Interactions Affecting the Achievement of Acceptable
2 Indoor Environments, American Society of Heating, Refrigerating and Air-Conditioning
3 Engineering, Atlanta, USA. (2016).
- 4 [5] M. Schweiker, S. Carlucci, R.K. Andersen, B. Dong, W. O'Brien, Occupancy and occupants'
5 actions, in: Exploring Occupant Behavior in Buildings: Methods and Challenges, Springer
6 International Publishing, 2017: pp. 7–38. https://doi.org/10.1007/978-3-319-61464-9_2.
- 7 [6] M.A. Ortiz, S.R. Kurvers, P.M. Bluysen, A review of comfort, health, and energy use:
8 Understanding daily energy use and wellbeing for the development of a new approach to
9 study comfort, Energy and Buildings. 152 (2017) 323–335.
10 <https://doi.org/10.1016/j.enbuild.2017.07.060>.
- 11 [7] R.F. Rupp, N.G. Vásquez, R. Lamberts, A review of human thermal comfort in the built
12 environment, Energy and Buildings. 105 (2015) 178–205.
13 <https://doi.org/10.1016/j.enbuild.2015.07.047>.
- 14 [8] M. Schweiker, G.M. Huebner, B.R.M. Kingma, R. Kramer, H. Pallubinsky, Drivers of
15 diversity in human thermal perception – A review for holistic comfort models,
16 Temperature. 5 (2018) 308–342. <https://doi.org/10.1080/23328940.2018.1534490>.
- 17 [9] L. Edwards, P. Torcellini, Literature Review of the Effects of Natural Light on Building
18 Occupants, NREL, 2006. <https://doi.org/10.2172/15000841>.
- 19 [10] A.D. Galasiu, J.A. Veitch, Occupant preferences and satisfaction with the luminous
20 environment and control systems in daylight offices: a literature review, Energy and
21 Buildings. 38 (2006) 728–742. <https://doi.org/10.1016/j.enbuild.2006.03.001>.
- 22 [11] C. Pierson, J. Wienold, M. Bodart, Review of Factors Influencing Discomfort Glare
23 Perception from Daylight, LEUKOS - Journal of Illuminating Engineering Society of North
24 America. 14 (2018) 111–148. <https://doi.org/10.1080/15502724.2018.1428617>.
- 25 [12] K.G. Van Den Wymelenberg, Visual comfort, discomfort glare, and occupant
26 fenestration control: Developing a research agenda, LEUKOS - Journal of Illuminating
27 Engineering Society of North America. 10 (2014) 207–221.
28 <https://doi.org/10.1080/15502724.2014.939004>.
- 29 [13] J.M. Daisey, W.J. Angell, M.G. Apte, Indoor air quality, ventilation and health symptoms
30 in schools: an analysis of existing information, Indoor Air. 13 (2003) 53–64.
- 31 [14] N.-G. Vardaxis, D. Bard, K. Persson Wayne, Review of acoustic comfort evaluation in
32 dwellings—part I: Associations of acoustic field data to subjective responses from building
33 surveys, Building Acoustics. 25 (2018) 151–170.
34 <https://doi.org/10.1177/1351010X18762687>.
- 35 [15] N.-G. Vardaxis, D. Bard, Review of acoustic comfort evaluation in dwellings: part II—
36 impact sound data associated with subjective responses in laboratory tests, Building
37 Acoustics. 25 (2018) 171–192. <https://doi.org/10.1177/1351010X18772026>.
- 38 [16] K.W. Ma, H.M. Wong, C.M. Mak, A systematic review of human perceptual dimensions of
39 sound: Meta-analysis of semantic differential method applications to indoor and outdoor

- 1 sounds, *Building and Environment*. 133 (2018) 123–150.
2 <https://doi.org/10.1016/j.buildenv.2018.02.021>.
- 3 [17] T. Hong, S.C. Taylor-Lange, S. D’Oca, D. Yan, S.P. Corgnati, Advances in research and
4 applications of energy-related occupant behavior in buildings, *Energy and Buildings*. 116
5 (2016) 694–702. <https://doi.org/10.1016/j.enbuild.2015.11.052>.
- 6 [18] F. Stazi, F. Naspi, M. D’Orazio, A literature review on driving factors and contextual
7 events influencing occupants’ behaviours in buildings, *Building and Environment*. 118
8 (2017) 40–66. <https://doi.org/10.1016/j.buildenv.2017.03.021>.
- 9 [19] K. Van Den Wymelenberg, Patterns of occupant interaction with window blinds: A
10 literature review, *Energy and Buildings*. 51 (2012) 165–176.
11 <https://doi.org/10.1016/j.enbuild.2012.05.008>.
- 12 [20] S. Torresin, G. Pernigotto, F. Cappelletti, A. Gasparella, Combined effects of
13 environmental factors on human perception and objective performance: A review of
14 experimental laboratory works, *Indoor Air*. 28 (2018) 525–538.
15 <https://doi.org/10.1111/ina.12457>.
- 16 [21] V. Candas, A. Dufour, Thermal Comfort: Multisensory Interactions?, *Journal of*
17 *PHYSIOLOGICAL ANTHROPOLOGY and Applied Human Science*. 24 (2005) 33–36.
18 <https://doi.org/10.2114/jpa.24.33>.
- 19 [22] L.H. Centnerová, A.C. Boerstra, Comfort is more than just thermal comfort, *Adapting to*
20 *Change: New Thinking on Comfort*. (2010) 9–11.
21 <http://nceub.commoncense.info/uploads/26-01-06-Centnerova.pdf>.
- 22 [23] M. Frontczak, P. Wargocki, Literature survey on how different factors influence human
23 comfort in indoor environments, *Building and Environment*. 46 (2011) 922–937.
24 <https://doi.org/10.1016/j.buildenv.2010.10.021>.
- 25 [24] W. O’Brien, H.B. Gunay, F. Tahmasebi, A. Mahdavi, A preliminary study of representing
26 the inter-occupant diversity in occupant modelling, *Journal of Building Performance*
27 *Simulation*. 10 (2017) 509–526. <https://doi.org/10.1080/19401493.2016.1261943>.
- 28 [25] D. Moher, A. Liberati, J. Tetzlaff, D.G. Altman, T.P.R.I.S.M.A. Group, Preferred Reporting
29 Items for Systematic Reviews and Meta-Analyses: The PRISMA Statement, *PLOS Medicine*. 6
30 (2009) 1–6. <https://doi.org/10.1371/journal.pmed.1000097>.
- 31 [26] M.J. Grant, A. Booth, A typology of reviews: an analysis of 14 review types and
32 associated methodologies, *Health Information & Libraries Journal*. 26 (2009) 91–108.
33 <https://doi.org/10.1111/j.1471-1842.2009.00848.x>.
- 34 [27] M. Frontczak, S. Schiavon, J. Goins, E. Arens, H. Zhang, P. Wargocki, Quantitative
35 relationships between occupant satisfaction and satisfaction aspects of indoor
36 environmental quality and building design., *Indoor Air*. 22 (2012) 119–31.
37 <https://doi.org/10.1111/j.1600-0668.2011.00745.x>.

- 1 [28] C. Huizenga, S. Abbaszadeh, L. Zagreus, E. Arens, Air Quality and Thermal Comfort in
2 Office Buildings: Results of a Large Indoor Environmental Quality Survey, 2006.
3 <http://cbe.berkeley.edu>.
- 4 [29] A. Roetzel, M. DeKay, A. Nakai Kidd, A. Klas, A.-M. Sadick, V. Whitem, L. Zinkiewicz,
5 Architectural, Indoor Environmental, Personal And Cultural Influences On Students'
6 Selection Of A Preferred Place To Study, Architectural Science Review. (2019).
7 <https://mc.manuscriptcentral.com/asre>.
- 8 [30] R. Hitchings, G. Waitt, K. Roggeveen, C. Chisholm, Winter cold in a summer place:
9 Perceived norms of seasonal adaptation and cultures of home heating in Australia, Energy
10 Research and Social Science. 8 (2015) 162–172.
11 <https://doi.org/10.1016/j.erss.2015.05.007>.
- 12 [31] V.M. Barthelmes, Y. Heo, V. Fabi, S.P. Corgnati, Exploration of the Bayesian Network
13 framework for modelling window control behaviour, Building and Environment. 126
14 (2017) 318–330. <https://doi.org/10.1016/j.buildenv.2017.10.011>.
- 15 [32] F. Albers, J. Maier, C. Marggraf-Micheel, In search of evidence for the hue-heat
16 hypothesis in the aircraft cabin, Lighting Research and Technology. 47 (2014) 483–494.
17 <https://doi.org/10.1177/1477153514546784>.
- 18 [33] C.J. Anumba, Y. Abraham, Z. Zhao, S. Asadi, Innovations for Wellbeing Occupant-Related
19 Energy Use: a Qatar Office Case Study, in: World Sustainable Built Environment Conference
20 2017 Hong Kong, 2017.
- 21 [34] H. Azmoon, H. Dehghan, J. Akbari, S. Souri, The Relationship between Thermal Comfort
22 and Light Intensity with Sleep Quality and Eye Tiredness in Shift Work Nurses, Journal of
23 Environmental and Public Health. 2013 (2013) 1–5.
24 <https://doi.org/10.1155/2013/639184>.
- 25 [35] I. Balazova, G. Clausen, D.P. Wyon, The influence of exposure to multiple indoor
26 environmental parameters on human perception, performance and motivation, Clima 2007
27 WellBeing Indoors. (2007).
- 28 [36] R.R. Baniya, E. Tetri, J. Virtanen, L. Halonen, The effect of correlated colour temperature
29 of lighting on thermal sensation and thermal comfort in a simulated indoor workplace,
30 Indoor and Built Environment. 27 (2018) 308–316.
31 <https://doi.org/10.1177/1420326X16673214>.
- 32 [37] C.A. Bennett, P. Rey, What's So Hot About Red?, Human Factors. 14 (1972) 149–154.
- 33 [38] P.C. Berry, Effect of colored illumination upon perceived temperature 1, 1961.
- 34 [39] G. Chinazzo, J. Wienold, M. Andersen, Combined effects of daylight transmitted through
35 coloured glazing and indoor temperature on thermal responses and overall comfort,
36 Building and Environment. (2018). <https://doi.org/10.1016/j.buildenv.2018.08.045>.
- 37 [40] G. Clausen, D.P. Wyon, The Combined Effects of Many Different Indoor Environmental
38 Factors on Acceptability and Office Work Performance, HVAC&R Research. 14 (2008) 103–
39 113. <https://doi.org/10.1080/10789669.2008.10390996>.

- 1 [41] G. Clausen, L. Carrick, P.O. Fanger, S.W. Kim, T. Poulsen, J.H. Rindel, A comparative
2 study of discomfort caused by indoor air pollution, thermal load and noise, *Indoor Air*. 3
3 (1993) 255–262.
- 4 [42] N.D. Dahlan, Perceptive-cognitive aspects investigation in relation to indoor
5 environment satisfaction collected from naturally ventilated multi-storey student
6 accommodations in Malaysia, *Indoor and Built Environment*. 24 (2015) 116–127.
7 <https://doi.org/10.1177/1420326X13506449>.
- 8 [43] V. Fabi, S.P. Corgnati, R.V. Andersen, M. Filippi, B. Olesen, Effect of occupant behaviour
9 related influencing factors on final energy end uses in buildings, *Journal of Chemical*
10 *Information and Modeling*. 53 (2013) 1689–1699.
11 <https://doi.org/10.1017/CB09781107415324.004>.
- 12 [44] L. Fang, G. Clausen, P.O. Fanger, Impact of Temperature and Humidity on Perception of
13 Indoor Air Quality During Immediate and Longer Whole-Body Exposures, *Indoor Air*. 8
14 (1998) 276–284. <https://doi.org/10.1111/j.1600-0668.1998.00008.x>.
- 15 [45] P.O. Fanger, N.O. Breum, E. Jerking, Can colour and noise influence man's thermal
16 comfort?, *Ergonomics*. 20 (1977) 11–18. <https://doi.org/10.1080/00140137708931596>.
- 17 [46] S. Gauthier, G. Giakoumis, L. Bourikas, G.M. Giakoumis, P. James, Understanding
18 window behaviour in a mixed-mode buildings and the impact on energy performance,
19 2016.
- 20 [47] Y. Geng, W. Ji, B. Lin, Y. Zhu, The impact of thermal environment on occupant IEQ
21 perception and productivity, *Building and Environment*. 121 (2017) 158–167.
22 <https://doi.org/10.1016/j.buildenv.2017.05.022>.
- 23 [48] L. Huang, Y. Zhu, Q. Ouyang, B. Cao, A study on the effects of thermal, luminous, and
24 acoustic environments on indoor environmental comfort in offices, *Building and*
25 *Environment*. 49 (2012) 304–309.
26 <https://doi.org/https://doi.org/10.1016/j.buildenv.2011.07.022>.
- 27 [49] A. Jamrozik, C. Ramos, J. Zhao, J. Bernau, N. Clements, T. Vetting Wolf, B. Bauer, A novel
28 methodology to realistically monitor office occupant reactions and environmental
29 conditions using a living lab, *Building and Environment*. (2018).
30 <https://doi.org/10.1016/j.buildenv.2017.12.024>.
- 31 [50] A.C.K. Lai, K.W. Mui, L.T. Wong, L.Y. Law, An evaluation model for indoor environmental
32 quality (IEQ) acceptance in residential buildings, *Energy and Buildings*. 41 (2009) 930–936.
33 <https://doi.org/10.1016/j.enbuild.2009.03.016>.
- 34 [51] L. Lan, P. Wargocki, D.P. Wyon, Z. Lian, Effects of thermal discomfort in an office on
35 perceived air quality, SBS symptoms, physiological responses, and human performance,
36 *Indoor Air*. 21 (2011) 376–390. <https://doi.org/10.1111/j.1600-0668.2011.00714.x>.
- 37 [52] C. Laurentin, V. Bermtto, M. Fontoynt, Effect of thermal conditions and light source
38 type on visual comfort appraisal, *Lighting Research & Technology*. 32 (2000) 223–233.
39 <https://doi.org/10.1177/096032710003200406>.

- 1 [53] M.C. Lee, K.W. Mui, L.T. Wong, W.Y. Chan, E.W.M. Lee, C.T. Cheung, Student learning
2 performance and indoor environmental quality (IEQ) in air-conditioned university teaching
3 rooms., *Building and Environment*. 49 (2012) 238–244.
- 4 [54] F. Martellotta, A. Simone, S. Della Crociata, M. D’Alba, Global comfort and indoor
5 environment quality attributes for workers of a hypermarket in Southern Italy, *Building
6 and Environment*. 95 (2016) 355–364. <https://doi.org/10.1016/j.buildenv.2015.09.029>.
- 7 [55] L. Mølhave, Z. Liu, A.H. Jørgensen, O.F. Pedersen, S.K. Kjægaard, Sensory And
8 Physiological Effects On Humans Of Combined Exposures To Air Temperatures And Volatile
9 Organic Compounds, *Indoor Air*. 3 (1993) 155–169. [https://doi.org/10.1111/j.1600-
10 0668.1993.t01-1-00002.x](https://doi.org/10.1111/j.1600-0668.1993.t01-1-00002.x).
- 11 [56] K. Nagano, T. Horikoshi, New comfort index during combined conditions of moderate
12 low ambient temperature and traffic noise, *Energy and Buildings*. 37 (2005) 287–294.
13 <https://doi.org/10.1016/j.enbuild.2004.08.001>.
- 14 [57] Nagano K, Horikoshi T, New index of combined effect of temperature and noise on
15 human comfort: summer experiments on hot ambient temperature and traffic noise,
16 *Archives of Complex Environmental Studies*, 13 (2001).
- 17 [58] H. Nakamura, M. Oki, Influence of Air Temperature on Preference for Color
18 Temperature of General Lighting in the Room, *Journal of the Human-Environment System*. 4
19 (2000) 41–47. <https://doi.org/10.1618/jhes.4.41>.
- 20 [59] G. Newsham, S. Mancini, J. Veitch, R. Marchand, W. Lei, K. Charles, C. Arsenault, Control
21 strategies for lighting and ventilation in offices: Effects on energy and occupants, *Intelligent
22 Buildings International*. 1 (2009) 101–121. <https://doi.org/10.3763/inbi.2009.0004>.
- 23 [60] P.S. Nimlyat, Indoor environmental quality performance and occupants’ satisfaction
24 [IEQPOS] as assessment criteria for green healthcare building rating, *Building and
25 Environment*. 144 (2018) 598–610. <https://doi.org/10.1016/j.buildenv.2018.09.003>.
- 26 [61] N. Pellerin, V. Candas, Effects of steady-state noise and temperature conditions on
27 environmental perception and acceptability, *Indoor Air*. 14 (2004) 129–136.
28 <https://doi.org/10.1046/j.1600-0668.2003.00221.x>.
- 29 [62] P. Ricciardi, C. Buratti, Environmental quality of university classrooms: Subjective and
30 objective evaluation of the thermal, acoustic, and lighting comfort conditions, *Building and
31 Environment*. 127 (2018) 23–36.
- 32 [63] M. Te Kulve, L. Schellen, L. Schlangen, A. Frijns, W. Van, M. Lichtenbelt, Light intensity
33 and thermal responses, *Proceedings of Windsor conference*, 2016. <http://nceub.org.uk>.
- 34 [64] M. Te Kulve, L. Schlangen, W. van Marken Lichtenbelt, Interactions between the
35 perception of light and temperature, *Indoor Air*. 28 (2018) 881–891.
36 <https://doi.org/10.1111/ina.12500>.
- 37 [65] Y. Teramoto, H. Tokura, K. Ohkura, Y. Ohmasa, S. Suho, R. Inoshiri, M. Masuda, Effects of
38 different light intensities during the forenoon on the afternoon thermal sensation in mild

- 1 cold, *Journal of Thermal Biology*. 21 (1996) 339–343. [https://doi.org/10.1016/S0306-4565\(96\)00019-8](https://doi.org/10.1016/S0306-4565(96)00019-8).
- 2
- 3 [66] D. Tiller, L.M. Wang, A. Musser, M.J. Radik, Combined Effects of Noise and Temperature
4 on Human Comfort and Performance, *ASHRAE Transactions*. 116 (2010) 522–540.
- 5 [67] J. Toftum, A. Thorseth, J. Markqvart, Á. Logadóttir, Occupant response to different
6 correlated colour temperatures of white LED lighting, *Building and Environment*. 143
7 (2018) 258–268. <https://doi.org/10.1016/j.buildenv.2018.07.013>.
- 8 [68] J. Varjo, V. Hongisto, A. Haapakangas, H. Maula, H. Koskela, J. Hyönä, Simultaneous
9 effects of irrelevant speech, temperature and ventilation rate on performance and
10 satisfaction in open-plan offices, *Journal of Environmental Psychology*. 44 (2015) 16–33.
11 <https://doi.org/10.1016/j.jenvp.2015.08.001>.
- 12 [69] J. Winzen, F. Albers, C. Marggraf-Micheel, The influence of coloured light in the aircraft
13 cabin on passenger thermal comfort, *Lighting Research and Technology*. 46 (2014) 465–
14 475. <https://doi.org/10.1177/1477153513484028>.
- 15 [70] T. Witterseh, D.P. Wyon, G. Clausen, The effects of moderate heat stress and open-plan
16 office noise distraction on SBS symptoms and on the performance of office work, *Indoor Air*.
17 14 (2004) 30–40. <https://doi.org/10.1111/j.1600-0668.2004.00305.x>.
- 18 [71] L.T. Wong, K.W. Mui, P.S. Hui, A multivariate-logistic model for acceptance of indoor
19 environmental quality (IEQ) in offices, *Building and Environment*. 43 (2008) 1–6.
- 20 [72] P. Xue, C. Mak, Z. Ai, A structured approach to overall environmental satisfaction in
21 high-rise residential buildings, *Energy and Buildings*. 116 (2016) 181–189.
- 22 [73] K. Yamazaki, S. Nomoto, Y. Yokota, T. Murai, The effects of temperature, light, and
23 sound on perceived work environment, *ASHRAE Transactions*. 104 (1998) 711.
- 24 [74] Yang, Moon, Jeon, Comparison of Response Scales as Measures of Indoor
25 Environmental Perception in Combined Thermal and Acoustic Conditions, *Sustainability*. 11
26 (2019) 3975. <https://doi.org/10.3390/su11143975>.
- 27 [75] W. Yang, H.J. Moon, Cross-modal effects of illuminance and room temperature on
28 indoor environmental perception, *Building and Environment*. 146 (2018) 280–288.
29 <https://doi.org/10.1016/j.buildenv.2018.10.007>.
- 30 [76] W. Yang, H.J. Moon, M.J. Kim, Combined effects of short-term noise exposure and
31 hygrothermal conditions on indoor environmental perceptions, *Indoor and Built
32 Environment*. 27 (2018) 1119–1133. <https://doi.org/10.1177/1420326X17703774>.
- 33 [77] W. Yang, M.J. Kim, H.J. Moon, Effects of indoor temperature and background noise on
34 floor impact noise perception, *Indoor and Built Environment*. 28 (2019) 454–469.
35 <https://doi.org/10.1177/1420326X17753708>.
- 36 [78] M.S. Andargie, E. Azar, An applied framework to evaluate the impact of indoor office
37 environmental factors on occupants' comfort and working conditions, *Sustainable Cities
38 and Society*. 46 (2019) 101447. <https://doi.org/10.1016/j.scs.2019.101447>.

- 1 [79] W. Yang, H.J. Moon, Combined effects of acoustic, thermal, and illumination conditions
2 on the comfort of discrete senses and overall indoor environment, *Building and*
3 *Environment*. 148 (2019) 623–633. <https://doi.org/10.1016/j.buildenv.2018.11.040>.
- 4 [80] S.G. Hodder, K. Parsons, The effects of solar radiation on thermal comfort, *International*
5 *Journal of Biometeorology*. 51 (2007) 233–250. [https://doi.org/10.1007/s00484-006-](https://doi.org/10.1007/s00484-006-0050-y)
6 [0050-y](https://doi.org/10.1007/s00484-006-0050-y).
- 7 [81] W. Yang, H.J. Moon, Combined effects of sound and illuminance on indoor
8 environmental perception, *Applied Acoustics*. 141 (2018) 136–143.
9 <https://doi.org/10.1016/j.apacoust.2018.07.008>.
- 10 [82] S. Gauthier, ; B. Liu, ; G. Huebner, ; D. Shipworth, Investigating the effect of CO2
11 concentration on reported thermal comfort, in: *Proceedings of CISBAT 2015 International*
12 *Conference on Future Buildings and Districts*, 2015.
- 13 [83] Z. Pan, S.K. Kjaergaard, L. Mølhøve, A chamber-experiment investigation of the
14 interaction between perceptions of noise and odor in humans, *International Archives of*
15 *Occupational and Environmental Health*. 76 (2003) 598–604.
16 <https://doi.org/10.1007/s00420-003-0464-3>.
- 17 [84] E. Siekierski, V. Roussarie, S. Viollon, S. Ségrétain, S. Bojago, What's so hot about
18 sound?-influence of HVAC sounds on thermal comfort, in: *Proceedings of INTERNOISE*
19 *2005*, 2005. <https://www.researchgate.net/publication/288628328>.
- 20 [85] H. Ma, W. Nie, Influence of visual factors on noise annoyance evaluation caused by road
21 traffic noise in indoor environment, in: *Inter Noise 2014*, Melbourne, Australia, 2014.
- 22 [86] I. Golasi, F. Salata, E.de L. Vollaro, A. Peña-García, Influence of lighting colour
23 temperature on indoor thermal perception: A strategy to save energy from the HVAC
24 installations, *Energy and Buildings*. 185 (2019) 112–122.
25 <https://doi.org/https://doi.org/10.1016/j.enbuild.2018.12.026>.
- 26 [87] H. Wang, G. Liu, S. Hu, C. Liu, Experimental investigation about thermal effect of colour
27 on thermal sensation and comfort, *Energy and Buildings*. 173 (2018) 710–718.
28 <https://doi.org/https://doi.org/10.1016/j.enbuild.2018.06.008>.
- 29 [88] H.N. Ho, D. Iwai, Y. Yoshikawa, J. Watanabe, S.Y. Nishida, Combined effects of sound and
30 illuminance on indoor environmental perception, *Applied Acoustics*. 141 (2018) 163–143.
31 <https://doi.org/10.1016/j.apacoust.2018.07.008>.
- 32 [89] N. Matsubara, A. Gassho, Y. Kurazumi, Facilitatory Effects of Environmental Sounds on
33 Hue-heat Phenomena, *The International Conference on Acoustics*. (2004) 1775–1778.
- 34 [90] M. Ziat, C.A. Balcer, A. Shirtz, T. Rolison, A century later, the hue-heat hypothesis: Does
35 color truly affect temperature perception?, in: *Lecture Notes in Computer Science*
36 *(Including Subseries Lecture Notes in Artificial Intelligence and Lecture Notes in*
37 *Bioinformatics)*, 2016. https://doi.org/10.1007/978-3-319-42321-0_25.

- 1 [91] H. Tang, Y. Ding, B. Singer, Interactions and comprehensive effect of indoor
2 environmental quality factors on occupant satisfaction, *Building and Environment*. 167
3 (2019) 106462. <https://doi.org/10.1016/j.buildenv.2019.106462>.
- 4 [92] F. Haldi, D. Robinson, On the unification of thermal perception and adaptive actions,
5 *Building and Environment*. 45 (2010) 2440–2457.
6 <https://doi.org/10.1016/j.buildenv.2010.05.010>.
- 7 [93] B. Cao, Q. Ouyang, Y. Zhu, L. Huang, H. Hu, G. Deng, Development of a multivariate
8 regression model for overall satisfaction in public buildings based on field studies in Beijing
9 and Shanghai, *Building and Environment*. 47 (2012) 394–399.
10 <https://doi.org/10.1016/j.buildenv.2011.06.022>.
- 11 [94] T. Mihai, V. Iordache, Determining the Indoor Environment Quality for an Educational
12 Building, in: *Energy Procedia*, Elsevier Ltd, 2016: pp. 566–574.
13 <https://doi.org/10.1016/j.egypro.2015.12.246>.
- 14 [95] L. Pronk, The combined effects of temperature, background noise and lighting on the
15 non-physical task performance of university students, (2008).
- 16 [96] K. Nagano, T. Horikoshi, Development of Equi-comfort Charts Constituted with
17 Temperature and Noise at 150 and 3 lx, *Proceedings of Indoor Air*. (2014).
- 18 [97] S.C. Sekhar, S.E. Goh, Thermal comfort and IAQ characteristics of
19 naturally/mechanically ventilated and air-conditioned bedrooms in a hot and humid
20 climate, *Building and Environment*. 46 (2011) 1905–1916.
21 <https://doi.org/https://doi.org/10.1016/j.buildenv.2011.03.012>.
- 22 [98] C.-M. Chiang, C.-M. Lai, A study on the comprehensive indicator of indoor environment
23 assessment for occupants' health in Taiwan, *Building and Environment*. 37 (2002) 387–
24 392. [https://doi.org/https://doi.org/10.1016/S0360-1323\(01\)00034-8](https://doi.org/https://doi.org/10.1016/S0360-1323(01)00034-8).
- 25 [99] M. Ncube, S. Riffat, Developing an indoor environment quality tool for assessment of
26 mechanically ventilated office buildings in the UK – A preliminary study, *Building and*
27 *Environment*. 53 (2012) 26–33.
28 <https://doi.org/https://doi.org/10.1016/j.buildenv.2012.01.003>.
- 29 [100] F. Fassio, A. Fanchiotti, R.D.L. Vollaro, Linear, Non-Linear and Alternative Algorithms
30 in the Correlation of IEQ Factors with Global Comfort: A Case Study, *Sustainability*. 6 (2014)
31 8113–8127.
- 32 [101] A.A. Hettiarachchi, R. Emmanuel, Colour as a psychological agent to manipulate
33 perceived indoor thermal environment for effective energy usage; cases implemented in Sri
34 Lanka, in: *PLEA 2017 Edinburgh*, 2017.
- 35 [102] G. Chinazzo, J. Wienold, M. Andersen, Variation in thermal, visual and overall comfort
36 evaluation under coloured glazing at different temperature levels, *Journal of the*
37 *International Colour Association*. (2019) 45–54. [http://www.aic-](http://www.aic-colour.org/journal.htm)
38 [colour.org/journal.htm](http://www.aic-color.org/journal.htm)

- 1 [103] G. Chinazzo, J. Wienold, M. Andersen, Daylight affects human thermal perception,
2 Scientific Reports. 9 (2019) 13690. <https://doi.org/10.1038/s41598-019-48963-y>.
- 3 [104] M. te Kulve, L. Schellen, L.J.M. Schlangen, W.D. van Marken Lichtenbelt, The influence
4 of light on thermal responses, Acta Physiologica. 216 (2016) 163–185.
5 <https://doi.org/10.1111/apha.12552>.
- 6 [105] C. Buratti, E. Belloni, F. Merli, P. Ricciardi, A new index combining thermal, acoustic,
7 and visual comfort of moderate environments in temperate climates, Building and
8 Environment. 139 (2018) 27–37. <https://doi.org/10.1016/j.buildenv.2018.04.038>.
- 9 [106] G. Chinazzo, L. Pastore, J. Wienold, M. Andersen, A field study investigation on the
10 influence of light level on subjective thermal perception in different seasons, Windsor
11 Conference. Rethinking Comfort. (2018).
- 12 [107] N. Pellerin, V. Candas, Combined effects of temperature and noise on human
13 discomfort, Physiology and Behavior. 78 (2003) 99–106.
- 14 [108] W. Yang, H.J. Moon, Cross-modal effects of noise and thermal conditions on indoor
15 environmental perception and speech recognition, Applied Acoustics. 141 (2018) 1–8.
16 <https://doi.org/10.1016/j.apacoust.2018.06.019>.
- 17 [109] W. Yang, H.J. Moon, Effects of recorded water sounds on intrusive traffic noise
18 perception under three indoor temperatures, Applied Acoustics. 145 (2019) 234–244.
19 <https://doi.org/10.1016/j.apacoust.2018.10.015>.
- 20 [110] G. Diaper, The Hawthorne Effect: a fresh examination, Educational Studies. 16 (1990)
21 261–267. <https://doi.org/10.1080/0305569900160305>.
- 22 [114] H.M. Parsons, What Happened at Hawthorne?, Science. 183 (1974) 922 LP – 932.
23 <https://doi.org/10.1126/science.183.4128.922>.
- 24 [112] N. Baker, M. Standeven, A behavioural approach to thermal comfort assessment,
25 International Journal of Solar Energy. 19 (1997) 21–35.
26 <https://doi.org/10.1080/01425919708914329>.
- 27 [113] I. Balazova, G. Clausen, J.H. Rindel, T.T. Poulsen, D.P. Wyon, Open-plan office
28 environments: A laboratory experiment to examine the effect of office noise and
29 temperature on human perception, comfort and office work performance, (2008).
30 <https://www.semanticscholar.org/paper/Open-plan-office-environments{%}3A-A-laboratory-to-the-Balazova-Clausen/10cb448cac558b19a1fa18d052de16cce79141fe>.
- 32 [114] D. Blankenberger, K. Van Den Wymelenberg, J. Stenson, Visual effects of wood on
33 thermal perception of interior environments, in: ARCC Conference Repository, 2019.
34 <https://www.arcc-journal.org/index.php/repository/article/view/619>.
- 35 [115] P.R. Boyce, N.H. Eklund, S.N. Simpson, Individual lighting control: Task performance,
36 mood, and illuminance, Journal of the Illuminating Engineering Society. 29 (2000) 131–142.
37 <https://doi.org/10.1080/00994480.2000.10748488>.

- 1 [116] Z. Brown, R.J. Cole, Influence of occupants' knowledge on comfort expectations and
2 behaviour, *Building Research & Information*. 37 (2009) 227–245.
3 <https://doi.org/10.1080/09613210902794135>.
- 4 [117] V. Butala, S. Muhič, Perception of air quality and the thermal environment in offices,
5 *Indoor and Built Environment*. 16 (2007) 302–310.
6 <https://doi.org/10.1177/1420326X06079886>.
- 7 [118] V.L. Castaldo, I. Pigliautile, F. Rosso, F. Cotana, F. De Giorgio, A.L. Pisello, How
8 subjective and non-physical parameters affect occupants' environmental comfort
9 perception, *Energy and Buildings*. 178 (2018) 107–129.
10 <https://doi.org/10.1016/j.enbuild.2018.08.020>.
- 11 [119] J.H. Choi, J. Moon, Impacts of human and spatial factors on user satisfaction in office
12 environments, *Building and Environment*. 114 (2017) 23–35.
13 <https://doi.org/10.1016/j.buildenv.2016.12.003>.
- 14 [120] S.P. Corgnati, M. Filippi, S. Viazzo, Perception of the thermal environment in high
15 school and university classrooms: Subjective preferences and thermal comfort, *Building
16 and Environment*. 42 (2007) 951–959. <https://doi.org/10.1016/j.buildenv.2005.10.027>.
- 17 [121] N.D. Dahlan, P.J. Jones, D.K. Alexander, E. Salleh, J. Alias, Evidence base prioritisation
18 of indoor comfort perceptions in Malaysian typical multi-storey hostels, *Building and
19 Environment*. 44 (2009) 2158–2165. <https://doi.org/10.1016/j.buildenv.2009.03.010>.
- 20 [122] R. de Dear, J. Kim, T. Parkinson, Residential adaptive comfort in a humid subtropical
21 climate—Sydney Australia, *Energy and Buildings*. 158 (2018) 1296–1305.
22 <https://doi.org/10.1016/j.enbuild.2017.11.028>.
- 23 [123] V. De Giuli, R. Zecchin, L. Corain, L. Salmaso, Measurements of indoor environmental
24 conditions in Italian classrooms and their impact on childrens comfort, *Indoor and Built
25 Environment*. 24 (2015) 689–712. <https://doi.org/10.1177/1420326X14530586>.
- 26 [124] S. Dhaka, J. Mathur, A. Wagner, G.D. Agarwal, V. Garg, Evaluation of thermal
27 environmental conditions and thermal perception at naturally ventilated hostels of
28 undergraduate students in composite climate, *Building and Environment*. 66 (2013) 42–53.
29 <https://doi.org/10.1016/J.BUILDENV.2013.04.015>.
- 30 [125] K. Freihoefer, D. Guerin, C. Martin, H.Y. Kim, J.K. Brigham, Occupants' satisfaction with,
31 and physical readings of, thermal, acoustic, and lighting conditions of sustainable office
32 workspaces, *Indoor and Built Environment*. 24 (2015) 457–472.
33 <https://doi.org/10.1177/1420326X13514595>.
- 34 [126] J.Y. Garretón, R. Rodriguez, A. Pattini, Effects of perceived indoor temperature on
35 daylight glare perception, *Building Research and Information*. 44 (2016) 907–919.
36 <https://doi.org/10.1080/09613218.2016.1103116>.
- 37 [127] Z. Gou, S.S.Y. Lau, Z. Zhang, A comparison of indoor environmental satisfaction
38 between two green buildings and a conventional building in China, *Journal of Green
39 Building*. 7 (2012) 89–104. <https://doi.org/10.3992/jgb.7.2.89>.

- 1 [128] Z. Gou, D. Prasad, S. Siu-Yu Lau, Are green buildings more satisfactory and
2 comfortable?, *Habitat International*. 39 (2013) 156–161.
3 <https://doi.org/10.1016/j.habitatint.2012.12.007>.
- 4 [129] M.A. Humphreys, Quantifying occupant comfort: are combined indices of the indoor
5 environment practicable?, *Building Research & Information*. 33 (2005) 317–325.
6 <https://doi.org/10.1080/09613210500161950>.
- 7 [130] S. Karjalainen, Thermal comfort and use of thermostats in Finnish homes and offices,
8 *Building and Environment*. 44 (2009) 1237–1245.
9 <https://doi.org/10.1016/j.buildenv.2008.09.002>.
- 10 [131] J. Kim, R. De Dear, Impact of different building ventilation modes on occupant
11 expectations of the main IEQ factors, *Building and Environment*. 57 (2012) 184–193.
12 <https://doi.org/10.1016/j.buildenv.2012.05.003>.
- 13 [132] D.H. Kim, K.P. Mansfield, A cross-cultural study on perceived lighting quality and
14 occupants' well-being between UK and South Korea, *Energy and Buildings*. 119 (2016) 211–
15 217. <https://doi.org/10.1016/j.enbuild.2016.03.033>.
- 16 [133] Z. Kong, D.M. Utzinger, K. Freihoefer, T. Steege, The impact of interior design on visual
17 discomfort reduction: A field study integrating lighting environments with POE survey,
18 *Building and Environment*. 138 (2018) 135–148.
19 <https://doi.org/10.1016/j.buildenv.2018.04.025>.
- 20 [134] P. Kosmopoulos, D. Galanos, D. Anastaselos, A.M. Papadopoulos, An assessment of the
21 overall comfort sensation in workplaces, *International Journal of Ventilation*. 10 (2012)
22 311–322. <https://doi.org/10.1080/14733315.2012.11683958>.
- 23 [135] Y.S. Lee, D.A. Guerin, Indoor Environmental Quality Related to Occupant Satisfaction
24 and Performance in LEED-certified Buildings, *Indoor and Built Environment*. 18 (2009)
25 293–300. <https://doi.org/10.1177/1420326X09105455>.
- 26 [136] H.H. Liang, C.P. Chen, R.L. Hwang, W.M. Shih, S.C. Lo, H.Y. Liao, Satisfaction of
27 occupants toward indoor environment quality of certified green office buildings in Taiwan,
28 *Building and Environment*. 72 (2014) 232–242.
29 <https://doi.org/10.1016/j.buildenv.2013.11.007>.
- 30 [137] H. Lou, D. Ou, A comparative field study of indoor environmental quality in two types
31 of open-plan offices: Open-plan administrative offices and open-plan research offices,
32 *Building and Environment*. 148 (2019) 394–404.
33 <https://doi.org/10.1016/j.buildenv.2018.11.022>.
- 34 [138] G. Liu, C. Cen, Q. Zhang, K. Liu, R. Dang, Field study on thermal comfort of passenger at
35 high-speed railway station in transition season, *Building and Environment*. 108 (2016)
36 220–229. <https://doi.org/10.1016/j.buildenv.2016.09.003>.
- 37 [139] G. Mangone, S.R. Kurvers, P.G. Luscuere, Constructing thermal comfort: Investigating
38 the effect of vegetation on indoor thermal comfort through a four season thermal comfort

- 1 quasi-experiment, *Building and Environment*. 81 (2014) 410–426.
2 <https://doi.org/10.1016/j.buildenv.2014.07.019>.
- 3 [140] S. Manu, Y. Shukla, R. Rawal, L.E. Thomas, R. de Dear, Field studies of thermal comfort
4 across multiple climate zones for the subcontinent: India Model for Adaptive Comfort
5 (IMAC), *Building and Environment*. 98 (2016) 55–70.
6 <https://doi.org/10.1016/j.buildenv.2015.12.019>.
- 7 [141] Q. Meng, J. Kang, H. Jin, Field study on the influence of spatial and environmental
8 characteristics on the evaluation of subjective loudness and acoustic comfort in
9 underground shopping streets, *Applied Acoustics*. 74 (2013) 1001–1009.
10 <https://doi.org/10.1016/j.apacoust.2013.02.003>.
- 11 [142] Q. Meng, S. Zhang, J. Kang, Effects of typical dining styles on conversation behaviours
12 and acoustic perception in restaurants in China, *Building and Environment*. 121 (2017)
13 148–157. <https://doi.org/10.1016/J.BUILDENV.2017.05.025>.
- 14 [143] G. Motalebi, A. Sal Moslehian, E. Hasanzadeh, The most effective indoor
15 environmental quality factors related to worker satisfaction and performance: a case of the
16 administrative office building at Ferdowsi University of Mashhad, *International Journal of*
17 *Occupational Safety and Ergonomics*. (2019).
18 <https://doi.org/10.1080/10803548.2019.1582886>.
- 19 [144] G.R. Newsham, B.J. Birt, C. Arsenault, A.J.L. Thompson, J.A. Veitch, S. Mancini, A.D.
20 Galasiu, B.N. Gover, I.A. MacDonald, G.J. Burns, Do green buildings have better indoor
21 environments? New evidence, *Building Research and Information*. 41 (2013) 415–434.
22 <https://doi.org/10.1080/09613218.2013.789951>.
- 23 [145] Z. Pei, B. Lin, Y. Liu, Y. Zhu, Comparative study on the indoor environment quality of
24 green office buildings in China with a long-term field measurement and investigation,
25 *Building and Environment*. 84 (2015) 80–88.
26 <https://doi.org/10.1016/j.buildenv.2014.10.015>.
- 27 [146] Y. Sakurai, T. Noguchi, G. Horie, N. Matsubara, Quantification of the synthesized
28 evaluation of the combined environment, *Energy and Buildings*. 14 (1990) 169–173.
29 [https://doi.org/10.1016/0378-7788\(90\)90037-J](https://doi.org/10.1016/0378-7788(90)90037-J).
- 30 [147] E.(L.) Sander, A. Caza, P.J. Jordan, Psychological perceptions matter: Developing the
31 reactions to the physical work environment scale, *Building and Environment*. 148 (2019)
32 338–347. <https://doi.org/10.1016/j.buildenv.2018.11.020>.
- 33 [148] A. Wagner, E. Gossauer, C. Moosmann, T. Gropp, R. Leonhart, Thermal comfort and
34 workplace occupant satisfaction-Results of field studies in German low energy office
35 buildings, *Energy and Buildings*. 39 (2007) 758–769.
36 <https://doi.org/10.1016/j.enbuild.2007.02.013>.
- 37 [149] M. Watchman, A. Potvin, C.M.H. Demers, A post-occupancy evaluation of the influence
38 of wood on environmental comfort, *BioResources*. 12 (2017) 8704–8724.
39 <https://doi.org/10.15376/biores.12.4.8704-8724>.

1 [150] X. Xuan, Study of indoor environmental quality and occupant overall comfort and
2 productivity in LEED- and non-LEED-certified healthcare settings, *Indoor and Built*
3 *Environment*. 27 (2018) 544–560. <https://doi.org/10.1177/1420326X16684007>.

4 [151] K. Yildirim, A. Akalin-Baskaya, M. Celebi, The effects of window proximity, partition
5 height, and gender on perceptions of open-plan offices, *Journal of Environmental*
6 *Psychology*. 27 (2007) 154–165. <https://doi.org/10.1016/j.jenvp.2007.01.004>.

7 [152] A. Zalejska-Jonsson, M. Wilhelmsson, Impact of perceived indoor environment quality
8 on overall satisfaction in Swedish dwellings, *Building and Environment*. 63 (2013) 134–
9 144. <https://doi.org/10.1016/j.buildenv.2013.02.005>.

10 [153] A. Zalejska-Jonsson, Parameters contributing to occupants' satisfaction: Green and
11 conventional residential buildings, *Facilities*. 32 (2014) 411–437.
12 <https://doi.org/10.1108/F-03-2013-0021>.

13 [154] F.H. Rohles, W.V. Wells, Interior design. Comfort and Thermal sensitivity, *Journal of*
14 *Interior Design*. 2 (1976) 36–44. <https://doi.org/10.1111/j.1939-1668.1976.tb00392.x>.

15 [155] M. Stokkermans, I. Vogels, Y. de Kort, I. Heynderickx, Relation between the perceived
16 atmosphere of a lit environment and perceptual attributes of light, *Lighting Research and*
17 *Technology*. 50 (2018) 1164–1178. <https://doi.org/10.1177/1477153517722384>.

18 [156] R. Kelly, J. Mardaljevic, B. Painter, & K. Irvine, The Long-Term Evaluation of
19 Electrochromic Glazing in an Open Plan Office under Normal Use: Project Outline, in:
20 *Proceedings of Experiencing Light*, 2012.

21 [157] I.A. Sakellaris, D.E. Saraga, C. Mandin, C. Roda, S. Fossati, Y. De Kluizenaar, P. Carrer, S.
22 Dimitroulopoulou, V.G. Mihucz, T. Szigeti, O. Hänninen, E. De Oliveira Fernandes, J.G. Bartzis,
23 P.M. Bluysen, Perceived indoor environment and occupants' comfort in European
24 "Modern" office buildings: The OFFICAIR Study, *International Journal of Environmental*
25 *Research and Public Health*. 13 (2016). <https://doi.org/10.3390/ijerph13050444>.

26 [158] J. Kim, R. de Dear, Nonlinear relationships between individual IEQ factors and overall
27 workspace satisfaction, *Building and Environment*. 49 (2012) 33–40.
28 <https://doi.org/10.1016/j.buildenv.2011.09.022>.

29 [159] J.H. Choi, V. Loftness, A. Aziz, Post-occupancy evaluation of 20 office buildings as basis
30 for future IEQ standards and guidelines, in: *Energy and Buildings*, 2012: pp. 167–175.
31 <https://doi.org/10.1016/j.enbuild.2011.08.009>.

32 [160] S. Kumar, M.K. Singh, V. Loftness, J. Mathur, S. Mathur, Thermal comfort assessment
33 and characteristics of occupant's behaviour in naturally ventilated buildings in composite
34 climate of India, *Energy for Sustainable Development*. 33 (2016) 108–121.
35 <https://doi.org/10.1016/j.esd.2016.06.002>.

36 [161] I.E. Bennet, W. O'Brien, Field study of thermal comfort and occupant satisfaction in
37 Canadian condominiums, *Architectural Science Review*. 60 (2017) 27–39.
38 <https://doi.org/10.1080/00038628.2016.1205179>.

- 1 [162] A.K. Persily, Evaluating Building IAQ and Ventilation with Indoor Carbon Dioxide,
2 ASHRAE Transactions. 103 (1997) 1–12.
- 3 [163] K.W. Tham, H.C. Willem, Temperature and Ventilation Effects on Performance and
4 Neurobehavioral-Related Symptoms of Tropically Acclimatized Call Center Operators Near
5 Thermal Neutrality, ASHRAE Transactions. 111 (2005) 687–698.
- 6 [164] Wilson, M.; Nicol, F., Some Thoughts on Acoustic Comfort: a Look At Adaptive
7 Standards for Noise, in: Institute of Acoustics, 2003: pp. 116–124.
- 8 [165] R.W. Marans, X.-ying Yan, LIGHTING QUALITY AND ENVIRONMENTAL
9 SATISFACTION IN OPEN AND ENCLOSED OFFICES, Journal of Architectural and Planning
10 Research. 6 (1989) 118–131. <http://www.jstor.org/stable/43028916>.
- 11 [166] A. Astolfi, F. Pellerey, Subjective and objective assessment of acoustical and overall
12 environmental quality in secondary school classrooms, The Journal of the Acoustical Society
13 of America. 123 (2008) 163–173. <https://doi.org/10.1121/1.2816563>.
- 14 [167] J.F. Nicol, M.A. Humphreys, A Stochastic Approach to Thermal Comfort–Occupant
15 Behavior and Energy Use in Buildings, ASHRAE Transactions. 110 (2004) 554–568.
- 16 [168] G.J. Levermore, D. Meyers, Occupant questionnaire on interior environmental
17 conditions: Initial results, Building Services Engineering Research and Technology. 17
18 (1996) 29–36. <https://doi.org/10.1177/014362449601700105>.
- 19 [169] M. Boubekri, Appraisal of the Lighting Conditions in an Office Building: Results of a
20 Survey, Indoor Environment. 4 (1995) 162–169.
21 <https://doi.org/10.1177/1420326X9500400306>.
- 22 [170] J.A. Veitch, K.E. Charles, K.M.J. Farley, G.R. Newsham, A model of satisfaction with
23 open-plan office conditions: COPE field findings, Journal of Environmental Psychology. 27
24 (2007) 177–189. <https://doi.org/10.1016/j.jenvp.2007.04.002>.
- 25 [171] I.G. Monfared, S. Sharples, Occupants perceptions and expectations of a green office
26 building: A longitudinal case study, Architectural Science Review. 54 (2011) 344–355.
27 <https://doi.org/10.1080/00038628.2011.613636>.
- 28 [172] E.M. De Korte, M. Spiekman, L. Hoes-van Oeffelen, B. van der Zande, G. Vissenberg, G.
29 Huiskes, L.F.M. Kuijt-Evers, Personal environmental control: Effects of pre-set conditions
30 for heating and lighting on personal settings, task performance and comfort experience,
31 Building and Environment. 86 (2015) 166–176.
32 <https://doi.org/10.1016/j.buildenv.2015.01.002>.
- 33 [173] T. Moore, D.J. Carter, A. Slater, A study of opinion in offices with and without user
34 controlled lighting, Lighting Research and Technology. 36 (2004) 131–146.
35 <https://doi.org/10.1191/13657828041i109oa>.
- 36 [174] E.V. White, B. Gatersleben, Greenery on residential buildings: Does it affect
37 preferences and perceptions of beauty?, Journal of Environmental Psychology. 31 (2011)
38 89–98. <https://doi.org/10.1016/j.jenvp.2010.11.002>.

- 1 [175] I. Bennet, W. O'brien, H.B. Gunay, Effect of Window Blind Use in Residential Buildings:
2 Observation and Simulation Study, 2014.
- 3 [176] Y. Geng, J. Yu, B. Lin, Z. Wang, Y. Huang, Impact of individual IEQ factors on
4 passengers' overall satisfaction in Chinese airport terminals, Building and Environment.
5 112 (2017) 241–249. <https://doi.org/10.1016/j.buildenv.2016.11.040>.
- 6 [177] S. Leder, G.R. Newsham, J.A. Veitch, S. Mancini, K.E. Charles, Effects of office
7 environment on employee satisfaction: A new analysis, Building Research and Information.
8 44 (2016) 34–50. <https://doi.org/10.1080/09613218.2014.1003176>.
- 9 [178] J. Kim, T. Hong, J. Jeong, C. Koo, M. Kong, An integrated psychological response score
10 of the occupants based on their activities and the indoor environmental quality condition
11 changes, Building and Environment. 123 (2017) 66–77.
12 <https://doi.org/10.1016/j.buildenv.2017.06.046>.
- 13 [179] I.A. Raja, J.F. Nicol, K.J. McCartney, M.A. Humphreys, Thermal comfort: Use of controls
14 in naturally ventilated buildings, Energy and Buildings. 33 (2001) 235–244.
15 [https://doi.org/10.1016/S0378-7788\(00\)00087-6](https://doi.org/10.1016/S0378-7788(00)00087-6).
- 16 [180] K. Voss, S. Herkel, J. Pfafferott, G. Löhnert, A. Wagner, Energy efficient office buildings
17 with passive cooling - Results and experiences from a research and demonstration
18 programme, Solar Energy. 81 (2007) 424–434.
19 <https://doi.org/10.1016/j.solener.2006.04.008>.
- 20 [181] L. Chatzidiakou, D. Mumovic, A. Summerfield, Is CO2 a good proxy for indoor air
21 quality in classrooms? Part 2: Health outcomes and perceived indoor air quality in relation
22 to classroom exposure and building characteristics, Building Services Engineering Research
23 and Technology. 36 (2015) 162–181. <https://doi.org/10.1177/0143624414566245>.
- 24 [182] F.H. Rohles, W. Wells, The role of environmental antecedents on subsequent thermal
25 comfort, ASHRAE Transactions. 83 (1977) 21–29.
- 26 [183] Z. Yang, B. Becerik-Gerber, L. Mino, A study on student perceptions of higher
27 education classrooms: Impact of classroom attributes on student satisfaction and
28 performance, Building and Environment. 70 (2013) 171–188.
29 <https://doi.org/10.1016/J.BUILDENV.2013.08.030>.
- 30 [184] S. Ravindu, R. Rameezdeen, J. Zuo, Z. Zhou, R. Chandratilake, Indoor environment
31 quality of green buildings: Case study of an LEED platinum certified factory in a warm
32 humid tropical climate, Building and Environment. 84 (2015) 105–113.
33 <https://doi.org/10.1016/j.buildenv.2014.11.001>.
- 34 [185] J. Kim, Y. Zhou, S. Schiavon, P. Raftery, G. Brager, Personal comfort models: Predicting
35 individuals thermal preference using occupant heating and cooling behavior and machine
36 learning, Building and Environment. 129 (2018) 96–106.
37 <https://doi.org/10.1016/j.buildenv.2017.12.011>.
- 38 [186] L. Chatzidiakou, D. Mumovic, A. Summerfield, Is CO2 a good proxy for indoor air
39 quality in classrooms? Part 1: The interrelationships between thermal conditions CO2

- 1 levels, ventilation rates and selected indoor pollutants, *Building Services Engineering*
2 *Research and Technology*. 36 (2015) 129–161.
3 <https://doi.org/10.1177/0143624414566244>.
- 4 [187] C. Vásquez, F.E. Pino, A.P. Hoces, C. Aguirre Nuñez, Thermal and lighting perception in
5 four fully glazed office buildings in Santiago, Chile, *Journal of Facade Design and*
6 *Engineering*. 1 (2013) 31–51. <https://doi.org/10.3233/FDE-130007>.
- 7 [188] D.K. Serghides, C.K. Chatzinikola, M.C. Katafygiotou, Comparative studies of the
8 occupants' behaviour in a university building during winter and summer time, *International*
9 *Journal of Sustainable Energy*. 34 (2015) 528–551.
- 10 [189] V. De Giuli, R. Zecchin, L. Corain, L. Salmaso, Measured and perceived environmental
11 comfort: Field monitoring in an Italian school, *Applied Ergonomics*. 45 (2014) 1035–1047.
12 <https://doi.org/10.1016/j.apergo.2014.01.004>.
- 13 [190] G.K. Oral, A.K. Yener, N.T. Bayazit, Building envelope design with the objective to
14 ensure thermal, visual and acoustic comfort conditions, *Building and Environment*. 39
15 (2004) 281–287. [https://doi.org/10.1016/S0360-1323\(03\)00141-0](https://doi.org/10.1016/S0360-1323(03)00141-0).
- 16 [191] G.F. Menzies, J.R. Wherrett, Windows in the workplace: Examining issues of
17 environmental sustainability and occupant comfort in the selection of multi-glazed
18 windows, *Energy and Buildings*. 37 (2005) 623–630.
19 <https://doi.org/10.1016/j.enbuild.2004.09.012>.
- 20 [192] L. Karlsen, P. Heiselberg, I. Bryn, Occupant satisfaction with two blind control
21 strategies: Slats closed and slats in cut-off position, *Solar Energy*. 115 (2015) 166–179.
22 <https://doi.org/10.1016/j.solener.2015.02.031>.
- 23 [193] R. Dang, L. Wei, Y. Yuan, G. Liu, The impact of physical environments in satisfaction in
24 shopping centers, in: 7th International Building Physics Conference, IBPC2018, 2018: pp.
25 799–804. <https://doi.org/10.14305/ibpc.2018.ie-2.06>.
- 26 [194] I. Pigliautile, S. Casaccia, A. Calvaresi, N. Morresi, M. Arnesano, A.L. Pisello, G.M. Revel,
27 A comprehensive human comfort assessment protocol based on multidomain
28 measurements and surveys, in: 51st AiCARR International Conference The Human
29 Dimension of Building Energy Performance, Venice, Italy, 2019: pp. 49–61.
- 30 [195] A.S. Robertson, M. Mcinnes, D. Glass, G. Dalton, P.S. Burge, Building sickness, are
31 symptoms related to the office lighting?, *Annals of Occupational Hygiene*. 33 (1989) 47–59.
32 <https://doi.org/10.1093/annhyg/33.1.47>.
- 33 [196] M. Schweiker, M. Hawighorst, A. Wagner, The influence of personality traits on
34 occupant behavioural patterns, *Energy and Buildings*. 131 (2016) 63–75.
35 <https://doi.org/10.1016/j.enbuild.2016.09.019>.
- 36 [197] J.A. Veitch, R. Gifford, Choice, perceived control, and performance decrements in the
37 physical environment, *Journal of Environmental Psychology*. 16 (1996) 269–276.
38 <https://doi.org/10.1006/jev.1996.0022>.

- 1 [198] J.A. Veitch, G.R. Newsham, Exercised control, lighting choices, and energy use: An
2 office simulation experiment, *Journal of Environmental Psychology*. 20 (2000) 219–237.
3 <https://doi.org/10.1006/jevp.1999.0169>.
- 4 [199] G.Y. Yun, Influences of perceived control on thermal comfort and energy use in
5 buildings, *Energy and Buildings*. 158 (2018) 822–830.
6 <https://doi.org/10.1016/j.enbuild.2017.10.044>.
- 7 [200] X. Zhang, P. Wargocki, Z. Lian, C. Thyregod, Effects of exposure to carbon dioxide and
8 bioeffluents on perceived air quality, self-assessed acute health symptoms, and cognitive
9 performance, *Indoor Air*. 27 (2017) 47–64. <https://doi.org/10.1111/ina.12284>.
- 10 [201] T.C. Greene, P.A. Bell, Additional considerations concerning the effects of warm and
11 cool wall colours on energy conservation, *Ergonomics*. 23 (1980) 949–954.
12 <https://doi.org/10.1080/00140138008924804>.
- 13 [202] Y. Al Horr, M. Arif, A. Kaushik, A. Mazroei, M. Katafygiotou, E. Elsarrag, Occupant
14 productivity and office indoor environment quality: A review of the literature, *Building and
15 Environment*. 105 (2016) 369–389. <https://doi.org/10.1016/j.buildenv.2016.06.001>.
- 16 [203] G.Y. Yun, K. Steemers, Time-dependent occupant behaviour models of window control
17 in summer, *Building and Environment*. 43 (2008) 1471–1482.
18 <https://doi.org/10.1016/j.buildenv.2007.08.001>.
- 19 [204] N. Pivac, S. Nižetić, V. Zanki, Occupant behavior and thermal comfort field analysis in
20 typical educational research institution A case study, *Thermal Science*. 22 (2018) 785–795.
21 <https://doi.org/10.2298/TSCI170915013P>.
- 22 [205] S.A. Sadeghi, P. Karava, I. Konstantzos, A. Tzempelikos, Occupant interactions with
23 shading and lighting systems using different control interfaces: A pilot field study, *Building
24 and Environment*. 97 (2016) 177–195. <https://doi.org/10.1016/j.buildenv.2015.12.008>.
- 25 [206] M. Schweiker, A. Wagner, The effect of occupancy on perceived control, neutral
26 temperature, and behavioral patterns, *Energy and Buildings*. 117 (2016) 246–259.
27 <https://doi.org/10.1016/j.enbuild.2015.10.051>.
- 28 [207] A. Boerstra, T. Beuker, M. Loomans, J. Hensen, Impact of perceived control on comfort
29 and health in European office buildings, in: *10th International Conference on Healthy
30 Buildings 2012*, 2012: pp. 370–375. <http://nceub.org.uk>.
- 31 [208] J. Kim, S. Schiavon, G. Brager, Personal comfort models - A new paradigm in thermal
32 comfort for occupant-centric environmental control, *Building and Environment*. 132 (2018)
33 114–124. <https://doi.org/10.1016/j.buildenv.2018.01.023>.
- 34 [209] M. Indraganti, K.D. Rao, Effect of age, gender, economic group and tenure on thermal
35 comfort: A field study in residential buildings in hot and dry climate with seasonal
36 variations, *Energy and Buildings*. 42 (2010) 273–281.
37 <https://doi.org/10.1016/j.enbuild.2009.09.003>.

- 1 [210] S.H. Park, P.J. Lee, Reaction to floor impact noise in multi-storey residential buildings:
2 The effects of acoustic and non-acoustic factors, *Applied Acoustics*. 150 (2019) 268–278.
3 <https://doi.org/10.1016/j.apacoust.2019.02.021>.
- 4 [211] H. Jin, X. Li, J. Kang, Z. Kong, An evaluation of the lighting environment in the public
5 space of shopping centres, *Building and Environment*. 115 (2017) 228–235.
6 <https://doi.org/10.1016/j.buildenv.2017.01.008>.
- 7 [212] P.C. da Silva, V. Leal, M. Andersen, Occupants interaction with electric lighting and
8 shading systems in real single-occupied offices: Results from a monitoring campaign,
9 *Building and Environment*. 64 (2013) 152–168.
10 <https://doi.org/10.1016/j.buildenv.2013.03.015>.
- 11 [213] D. Daum, F. Haldi, N. Morel, A personalized measure of thermal comfort for building
12 controls, *Building and Environment*. 46 (2011) 3–11.
13 <https://doi.org/10.1016/j.buildenv.2010.06.011>.
- 14 [214] H. Eun Kim, H. Tokura, Influence of different light intensities during the daytime on
15 evening dressing behavior in the cold, *Physiology & Behavior*. 58 (1995) 779–783.
16 [https://doi.org/10.1016/0031-9384\(95\)00129-7](https://doi.org/10.1016/0031-9384(95)00129-7).
- 17 [215] V. Inkarojrit, Monitoring and modelling of manually-controlled venetian blinds in
18 private offices: A pilot study, *Journal of Building Performance Simulation*. 1 (2008) 75–89.
19 <https://doi.org/10.1080/19401490802021012>.
- 20 [216] B. Jeong, J.-W. Jeong, J.S. Park, Occupant behavior regarding the manual control of
21 windows in residential buildings, *Energy and Buildings*. 127 (2016) 206–216.
22 <https://doi.org/10.1016/j.enbuild.2016.05.097>.
- 23 [217] A. Kim, S. Wang, J.E. Kim, D. Reed, Indoor/outdoor environmental parameters and
24 window-opening behavior: A structural equation modeling analysis, *Buildings*. 9 (2019).
25 <https://doi.org/10.3390/buildings9040094>.
- 26 [218] H.-E. Kim, H. Tokura, Influence of Two Different Light Intensities from 16:00 to 20:30
27 Hours on Evening Dressing Behavior in the Cold, 2007.
- 28 [219] H.E. Kim, H. Tokura, Influence of Light Intensities on Dressing Behavior in Elderly
29 People, 2000.
- 30 [220] E.S. Lee, D.L. DiBartolomeo, S.E. Selkowitz, Thermal and daylighting performance of
31 an automated venetian blind and lighting system in a full-scale private office, *Energy and*
32 *Buildings*. 29 (1998) 47–63. [https://doi.org/10.1016/s0378-7788\(98\)00035-8](https://doi.org/10.1016/s0378-7788(98)00035-8).
- 33 [221] N. Li, J. Li, R. Fan, H. Jia, Probability of occupant operation of windows during
34 transition seasons in office buildings, *Renewable Energy*. 73 (2015) 84–91.
35 <https://doi.org/10.1016/j.renene.2014.05.065>.
- 36 [222] F. Naspi, M. Arnesano, L. Zampetti, F. Stazi, G.M. Revel, M. D’Orazio, Experimental
37 study on occupants’ interaction with windows and lights in Mediterranean offices during
38 the non-heating season, *Building and Environment*. 127 (2018) 221–238.
39 <https://doi.org/10.1016/j.buildenv.2017.11.009>.

- 1 [223] G. Ozcelik, B. Becerik-Gerber, R. Chugh, Understanding human-building interactions
2 under multimodal discomfort, *Building and Environment*. 151 (2019) 280–290.
3 <https://doi.org/10.1016/j.buildenv.2018.12.046>.
- 4 [224] J. Park, C.-S. Choi, Modeling occupant behavior of the manual control of windows in
5 residential buildings, *Indoor Air*. 29 (2019) 242–251. <https://doi.org/10.1111/ina.12522>.
- 6 [225] C.F. Reinhart, K. Voss, Monitoring manual control of electric lighting and blinds
7 Reinhart, C.F.; Voss, K. NRCC-45701, *Lighting Research and Technology*. 35 (2003) 243–
8 260.
- 9 [226] S. Shi, B. Zhao, Occupants’ interactions with windows in 8 residential apartments in
10 Beijing and Nanjing, China, *Building Simulation*. 9 (2016) 221–231.
11 <https://doi.org/10.1007/s12273-015-0266-z>.
- 12 [227] M. Yao, B. Zhao, Window opening behavior of occupants in residential buildings in
13 Beijing, *Building and Environment*. 124 (2017) 441–449.
14 <https://doi.org/10.1016/j.buildenv.2017.08.035>.
- 15 [228] M. Yao, B. Zhao, Factors affecting occupants’ interactions with windows in residential
16 buildings in Beijing, China, in: W. Cui, P and Liu, J and Zhang (Ed.), 10TH INTERNATIONAL
17 SYMPOSIUM ON HEATING, VENTILATION AND AIR CONDITIONING, ISHVAC2017, 2017: pp.
18 3428–3434. <https://doi.org/10.1016/j.proeng.2017.09.857>.
- 19 [229] Y. Zhang, P. Barrett, Factors influencing occupants’ blind-control behaviour in a
20 naturally ventilated office building, *Building and Environment*. 54 (2012) 137–147.
21 <https://doi.org/10.1016/j.buildenv.2012.02.016>.
- 22 [230] K. Paunović, B. Jakovljević, G. Belojević, Predictors of noise annoyance in noisy and
23 quiet urban streets, *Science of the Total Environment*. 407 (2009) 3707–3711.
- 24 [231] R. Markovic, E. Grintal, D. Wölki, J. Frisch, C. van Treeck, Window opening model using
25 deep learning methods, *Building and Environment*. 145 (2018) 319–329.
26 <https://doi.org/10.1016/j.buildenv.2018.09.024>.
- 27 [232] A.R. Hansen, K. Gram-Hanssen, H.N. Knudsen, How building design and technologies
28 influence heat-related habits, *Building Research and Information*. 46 (2018) 83–98.
29 <https://doi.org/10.1080/09613218.2017.1335477>.
- 30 [233] A. Mahdavi, A. Mohammadi, E. Kabir, L. Lambeva, Occupants’ operation of lighting and
31 shading systems in office buildings, *Journal of Building Performance Simulation*. 1 (2008)
32 57–65. <https://doi.org/10.1080/19401490801906502>.
- 33 [234] J. Kim, F. Bauman, P. Raftery, E. Arens, H. Zhang, G. Fierro, M. Andersen, D. Culler,
34 Occupant comfort and behavior: High-resolution data from a 6-month field study of
35 personal comfort systems with 37 real office workers, *Building and Environment*. 148
36 (2019) 348–360. <https://doi.org/10.1016/j.buildenv.2018.11.012>.
- 37 [235] R. Andersen, V. Fabi, J. Toftum, S.P. Corgnati, B.W. Olesen, Window opening behaviour
38 modelled from measurements in Danish dwellings, *Building and Environment*. 69 (2013)
39 101–113. <https://doi.org/10.1016/j.buildenv.2013.07.005>.

- 1 [236] V. Fabi, V. Maggiora, S.P. Corgnati, R.K. Andersen, Occupants' behaviour in office
2 buildings: Stochastic models for window opening, in: Proceedings of 8th Windsor
3 Conference: Counting the Cost of Comfort in a Changing World Cumberland Lodge, Windsor,
4 UK, London, 2014a. <https://www.researchgate.net/publication/261794473>.
- 5 [237] S. DOca, T. Hong, A data-mining approach to discover patterns of window opening
6 and closing behavior in offices, *Building and Environment*. 82 (2014) 726–739.
7 <https://doi.org/10.1016/j.buildenv.2014.10.021>.
- 8 [238] H.B. Rijal, M.A. Humphreys, J.F. Nicol, Understanding occupant behaviour: the use of
9 controls in mixed-mode office buildings, *Building Research & Information*. 37 (2009) 381–
10 396. <https://doi.org/10.1080/09613210902904221>.
- 11 [239] F. Haldi, D. Robinson, Adaptive actions on shading devices in response to local visual
12 stimuli, *Journal of Building Performance Simulation*. 3 (2010) 135–153.
13 <https://doi.org/10.1080/19401490903580759>.
- 14 [240] R.V. Jones, A. Fuertes, E. Gregori, A. Giretti, Stochastic behavioural models of
15 occupants' main bedroom window operation for UK residential buildings, *Building and*
16 *Environment*. 118 (2017) 144–158. <https://doi.org/10.1016/j.buildenv.2017.03.033>.
- 17 [241] V.M. Barthelmes, Y. Heo, R.K. Andersen, V. Fabi, S.P. Corgnati, Towards A
18 Comprehensive Model Of Window Control Behaviour: A Survey-based Investigation On
19 Interdisciplinary Drivers In Danish Dwellings, 2018.
- 20 [242] V. Fabi, V. Camisassi, F. Causone, S.P. Corgnati, R. Andersen, Light switch behaviour :
21 occupant behaviour stochastic models in office buildings, in: 8th Windsor Conference:
22 Counting the Cost of Comfort in a Changing World, 2014: pp. 10–13.
- 23 [243] A. Roetzel, Spatial considerations in modelling assumptions for manual lighting
24 control in offices, in: AIRAH and IBPSA's Australasian Building Simulation 2017, 2017.
- 25 [244] Z. Shi, H. Qian, X. Zheng, Z. Lv, Y. Li, L. Liu, P.V. Nielsen, Seasonal variation of window
26 opening behaviors in two naturally ventilated hospital wards, *Building and Environment*.
27 130 (2018) 85–93. <https://doi.org/10.1016/j.buildenv.2017.12.019>.
- 28 [245] L.V. Madsen, Materialities shape practices and notions of comfort in everyday life,
29 *Building Research and Information*. 46 (2018) 71–82.
30 <https://doi.org/10.1080/09613218.2017.1326230>.
- 31 [246] V. Inkarojrit, Balancing Comfort : Occupants' Control of Window Blinds in Private
32 Offices, PhD thesis, University of California, Berkeley, 2005.
- 33 [247] M. Indraganti, R. Ooka, H.B. Rijal, G.S. Brager, Adaptive model of thermal comfort for
34 offices in hot and humid climates of India, *Building and Environment*. 74 (2014) 39–53.
35 <https://doi.org/10.1016/j.buildenv.2014.01.002>.
- 36 [248] H.B. Rijal, P. Tuohy, M.A. Humphreys, F. Nicol, A. Samuel, An algorithm to represent
37 occupant use of windows and fans including situation-specific motivations and constraints,
38 *Building Simulation*. 4 (2011) 117–134. <https://doi.org/10.1007/s12273-011-0037-4>.

- 1 [249] F. Haldi, D. Robinson, Modelling occupants' personal characteristics for thermal
2 comfort prediction, *International Journal of Biometeorology*. 55 (2011) 681–694.
3 <https://doi.org/10.1007/s00484-010-0383-4>.
- 4 [250] M.S. Mustapa, S.A. Zaki, H.B. Rijal, A. Hagishima, M.S.M. Ali, Thermal comfort and
5 occupant adaptive behaviour in Japanese university buildings with free running and cooling
6 mode offices during summer, *Building and Environment*. 105 (2016) 332–342.
7 <https://doi.org/10.1016/j.buildenv.2016.06.014>.
- 8 [251] M.S. Rea, Window blind occlusion: a pilot study, *Building and Environment*. 19 (1984)
9 133–137. [https://doi.org/10.1016/0360-1323\(84\)90038-6](https://doi.org/10.1016/0360-1323(84)90038-6).
- 10 [252] D. Cali, R.K. Andersen, D. Mueller, B.W. Olesen, Analysis of occupants' behavior related
11 to the use of windows in German households, *Building and Environment*. 103 (2016) 54–
12 69. <https://doi.org/10.1016/j.buildenv.2016.03.024>.
- 13 [253] J. Yao, Determining the energy performance of manually controlled solar shades: A
14 stochastic model based co-simulation analysis, *Applied Energy*. 127 (2014) 64–80.
15 <https://doi.org/10.1016/j.apenergy.2014.04.046>.
- 16 [254] F. Haldi, D. Robinson, Interactions with window openings by office occupants,
17 *Building and Environment*. 44 (2009) 2378–2395.
18 <https://doi.org/10.1016/j.buildenv.2009.03.025>.
- 19 [255] V. Fabi, R.V. Andersen, S. Corngnati, B.W. Olesen, Occupants' window opening
20 behaviour: A literature review of factors influencing occupant behaviour and models,
21 *Building and Environment*. 58 (2012) 188–198.
22 <https://doi.org/10.1016/j.buildenv.2012.07.009>.
- 23 [256] M. Indraganti, R. Ooka, H.B. Rijal, G.S. Brager, Drivers and barriers to occupant
24 adaptation in offices in India, *Architectural Science Review*. 58 (2015) 77–86.
25 <https://doi.org/10.1080/00038628.2014.976539>.
- 26 [257] G.Y. Yun, K. Steemers, N. Baker, Natural ventilation in practice: Linking facade design,
27 thermal performance, occupant perception and control, *Building Research and Information*.
28 36 (2008) 608–624. <https://doi.org/10.1080/09613210802417241>.
- 29 [258] H.B. Gunay, W. O'Brien, I. Beausoleil-Morrison, S. Gilani, Development and
30 implementation of an adaptive lighting and blinds control algorithm, *Building and
31 Environment*. 113 (2017) 185–199. <https://doi.org/10.1016/j.buildenv.2016.08.027>.
- 32 [259] J. Langevin, J. Wen, P.L. Gurian, Simulating the human-building interaction:
33 Development and validation of an agent-based model of office occupant behaviors, *Building
34 and Environment*. 88 (2015) 27–45. <https://doi.org/10.1016/j.buildenv.2014.11.037>.
- 35 [260] G.M. Huebner, D.T. Shipworth, S. Gauthier, C. Witzel, P. Raynham, W. Chan, Saving
36 energy with light? Experimental studies assessing the impact of colour temperature on
37 thermal comfort, *Energy Research and Social Science*. 15 (2016) 45–57.
38 <https://doi.org/10.1016/j.erss.2016.02.008>.

- 1 [261] B. Gucyeter, Evaluating diverse patterns of occupant behavior regarding control-
2 based activities in energy performance simulation, *Frontiers of Architectural Research*. 7
3 (2018) 167–179. <https://doi.org/10.1016/j.foar.2018.03.002>.
- 4 [262] J. Kim, R. de Dear, T. Parkinson, C. Candido, Understanding patterns of adaptive
5 comfort behaviour in the Sydney mixed-mode residential context, *Energy and Buildings*.
6 141 (2017) 274–283. <https://doi.org/10.1016/j.enbuild.2017.02.061>.
- 7 [263] Y. Song, Y. Sun, S. Luo, Z. Tian, J. Hou, J. Kim, T. Parkinson, R. de Dear, Residential
8 adaptive comfort in a humid continental climate – Tianjin China, *Energy and Buildings*. 170
9 (2018) 115–121. <https://doi.org/10.1016/j.enbuild.2018.03.083>.
- 10 [264] R.V. Andersen, J. Toftum, K.K. Andersen, B.W. Olesen, Survey of occupant behaviour
11 and control of indoor environment in Danish dwellings, *Energy and Buildings*. 41 (2009)
12 11–16. <https://doi.org/10.1016/j.enbuild.2008.07.004>.
- 13 [265] S. Wei, R. Buswell, D. Loveday, Factors affecting ‘end-of-day’ window position in a
14 non-air-conditioned office building, *Energy and Buildings*. 62 (2013) 87–96.
15 <https://doi.org/10.1016/j.enbuild.2013.02.060>.
- 16 [266] S. Pan, Y. Xiong, Y. Han, X. Zhang, L. Xia, S. Wei, J. Wu, M. Han, A study on influential
17 factors of occupant window-opening behavior in an office building in China, *Building and
18 Environment*. 133 (2018) 41–50. <https://doi.org/10.1016/j.buildenv.2018.02.008>.
- 19 [267] V. Fabi, R.V. Andersen, S.P. Corgnati, Influence of occupant’s heating set-point
20 preferences on indoor environmental quality and heating demand in residential buildings,
21 *HVAC&R Research*. 19 (2013) 635–645. <https://doi.org/10.1080/10789669.2013.789372>.
- 22 [268] G.Y. Yun, H. Kim, J.T. Kim, Thermal and non-thermal stimuli for the use of windows in
23 offices, *Indoor and Built Environment*. 21 (2012) 109–121.
24 <https://doi.org/10.1177/1420326X11420012>.
- 25 [269] M. Schweiker, F. Haldi, M. Shukuya, D. Robinson, Verification of stochastic models of
26 window opening behaviour for residential buildings, *Journal of Building Performance
27 Simulation*. 5 (2012) 55–74. <https://doi.org/10.1080/19401493.2011.567422>.
- 28 [270] S. Wei, R. Jones, P. De Wilde, Driving factors for occupant-controlled space heating in
29 residential buildings, *Energy and Buildings*. 70 (2014) 36–44.
30 <https://doi.org/10.1016/j.enbuild.2013.11.001>.
- 31 [271] L. Sanati, M. Utzinger, The effect of window shading design on occupant use of blinds
32 and electric lighting, *Building and Environment*. 64 (2013) 67–76.
33 <https://doi.org/10.1016/j.buildenv.2013.02.013>.
- 34 [272] A. Heydarian, E. Pantazis, J.P. Carneiro, D. Gerber, B. Becerik-Gerber, Lights, building,
35 action: Impact of default lighting settings on occupant behaviour, *Journal of Environmental
36 Psychology*. 48 (2016) 212–223. <https://doi.org/10.1016/j.jenvp.2016.11.001>.
- 37 [273] V. Fabi, R.K. Andersen, S. Corgnati, Accounting for the Uncertainty Related to Building
38 Occupants with Regards to Visual Comfort : A Literature Survey on Drivers and Models,
39 *Buildings*. 6 (2016). <https://doi.org/10.3390/buildings6010005>.

- 1 [274] J. Langevin, P.L. Gurian, J. Wen, Tracking the human-building interaction: A
2 longitudinal field study of occupant behavior in air-conditioned offices, *Journal of*
3 *Environmental Psychology*. 42 (2015) 94–115.
4 <https://doi.org/10.1016/j.jenvp.2015.01.007>.
- 5 [275] F. Haldi, D. Cali, R.K. Andersen, M. Wesseling, D. Mueller, Modelling diversity in
6 building occupant behaviour: a novel statistical approach, *Journal of Building Performance*
7 *Simulation*. 10 (2017) 527–544. <https://doi.org/10.1080/19401493.2016.1269245>.
- 8 [276] C. Eon, G.M. Morrison, J. Byrne, The influence of design and everyday practices on
9 individual heating and cooling behaviour in residential homes, *Energy Efficiency*. 11 (2018)
10 273–293. <https://doi.org/10.1007/s12053-017-9563-y>.
- 11 [277] G.Y. Yun, K. Steemers, Night-time naturally ventilated offices: Statistical simulations of
12 window-use patterns from field monitoring, *Solar Energy*. 84 (2010) 1216–1231.
13 <https://doi.org/10.1016/j.solener.2010.03.029>.
- 14 [278] M. Schweiker, S. Brasche, W. Bischof, M. Hawighorst, A. Wagner, Explaining the
15 individual processes leading to adaptive comfort: Exploring physiological, behavioural and
16 psychological reactions to thermal stimuli, *Journal of Building Physics*. 36 (2013) 438–463.
17 <http://jen.sagepub.com/content/36/4/438.short>.
- 18 [279] A. Mahdavi, M. Taheri, An ontology for building monitoring, *Journal of Building*
19 *Performance Simulation*. 10 (2017) 499–508.
20 <https://doi.org/10.1080/19401493.2016.1243730>.
- 21 [280] B. Flyvbjerg, Five Misunderstandings About Case-Study Research, *Qualitative Inquiry*.
22 12 (2006) 219–245. <https://doi.org/10.1177/1077800405284363>.
- 23 [281] S. Kanaya, Y. Matsushima, K. Yokosawa, Does Seeing Ice Really Feel Cold? Visual-
24 Thermal Interaction under an Illusory Body-Ownership, *PLOS ONE*. 7 (2012) e47293.
25 [10.1371/journal.pone.0047293](https://doi.org/10.1371/journal.pone.0047293).
- 26 [282] B.E. Stein, T.R. Stanford, Multisensory integration: current issues from the perspective
27 of the single neuron, *Nature Reviews Neuroscience*. 9 (2008) 255–266.
28 <https://doi.org/10.1038/nrn2331>.
- 29 [283] D. Talsma, D. Senkowski, S. Soto-Faraco, M.G. Woldorff, The multifaceted interplay
30 between attention and multisensory integration, *Trends in Cognitive Sciences*. 14 (2010)
31 400–410. <https://doi.org/10.1016/j.tics.2010.06.008>.
- 32 [284] I. Ajzen, The theory of planned behavior, *Organizational Behavior and Human*
33 *Decision Processes*. 50 (1991) 179–211.
- 34 [285] R. Zierler, W. Wehrmeyer, R. Murphy, The energy efficiency behaviour of individuals
35 in large organisations: A case study of a major UK infrastructure operator, *Energy Policy*.
36 104 (2017) 38–49. <https://doi.org/10.1016/J.ENPOL.2017.01.033>.
- 37 [286] Z.H. Ding, Y.Q. Li, C. Zhao, Y. Liu, R. Li, Factors affecting heating energy-saving
38 behavior of residents in hot summer and cold winter regions, *Natural Hazards*. 95 (2019)
39 193–206. <https://doi.org/10.1007/s11069-018-3489-3>.

- 1 [287] W. O'Brien, M. Schweiker, J.K. Day, Get the picture? Lessons learned from a
2 smartphone-based post-occupancy evaluation, *Energy Research & Social Science*. 56 (2019)
3 101224. <https://doi.org/10.1016/j.erss.2019.101224>.
- 4 [288] H. Akaike, Proceedings of the Second International Symposium on Information
5 Theory, in: B.N. Petrov (Ed.), 1973: pp. 267–281.
- 6 [289] S. D'Oca, C.-F. Chen, T. Hong, Z. Belafi, Synthesizing building physics with social
7 psychology: An interdisciplinary framework for context and occupant behavior in office
8 buildings, *Energy Research & Social Science*. 34 (2017) 240–251.
9 <https://doi.org/10.1016/j.erss.2017.08.002>.
- 10 [290] M.B. Kane, Modeling Human-in-the-Loop Behavior and Interactions with HVAC
11 Systems, in: 2018 Annual American Control Conference (ACC), 2018: pp. 4628–4633.
12 <https://doi.org/10.23919/ACC.2018.8431913>.