

This is an Open Access document downloaded from ORCA, Cardiff University's institutional repository: <https://orca.cardiff.ac.uk/id/eprint/158482/>

This is the author's version of a work that was submitted to / accepted for publication.

Citation for final published version:

Alsafery, Wael, Rana, Omer and Perera, Charith 2023. Sensing within smart buildings: A survey. ACM Computing Surveys 55 (13s) , 297. 10.1145/3596600

Publishers page: <https://doi.org/10.1145/3596600>

Please note:

Changes made as a result of publishing processes such as copy-editing, formatting and page numbers may not be reflected in this version. For the definitive version of this publication, please refer to the published source. You are advised to consult the publisher's version if you wish to cite this paper.

This version is being made available in accordance with publisher policies. See <http://orca.cf.ac.uk/policies.html> for usage policies. Copyright and moral rights for publications made available in ORCA are retained by the copyright holders.



# Sensing within Smart Buildings: a Survey

Wael Alsafery, Cardiff University, UK

Omer Rana, Cardiff University, UK

Charith Perera, Cardiff University, UK

Increasingly, buildings are being fitted with sensors for the needs of different sectors, such as education, industry and business. Using Internet of Things (IoT) devices combined with analysis of data being generated by these devices, it is possible to infer a number of metrics, e.g. building occupancy and activities of occupants. The information thus gathered can be used to develop software applications to support energy management, occupant comfort, and space utilization. This survey explores the use of sensors in smart building environments, identifying different approaches to employ sensors in buildings. The most commonly used data-driven approaches for activity recognition in such buildings is also investigated, concluding by highlighting current research challenges and future research directions in this area.

CCS Concepts: • **General and reference** → **Surveys and overviews**; • **Human-centered computing** → **Ubiquitous and mobile computing systems and tools**.

Additional Key Words and Phrases: Sensors, Smart buildings, Occupancy, Activity recognition.

## ACM Reference Format:

Wael Alsafery, Omer Rana, and Charith Perera. 2023. Sensing within Smart Buildings: a Survey. *ACM Comput. Surv.* 99, 9, Article 99 (March 2023), 35 pages. <https://doi.org/10.1145/1122445.1122456>

## 1 INTRODUCTION

Smart buildings are intelligent buildings that use technology to optimize energy efficiency, cost savings, operational performance, and occupant comfort and safety. They are equipped with sensors/ devices and generate data that allows them to control and measure the environment, such as temperature and humidity, lighting, energy use, and more. Smart building systems can also connect with other smart devices such as smartphones and smart home appliances, to provide a seamless user experience. By integrating advanced automation, analytics, and Machine Learning (ML) technologies, smart buildings can offer improved quality of life in terms of air quality, occupants comfort, and energy consumption. Smart buildings can include offices, homes, hospitals and libraries, all of which provide targeted automated services.

To understand the size of the global smart building market and its potential for development in the coming years, a recent report from Maximize Market Research [3] offers some key data; this report shows that the number of smart buildings globally is accelerating annually. In 2016, the market for smart buildings was approximately US \$5.92B. By 2024, it is expected to reach US \$47.8B. The report thus emphasizes the importance of this sector and the expected increase in demand and scientific research in this field in coming years.

---

Authors' addresses: Wael Alsafery, Cardiff University, CF24 2FL, Cardiff, UK, [Alsaferywa@cardiff.ac.uk](mailto:Alsaferywa@cardiff.ac.uk); Omer Rana, Cardiff University, CF24 2FL, Cardiff, UK, [ranaof@cardiff.ac.uk](mailto:ranaof@cardiff.ac.uk); Charith Perera, Cardiff University, CF24 2FL, Cardiff, UK, [pererac@cardiff.ac.uk](mailto:pererac@cardiff.ac.uk).

---

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).

© 2023 Association for Computing Machinery.

0360-0300/2023/3-ART99 \$15.00

<https://doi.org/10.1145/1122445.1122456>

Smart building make use of Internet of Things (IoT) technology combined with Machine Learning and data analytics to achieve a range of services. These IoT devices are deployed in multiple locations around a building for different purposes; for example, a sensor might be deployed in a building elevator to send data to a maintenance team in case of an emergency or where malfunction/deterioration is detected. Communication is achieved through various wireless communications protocols, yet the sensor data alone are meaningless. Such data must be processed using, for instance, single-board computers (SBCs), servers, or cloud systems, to extract meaningful information. Valuable insights can be obtained to support numerous applications in a building, such as lighting and environmental control systems.

The research method included search across the ACM Digital Library, BuildSys, SIGCHI, SenSys, IEEE Xplore, and Google Scholar. During the research process, keywords and phrases used included "smart buildings," "occupancy sensing," "occupancy estimation," "activity detection," "activity recognition," "sensing in smart buildings," "occupancy estimation in smart buildings," "activity detection in smart buildings," "behavior monitoring in smart buildings," "analytics used in smart buildings," and "sensing as services within smart buildings." The Boolean operators "and" and "or" were used to obtain better results, in addition, the word "sensors" was added to all previous keyword searches, as the target research field is the sensing domain in smart buildings.

In total, 137 research papers on sensing and activity recognition in smart building environments were reviewed. These papers were classified according to identified activities, data analysis algorithms used, number of sensors, sensor types, deployed locations and smart building types. Some research papers did not specifically mention where the identified activity occurred inside or outside the building. However, most were categorized into two indoor and/ or outdoor environments, which facilitated classification. The outdoor environment referenced activities such as swimming for instance (i.e. activities outside the building), and were eliminated based on this paper's focus on indoor environments and activities within smart buildings. Other research papers which did not mention the sensor type used in the relevant study were also removed from our survey.

### 1.1 Existing Reviews

Although many research papers have been published on sensing within smart buildings, many areas have not yet been explored in depth. This paper aims to review sensing technology used in different types of buildings, including identifying the IoT sensors used and their types, their deployed locations, and the activities identified. We explore how people use sensors to understand different types of building usage. Table 1 compares the relevant review studies in more detail.

Other research has focused more on buildings themselves: Pan et al. [114] concentrated on energy efficiency developments in buildings and microgrids, while Saha et al. [131] focused on data analytics approaches in smart buildings, and Liu et al. [92] concentrated on the integration of Building Information Modelling (BIM) and sensors. However, none of these papers focused on how sensors are used in smart buildings in terms of their types, deployment locations, and identified activities. In addition, more attention needs to be paid to recognizing how sensors can be used to understand various activities inside buildings.

### 1.2 Contributions and Article Organization

The research contribution of this paper can be summarized in three main points:

- Review existing research to identify what types of sensors are being used in smart buildings, where they were deployed, and activities they were able to identify.
- Explore how different types of sensors and data analytics are being combined to better discover activities within smart buildings.

Table 1. Existing survey papers

| Reference               | Sensor types | Deployed locations | Activities identified | Analytics used | Purpose  | Focus  |
|-------------------------|--------------|--------------------|-----------------------|----------------|--|--|
| Kazmi et al. [65]       |              |                    |                       | ✓              | Review Wireless Sensor Network (WSNs) enabled Building Energy Management Systems (BEMS)  | The paper focused on energy management systems   |
| Djenouri et al. [33]    |              |                    | ✓                     | ✓              | Review data analytics used in smart building applications. Considering various types of ML tools and applications  | The paper's main focus was on ML approaches used in smart building applications  |
| Alam et al. [4]         | ✓            |                    | ✓                     | ✓              | Review Smart Home (SH) projects, security, comfort, and healthcare. It describes used sensors, protocols, algorithms, and systems used widely in SH  | The paper focused on the SH environment. It classified sensors, communication protocols, and technologies used inside SH |
| Verma et al. [156]      | ✓            |                    |                       |                | Review infrastructure, controlling, and sensing in smart buildings. The review was based on IoT sensor-actuator automation in smart buildings  | The paper reviews IoT infrastructure in smart buildings, sensing and control   |
| Qolomany et al. [123]   |              | ✓                  |                       | ✓              | Review big data and ML analytics in smart buildings.   | The paper focused on big data and ML use in smart buildings  |
| De Paola et al. [32]    | ✓            | ✓                  |                       |                | Review intelligent systems for energy management. Focusing on existing architectures and methodologies   | The paper focused on energy-aware intelligent management systems in smart buildings                                      |
| Kumar et al. [75]       | ✓            |                    |                       | ✓              | Review monitoring technologies in smart buildings. The review focuses on sensor-actuator-based applications  | The paper reviews smart building monitoring sensing technologies   |
| Dong et al. [34]        | ✓            |                    |                       | ✓              | Review indoor sensing systems in smart buildings. It discussed types and applications of sensors regarding energy-saving and occupant comfort  | The paper focused on sensing systems in smart buildings. It focused more on HVAC control systems                         |
| Jia et al. [62]         | ✓            |                    | ✓                     |                | Review IoT technologies in buildings focusing on cases from academia and industry with future implementation recommendations in building construction and operation phases                                       | The paper focused on investigating the adoption of IoT for developing smart buildings                                    |
| Nguyen and Aiello [109] | ✓            |                    | ✓                     | ✓              | Review energy intelligent buildings based on user activities and determine valuable activities and behavior and their impact on energy savings in three subsystems: lighting, energy saving HVAC, and plug loads | The paper focus specifies valuable activities and behaviors and their impact on energy savings                           |

- Review how sensing systems are being used to monitor and measure the most common smart building objectives.
- Highlight current research challenges and discussing future research directions for sensing within smart buildings.

The paper is organized as follows. Section 2 presents a review of sensing systems within buildings, and Section 3 discusses activity recognition in buildings. Section 4 presents key objectives that can be achieved using smart building capabilities. In section 5, challenges and future research directions emerging from this work are highlighted. Finally, concluding remarks are provided in Section 6.

## 2 SENSING WITHIN BUILDINGS

Sensing technology plays a crucial role in implementing various applications inside buildings, such as medical, agriculture and more. A variety of sensor types exist depending on their use within a smart building. Each group of sensors may represent a sensing system used to accomplish a specific task, such as recognizing human presence.

### 2.1 Sensors

Smart building sensing technology can collect data about the physical aspects of a building, such as temperature, humidity and ambient light. The data is then interpreted to deduce activities and exchanged through various transmission media. The data are then received and processed by more powerful processing devices, such as microcontrollers and single-board computers, to extract the required information. Sensors can measure various activities in a building and provide helpful information that can provide recommendations to reduce the cost of everyday activities, such as energy consumption, and detect abnormal events like falling of a person on the floor. The most commonly employed sensing technologies for occupancy sensing are infrared, ultrasonic and microwave sensors which give higher accuracy reading about occupancy. Combining other sensors, such as temperature and humidity, could improve the overall occupancy sensing accuracy. A study reached a detection accuracy of up to 99.79% in an office building using infrared and CO<sub>2</sub> sensors [64]. Activity recognition can be achieved using a number of different types of sensors – the most used include wearable motion, vision, and embedded sensors.

Other sensors also help recognize activities, such as infrared and pressure sensors. A study used a tri-axial accelerometer and pressure sensor to differentiate normal action and violent attacks, and reached a 98.8% classification accuracy [126]. Another study reaches 98.3% recognition accuracy for activities such as sitting, standing and walking by using a low-resolution infrared array sensor [173]. One of the most used sensors in improving energy efficiency in smart buildings is occupancy sensors, as they can be utilized to control various electricity loads in the building, such as switching lights off when space is not occupied. Combining sensors gives higher accuracy most of the time. However, other factors, such as environmental conditions, could affect the sensors accuracy.

Sensing in buildings aims to maximize the use and efficiency of the building based on monitoring and understanding of the activities in the building. The sensor types and numbers used within buildings depend on the needs of a specific application. However, other factors, such as cost, processing time, and accuracy, should also influence the selection of suitable sensors. Aziz et al. [9] proposed using a single sensor to recognize person activity, reducing costs and facilitating data processing. In contrast, Liang et al. [86] suggested using more sensors to achieve higher accuracy and collect more data. A multipurpose sensor is recommended by Wagner et al. [159], which may be more convenient and easier to install.

The classification of existing sensors can be confusing, as this depends on several factors, such as sensor specification, sensor output signal type, and field of application. Elhoushi et al. [37] and Dong et al. [34] classified sensors in a more coordinated way, and this work thus combines their classification methods, as illustrated in Figure 1, some of the most commonly used sensors in smart buildings are therefore defined as follows:

- **Temperature Sensors.** These are among the most widely used sensors, and their primary function is to measure temperature changes. As the ambient temperature changes in temperature, some of the sensor's physical properties, such as resistance or voltage change. Further, there are many different temperature sensors, such as the LM35 sensor, thermal resistance sensors, and thermocouple switches. These sensors have been used in various studies for occupancy sensing [108], occupancy prediction [161], and occupancy behavior [63].

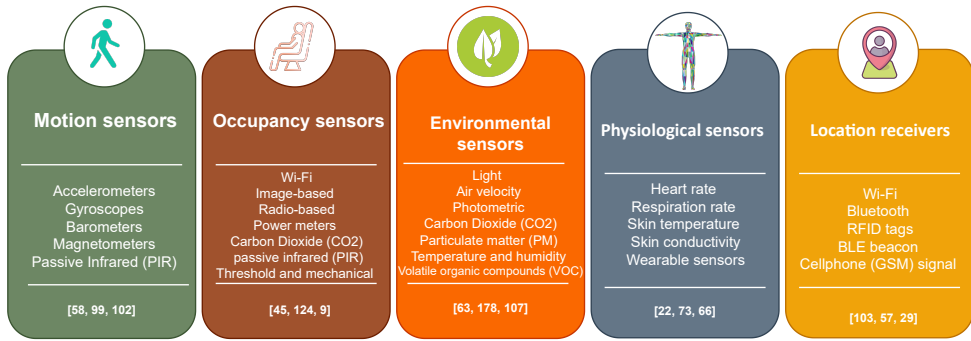


Fig. 1. Different types of sensors commonly used within smart buildings.

- **Humidity Sensors.** These devices accurately sense and assess the amount of water vapor in the atmosphere. Accordingly, they can measure the relative humidity and the degree of condensation in a room to achieve occupancy sensing and identify occupants' behaviors in smart buildings [63, 108].
- **Carbon Dioxide (CO2) Sensors.** These are used to measure the proportion of carbon dioxide in the air, thus assessing the emission levels of CO2 inside the building. These are widely used in occupancy sensing, and counting applications in smart buildings [64, 127].
- **Proximity Sensors.** These do not require physical contact to detect the presence of surrounding items, based on remotely assessing physical quantities related to distance and place. They can be divided into optical, inductive, and capacitive. They have been used in applications within smart buildings, such as indoor localization [93] and occupancy estimation [127].
- **Pressure Sensors.** Pressure is defined as the force perpendicular to a unit area, and pressure sensors thus monitor this force. A pressure sensor responds to pressure as a physical quantity. These are used in various areas, such as in military operations, water-lifting engines at certain pressure levels, and similar engineering applications. They are used in buildings mainly to detect human body postures [98] and activities [60, 126].
- **Infrared Sensors.** Infrared sensors are based on the principle of light detection and are usually used to estimate distances, as in most modern smartphones. There are two types of infrared sensors: transmissive and reflective sensors.
- **Motion Sensors.** These sensors are employed to monitor the motion of a person into or across a specific area. These sensors are often used in security alarm systems or lighting systems that automatically turn on when someone moves within a specified area. Although cameras may also be used in buildings to detect human presence, motion sensors have advantages of privacy and cost over cameras. They are thus often used in buildings to detect human activities [66, 80, 126].
- **Millimeter-wave radio sensors.** It uses radio waves in the millimeter wave range to detect and measure objects. It is used in various building applications, such as for security, occupant identification and detection [49], and indoor localization [71]. Table 2 shows some commonly used sensors within smart buildings and their uses.

## 2.2 Sensors Deployed Locations

Choosing the correct location is not always easy for sensors deployed in various locations inside buildings, as the sensor location must take into account a range of different factors, including sensor coverage area, distance from the measured object, and the relevant external conditions.

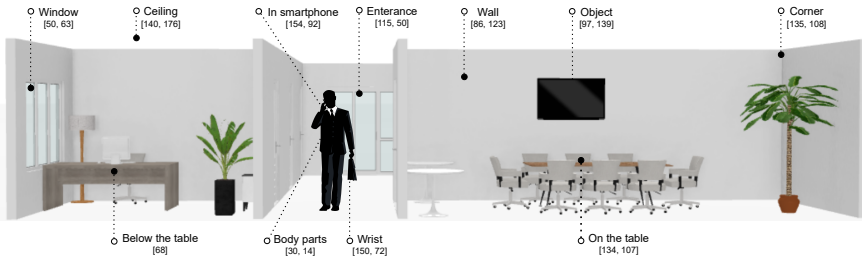


Fig. 2. Common sensor deployment locations within smart buildings.

The type of task to be completed must be considered when deciding on sensor deployment locations. For example, when monitoring the heartbeat every few minutes, sensors must be deployed on the wrist or other pulse point or body parts close to the heart. Figure 2 shows some common sensor deployment locations within smart buildings.

Laidi and Djenouri [76] proposed a means of dividing buildings into zones based on their occupancy and occupants' behaviors using PIR motion sensors. The building zones are divided into high and low-occupation zones, and a graph model is produced using a clustering algorithm. This solution was compared with two other studies, showing better accuracy and scalability. It could also be applied to different sensors, such as ultrasound. Sembroiz et al. [134] conducted a study on optimizing energy consumption in buildings that proposed a novel model to allocate optimal location to sensors and gateways. This was predicted to work with various sensor types, reducing the number of sensors and gateways required and optimizing energy consumption while maintaining sensing coverage and protection.

Studies conducted by Laidi and Djenouri [76] and Sembroiz et al. [134] proposed different solutions to effectively deploy sensors in smart buildings. Deploying sensors optimally helps optimize energy consumption [134] and sensing coverage [76] while minimizing the risk of privacy breaches and economic costs. However, other factors should also be considered, such as scalability and applicability. Further, occupation or use of different areas by people in smart buildings are not always evenly distributed; some areas are fully equipped and heavily utilized, thus requiring more sensors to cover more activities. At the same time, some other areas are underutilized. These areas should be identified to minimize the total cost and optimize building energy consumption because each assigned sensor directly or indirectly costs money, time, and resources, during the installation and maintenance phases.

Cost is an essential factor to consider when selecting and deploying sensors. There is a variety of sensing technology that can be used; some of them are more expensive. Sensing technology high in cost typically has a more range of features and capabilities, such as cameras, radar, and multi-spectral imaging sensors, when compared to fewer cost sensing technologies, such as motion and light sensors. Dong et al. [34] summarizes most of the used commercial occupancy sensing technologies used in smart buildings and finds that infrared cameras and RFID technologies are one of the most costly technologies, while reed switch, motion, and infrared technologies are the least expensive.

Privacy concerns are another important factor, as they often revolve around using sensors and other technologies that collect information about an individual's activities. Developing robust technologies is essential to ensure user privacy is maintained. Sensors should be regularly monitored for any suspicious activity. They should use various privacy-enhancing technologies to protect user data, such as data minimization methods that can reduce the amount of personal data.

Table 2. Commonly used sensors within smart buildings

| Sensor type     | Sensor location   | Number of sensors          | Building type*  | Objective   | Reference |
|-----------------|---|----------------------------|---|---|-----------|
| CO <sub>2</sub> | Two feet above the floor                                  | 4                          | Indoor environment - classroom                        | Occupancy estimation IoT model for Indoor environments  | [127]     |
|                 | On return ducting, supply ducting, and middle of the room | 5                          | Office environment - room                             | Occupancy estimation at low-scale level in office environment   | [125]     |
|                 | On ceiling  | Different numbers          | Office environment - floor                            | Occupancy count estimation in office environment  | [52]      |
|                 | On table  | 2                          | Office environment - room                             | Occupancy detection in office environment   | [64]      |
|                 | Inside and outside the room                               | 2                          | Smart home environment - room                         | Occupancy detection in smart home environment   | [179]     |
|                 | On wall around 1.5m height                                | 6                          | Office environment - room                             | Occupancy modeling for cross spaces in office environment   | [170]     |
| Infrared        | Placed on ceiling and wall                                | 2                          | Indoor environment - meeting room                     | Activity detection include: walking, standing, sitting, lying, falling, and action change   | [106]     |
|                 | Placed on a flat acrylic plate                            | 5                          | Smart home environment - room                         | Activity recognition for five different activities in 4 house rooms   | [103]     |
|                 | On ceiling  | Hundreds                   | Indoor environment - building                         | Anomaly detection to improve building energy efficiency   | [132]     |
|                 | Facing the door   | 2                          | Indoor environment - room                             | Occupancy estimation to find number of people in the room   | [44]      |
|                 | On ceiling  | 3                          | Indoor environment - room                             | Anomalous occupancy behavior detection  | [158]     |
|                 | In off-the-shelf earpiece                                 | 3                          | Indoor environment - laboratory                       | Detecting eating activities include: talking, silent, eating, and walking   | [11]      |
| Radar           | On ceiling  | 4                          | Office environment - room                             | Office occupancy activities include: walking at different speeds, and desk work   | [115]     |
|                 | Placed at ceiling level                                   | 1                          | Educational environment - classroom                   | Occupancy count estimation in an indoor environment   | [172]     |
|                 | Placed opposite of the corners                            | 2                          | Indoor environment - kitchen                          | Kitchen activity detection with 15 activities include: walking, eating, drinking, sitting, etc.   | [95]      |
|                 | Mounted on a tripod stand                                 | 1                          | Indoor environment - room                             | Human activity recognition include: walking, jumping, jumping jacks, squats, and boxing   | [140]     |
|                 | On hand wrist   | 4                          | Indoor environment - laboratory                       | Recognition 10 daily human activities includes: walk, walk while carrying an object, sitting, standing, pick up an object, tie shoelaces, drinking water, answer a phone call, fall, and crouch and stand back up | [80]      |
|                 | -   | 3                          | Office environment - room                             | Human activities classification include: walking, walking and carrying an object, sitting, standing, bending and coming back, etc.  | [81]      |
|                 | On table  | 2                          | Office environment - room                             | Detect and locate the presence of multiple people   | [49]      |
|                 | -   | 12 Wi-Fi Access Point (AP) | Office environment - room                             | Office occupancy detection  | [120]     |
| Wi-Fi           | -   | 2 APs                      | Office environment - room                             | Occupancy estimation in an office environment   | [8]       |
|                 | -   | 7 and 9 APs in two floors  | Office environment - floor                            | Occupants count estimation in an office environment   | [163]     |
|                 | -   | 4 APs                      | Office environment - personal and shared space        | Occupancy sensing-based HVAC actuation in an office environment   | [10]      |
|                 | -   | 32 AP                      | Office environment - floor                            | Occupancy detection in an office environment  | [47]      |
|                 | On the arm, leg, and neck                                 | 3                          | Indoor environment - Multivariate time-series dataset | Recognition of different activities from three datasets including down-stairs, jogging, going upstairs, sitting, walking, and standing.   | [58]      |

Continued on next page

Table 2 – Continued from previous page

| Sensor type                   | Sensor location   | Number of sensors | Building type   | Objective   | Reference |
|-------------------------------|---|-------------------|---|---|-----------|
| Accelerometers and gyroscopes | On hand wrist   | 4                 | Indoor environment - laboratory                         | Recognition 10 daily human activities includes: walk, walk while carrying an object, sitting, standing, pick up an object, tie shoelaces, drinking water, answer a phone call, fall, crouch and stand back up | [80]      |
|                               | On hand wrist   | 2                 | Office environment - room                               | Recognizing six different activities in the office includes: sitting, standing, lying, walking, walking upstairs, and walking downstairs  | [100]     |
|                               | Attached to six body positions                            | 3                 | Indoor environment - building                           | Recognizing set of twenty normal daily activities includes: kitchen work activities, household cleaning activities, office-work activities, etc.  | [38]      |
|                               | On door, fridge door, drawer, towel dispenser, and window | 5                 | Indoor environment - building                           | Occupant Identification in smart home perform predefined activities: knock, opening/closing door, fridge, etc.  | [50]      |
|                               | In smartphone   | 2                 | Indoor environment - room                               | Human activity recognition system test 12 activities from dataset: standing, sitting, lying down, walking, etc.   | [51]      |
| Bluetooth Low Energy (BLE)    | On ceiling  | 7                 | Indoor environment - room                               | Abnormal activities detection include: falling, sitting down, standing up from a chair, walking, and jogging.   | [97]      |
|                               | Three meters above the center of the detection area       | 1                 | Indoor environment - room                               | Human activity recognition of five states: lying, standing, sitting, walking, and empty   | [173]     |
|                               | On ceiling  | -                 | Indoor environment - room                               | Group activity detection include: taking class, seminar, and discussion   | [22]      |
|                               | On ceiling  | 12                | Office environment - shared, personal, and social space | Multi-Occupancy detection in an office environment  | [120]     |
|                               | Placed on the room corners and center                     | 8                 | Office environment - room                               | Indoor positioning inside an office building  | [124]     |
| Pressure                      | On jacket   | 11                | Controlled environment - laboratory                     | Human activity detection between normal motion and violent attack   | [126]     |
|                               | Attached on supporters at a height of 1.1m                | 2                 | Indoor environment - laboratory                         | Occupancy estimation in an indoor environment   | [26]      |
|                               | At the door way and in front of the room                  | 2                 | Educational environment - classroom                     | Occupancy prediction in an indoor environment using IoT technology  | [116]     |
|                               | Cushion equipped with pressure sensors                    | 12                | Indoor environment - laboratory                         | Posture detection include: proper sitting, lean left, lean right, lean forward, and lean backward   | [98]      |
| Temperature                   | On ceiling  | 5                 | Indoor environment - building                           | Occupancy prediction to improving building energy efficiency  | [161]     |
|                               | Near the occupant   | 5                 | Office environment - building                           | Exploring occupant behaviors to improve office building energy. Include: window, door, and blinds status  | [63]      |
|                               | On table  | 4                 | Indoor environment - building                           | Occupancy sensing for smart buildings   | [108]     |
|                               | On wristband  | -                 | Indoor and outdoor environment                          | Detection of migraine attacks   | [74]      |

\* Papers that do not mention the building type environment are classified as either indoor or outdoor environment based on the context of the paper.

In this review, the deployment locations are classified based on sensor location, sensor type, and measured activity type. Two different studies Muthukumar et al. [106] and Liang et al. [87] were found to use the same sensor type, an Infrared array sensor, to detect similar activities such as falling and movement. The sensors in each case were deployed in different locations. Another pair of studies, Papatsimpa and Linnartz [115] and Pratama et al. [120] detected similar activities and gathered data about office occupancy using sensors deployed in a similar location on the ceiling, yet used sensor types that were different, with Radar and BLE beacons used, respectively.

Another two studies, Luo et al. [97] and Samani et al. [132], used the same sensor type, a PIR motion detector, was deployed in a similar location on the ceiling to detect different activity types; one focused on the detection of abnormal activity, such as sudden falls, while the other concentrated on building anomaly detection to improve energy efficiency. This illustrates that each case has different requirements for determining the appropriate location to deploy sensors. Table 3 demonstrates some common sensor deployment locations within smart buildings.

Table 3. Common sensors deployment locations

| Sensor location          | Sensor type   | Details   | Reference |
|--------------------------|---|---|-----------|
| On ceiling               | Radar   | Detecting office occupancy by identifying walking at different speeds and desk work   | [115]     |
|                          | Heat  | Occupancy prediction in meeting room for smart offices  | [141]     |
|                          | Temperature, humidity, CO2  | Occupancy prediction to improve building energy efficiency  | [161]     |
|                          | PIR motion  | Abnormal activities detection include: falling, sitting down, standing up from a chair, walking, and jogging.   | [97]      |
|                          | Infrared Array  | Object detection and tracking in commercial buildings   | [48]      |
|                          | PIR motion  | Anomaly detection to improve building energy efficiency   | [132]     |
|                          | BLE beacons   | Office occupancy detection  | [120]     |
|                          | BLE beacons   | Group activity detection include: taking class, seminar, and discussion   | [22]      |
|                          | Camera, doppler motion, radio frequency RF  | Occupancy sensing and activity recognition include: walking in a room, sitting in a chair, lying on a bed, and body turning on a bed  | [177]     |
| On wall or corner        | RFID  | Teamwork activity recognition include: oxygen preparation, blood pressure, cardiac lead placement, temperature measurement, ear exam, and other activities                                  | [84]      |
|                          | Infrared array  | Activity recognition include: quiescence, fall, and movement  | [87]      |
|                          | Camera  | Occupancy sensing and activity recognition include: walking in a room, sitting in a chair, lying on a bed, and body turning on a bed  | [177]     |
|                          | Infrasound  | Door opening and closing detection  | [70]      |
| On/below table           | BLE beacons   | Indoor positioning inside an office building  | [124]     |
|                          | Radar   | Activities recognition include: walking, sitting and standing, bending to pick up a pen, drinking water, and frontal fall   | [82]      |
|                          | Temperature, humidity, light, CO2   | Occupancy sensing in smart buildings  | [108]     |
|                          | PIR motion  | Occupancy estimation for individual presence  | [135]     |
| On the floor/ underfloor | Millimeter-wave radio   | Detect and locate the presence of multiple people   | [49]      |
|                          | Pressure mat  | Smart floor monitoring system   | [136]     |
|                          | BLE beacons   | Provides navigation aids for blind and visually impaired people   | [27]      |
|                          | Radon detector  | Indoor radon gas concentration monitoring   | [14]      |
| On smartphone            | RFID  | Navigation in indoor environment  | [90]      |
|                          | Accelerometer, gyroscope, magnetometer  | Activity detection include: walking, running, and standing  | [155]     |
|                          | Triaxial accelerometers and gyroscopes  | Activity recognition include: standing, sitting, lying down, walking, walking-upstairs/downstairs, stand-to-sit, sit-to-stand, sit-to-stand, stand-to-stand, stand-to-stand, stand-to-stand | [51]      |
|                          | Magnetic  | Indoor localization   | [93]      |
| On wrist                 | Accelerometer, gyroscope  | Human activity sitting detection include: sitting, standing, lying, walking, walking upstairs, and walking downstairs   | [100]     |
|                          | Wrist-mounted inertial sensors  | Eating detection and food intake gesture classification   | [151]     |
|                          | Empatica E4 device with sensors: accelerometer, photoplethysmography, temperature, electrodermal activity | Detection of migraine attacks using Empatica E4 wearable wristband  | [74]      |
|                          | 3-axis accelerometer  | Activity recognition include: draw, wash dishes, write, and brush   | [73]      |
| On body parts            | Wearable device (accelerometer, gyroscope, magnetometer, and electrocardiogram)                           | Presence or the absence of the fall, static or dynamic movements including fall, recognizes the fall, and six other activities  | [66]      |
|                          | Accelerometer, proximity, 3D printed sensor   | Detecting eating episodes   | [29]      |

Continued on next page

Table 3 – Continued from previous page

| Sensor location | Sensor type                               | Details  | Reference |
|-----------------|---|--|-----------|
| On body parts   | Acceleration, gyroscope, magnetometer     | Recognition of individual daily activities include: kitchen work activities, household cleaning activities, office-work activities, laundry activities, and watching TV activity | [38]      |
|                 | Surface electromyography                  | Recognizing ADLs activities include: stand-to-squat, squat-to-stand, stand-to-sit, sit-to-stand, stair-ascending, stair-descending, and walking                                  | [167]     |
|                 | Acoustic, electromyography, microphone    | Eating detection include: eating, talkings, silence, coughing, laughing, sniffing, deep breathing, and drinking  | [13]      |
|                 | Proximity, motion, sound                  | Detecting proximity, movement, and verbal interaction between people   | [152]     |
|                 | Infrared proximity                        | Detecting eating activities include: talking, silent, eating, and walking  | [11]      |
| On object       | PIR motion                                | Activity recognition for five different activities in four house rooms   | [103]     |
|                 | Ballistocardiography (BCG)                | Classification of sleep stages   | [45]      |
|                 | Radar                                     | Human activity recognition include: walking, jumping, jumping jacks, squats, and boxing  | [140]     |
|                 | Smart plug                                | Recognizing ADLs activities include: dishwasher, hair dryer, iron, oven, and washing machine   | [43]      |
|                 | 3-axis accelerometer, dual-axis gyroscope | Occupant identification include: knock, opening/closing door, fridge, cabinet drawer, window, pulling a towel from the towel dispenser   | [50]      |
|                 | Pressure                                  | Posture detection include: proper sitting, lean left, lean right, lean forward, and lean backward  | [98]      |
|                 | Photosensor                               | Activity sensing for location differentiation, detecting open doors  | [55]      |

### 2.3 Detecting Various Phenomena within Buildings

Sensors are being used to help facilitate the automation of various tasks, such as monitoring the energy use of a building, allowing for energy conservation. Studies conducted by Fiebig et al. [41] and Pratama et al. [120] used power meters, BLE beacons, and air quality sensors to detect occupancy in buildings. Occupancy is also predicted by [141] using very low-resolution heat sensor data to predict occupancy in smart office spaces. They have proposed two workflows one is based on computer vision, and the other on machine learning. Sensors are also used in health applications in smart buildings. It improves building occupants' safety and living conditions using various sensors such as temperature, humidity, and noise. For example, sensors can detect irregularities in the building, such as high levels of CO<sub>2</sub> and dust particles. Also, detecting abnormal behavior, such as fall detection [66].

Managing smart buildings using sensors, IoT, and other technologies allows for recognizing potential risks and improving the overall building management experience. A study by Sembroiz et al. [134] optimized energy consumption within the building. They proposed a model that assigns the optimal location for sensors and gateways in the building while maintaining sensor coverage and protection within the building. Another study by Das et al. [31] in an educational building uses a 3D camera to recognize activities and space utilization. The testbed was a cafeteria hall, a shared space inside a university building, and the derived patterns were used to assist building managers in making informed judgments about space allocations that were properly matched with actual building use. Luo et al. [95] proposed a radar sensor network to recognize 15 human activities in the kitchen; they have collected the radar signals and they were able to reach 89% recognizing accuracy most of the time. Table 4 demonstrates different phenomena detected within buildings using sensors across various research studies.

### 2.4 IoT with AI in Smart Buildings

IoT and Artificial Intelligence (AI) are disruptive technologies that have revolutionized data use. IoT devices can include sensors, home appliances, and medical devices. Table 7 presents IoT and AI-based data analytics used for various smart building activities.

IoT Intelligence offers various functions for data processing and decision-making, using edge, fog, and cloud layers. Edge computing involves deploying computing resources closer to the source of data collection, allowing for faster data processing. This is particularly useful for instances such as autonomous vehicles, where latency can be critical. Fog computing is involves use of resources

between the IoT devices and the cloud data center, often hosted on network components (such as routers and switches). The cloud layer can store and analyze large amounts of data, providing an additional layer of security and scalability for IoT devices. This is done through a network of connected IoT devices that can communicate with each other and remotely access powerful computing resources [112].

AI can be used to interpret data in near-real time, allowing for more intelligent decision-making. Combining IoT with AI-based data analysis is further enhanced; autonomous vehicles, for example, can make decisions quickly and accurately based on information gathered from their sensors and the environment around them, allowing them to move safely through their surroundings. However, such integration also introduces additional challenges, e.g. smart building systems must be able to integrate with existing infrastructure, which can be a challenge due to the complexity of existing systems, which requires extensive testing and debugging to ensure that the system is functioning correctly. Scalability is another key factor, as AI algorithms must be able to process large amounts of data quickly and efficiently. Security is also a key requirement, so data must always be encrypted and securely shared and processed [33, 112].

Reducing computational costs is also essential, as data processing in smart buildings can vary greatly depending on system complexity. Computational costs and energy usage will increase significantly with more complex analytics, such as real-time energy optimization and predictive analytics. Therefore, more research is needed to optimize the computational cost, e.g. Ostadijafari et al. [113] proposed an optimization approach that can successfully optimize electricity costs in commercial buildings by using occupancy information. More details about challenges are in technical challenges section 5.1.

Table 4. Different phenomena to detect within buildings using sensors

| To understand                              | Sensors used   | Datasets used  | Existing work  |
|--|--|--|--|
| Occupancy (sensing, counting, estimation)  | Heat, air quality sensors, temperature, humidity, light, CO <sub>2</sub> , Wi-Fi probe-sensing, camera, PIR, millimeter-wave radio, power meters, BLE beacons sensors  | LBNL Building 59 [96], RO-BOD [149], LANGEVIN [77]         | [141],[161],[44],[120],[158],[135],[108],[41],[125],[170],[49]     |
| Activity (sensing, recognition, detection) | Temperature, humidity, illumination, CO <sub>2</sub> , air quality, Wi-Fi probe-sensing, camera, radar, infrared array, fiber bragg grating, PIR, power meters, BLE beacons, geophone, electric field, 3-axis accelerometer sensor                 | HASC-PAC2016 [56], OPPORTUNITY [130], UT Smoking [138]     | [115],[161],[48],[132],[120],[82],[158],[63],[135],[81],[108],[41] |
| Group activity (recognition, detection)    | BLE beacons, web-cam, sound, Wi-Fi-based indoor location, microphone, acceleration, smartphone sensors   | PPS grouping [165], UT Smoking [138], ActivityNet [16]     | [60],[22],[164]  |
| Activities on a room-level within building | Infrared array, camera, 3D camera, doppler motion, millimeter-wave radio, infrasound, Radio Frequency Identification (RFID), CO <sub>2</sub> sensor  | OPPORTUNITY [130], PPS grouping [165], PAMAP2 [128]        | [106],[105],[177],[49],[70],[7],[84]                               |
| Building energy consumption                | PIR, temperature, humidity, illumination, CO <sub>2</sub> , accelerometer, gyroscope, magnetic, GPS, proximity, pressure sensor  | KAG-energydata [17], LBNL Building 59 [96], CU-BEMS [118]  | [132],[63],[166],[73]  |
| Building indoor environmental quality      | Temperature, humidity, illumination, sound, carbon monoxide (CO), CO <sub>2</sub> , formaldehyde, particulate matter 2.5 (PM <sub>2.5</sub> ), particulate matter 10 (PM <sub>10</sub> ), total volatile organic compounds (TVOC), pressure sensor | LANGEVIN [77], CU-BEMS [118], ROBOD [25],[122],[168] [149] |  |

## 2.5 Smart Building Use Cases

Smart buildings make use of IoT and AI to better manage their facilities, e.g. to monitor, control, and optimize the operations of a building. Berkeley Connected Campus is an example of a use

case using technologies in smart buildings. It is an initiative by the University of California to connect different parts of the University using smart and IoT technologies to develop a connected campus environment. These technologies are intended to improve student engagement and learning, improve pedestrian safety, and keep up with new advancements in transportation [1].

The *edge building* is an example of a sustainable office building in Amsterdam, focusing on being more efficient, comfortable and environmentally responsible for the occupants. The building, designed with a distributed system, uses sensors to monitor the environment and adjust settings accordingly. This system can modify parameters such as room temperature and air quality, consuming less energy while maintaining a comfortable environment. Occupants in the building can use a Mobile App to control their environment and access services [59].

A study was conducted to explore the role of sensor toolkits in current auditing by facilities managers (FMs) who often have limited access to the infrastructure and insufficient existing data sources. The toolkit can be repurposed and retrofitted. An online tool was developed to generate reports from sensor data. The study's findings demonstrate that the fine-grained data enabled FMs to understand building efficiency and generate actionable suggestions for improvement [42].

Sint-Maarten Hospital in Belgium enables automated building management, improved energy efficiency, and better security. The adopted approach has been used to adjust the temperature and lighting levels in response to the number of people in a given space. It allows for better security by detecting motion and informing security staff. The hospital also uses sensors to detect when lights are on in unused rooms to reduce consumed energy and carbon footprint. This allows patients to control various functions of their rooms and improve communication with staff [2].

### 3 ACTIVITIES WITHIN BUILDINGS

This section seeks to clarify the range of activities within buildings to allow a more effective analysis of activity recognition approaches. Figure 3 shows the hierarchy of activities within a building.

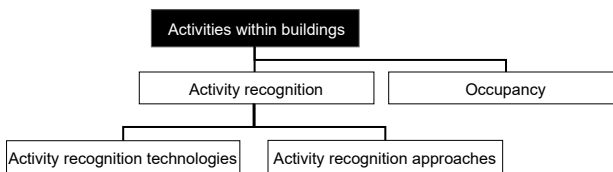


Fig. 3. Hierarchy of activities within buildings.

#### 3.1 Occupancy

Building occupancy information is essential for several aspects of building management, including assessing energy consumption and indoor environmental quality. According to Iea [57], buildings and construction sector account for about a third of all global energy consumption and nearly 15% of CO<sub>2</sub> emissions; these numbers are anticipated to increase further in the next few years. This section examines the concept of occupancy sensing. Figure 4 shows the hierarchy of occupancy.

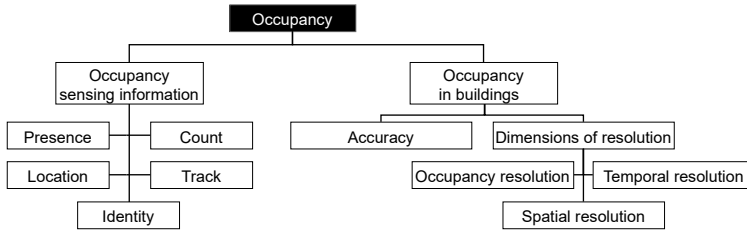


Fig. 4. Hierarchy of occupancy section.

**3.1.1 Occupancy sensing information.** This can be classified based on five key properties: presence, count, location, track, and identity [148].

- **Presence.** This provides information about occupants present or absent within a given area. Occupant presence detection is used widely across various applications, including lighting control and alarm systems.
- **Count.** This provides information about the number of people in a particular area. It is also used to count the number of individuals going into or out of the given area. It is thus used in applications requiring more details about occupancy status, such as adjusting energy consumption based on occupancy numbers, e.g. in shopping malls.
- **Location.** This provides information about the current location of occupants inside a given area. The location of occupants can be used across many different applications, including healthcare and energy management applications.
- **Track.** This provides information about occupant movements between different areas. It can be used in applications such as improving emergency evacuation processes and tracking and identifying intruders in monitored areas.
- **Identity.** This provides information about occupant identity to help distinguish between different occupants, using trained algorithms to identify specific features about occupants such as facial features or smartphone MAC address. The identity of occupants can be used in security applications such as occupant access control and surveillance. However, increasingly this introduces additional challenges associated with privacy of individuals.

**3.1.2 Occupancy in buildings.** This comprises two aspects: accuracy and dimensions of resolution. Accuracy relates to the distance between the measured value (data collected from sensors) and the ground truth data [101]. The greater the distance between the measured value and ground truth data, the lower the occupancy detection accuracy, and vice versa. The occupancy dimension focuses on three main features, which lead to different levels of resolution:

- **Occupancy resolution.** This indicates different occupancy levels, such as occupant presence or absence, calculating the number of occupants, identifying those occupants, and identifying occupant activities within the building.
- **Temporal resolution.** This represents the different frequencies over time (seconds, minutes, hours or days) of events taking place.
- **Spatial resolution.** This represents the building structure, including rooms, floors, ceilings and the building as a whole.

Table 5 shows occupancy information types with different spatial resolutions and the relevant sensors used within buildings.

Occupancy information can also be used in different applications inside the building. Lau et al. [79] conducted a study to analyze spatial and temporal urban space utilization using a specially designed Renewable Wireless Sensor Network (RWSN), highlighting a few interesting observations,

Table 5. Occupancy information types within smart buildings.

| Occupancy resolution | Spatial resolution | Used sensors  | References  |
|----------------------|--------------------|---|---|
| Presence             | Building           | CO <sub>2</sub> , PIR, temperature, humidity, illuminance, VOC, pressure mat, light dependent resistor, sound   | [35],[157],[85]   |
|                      | Floor              | CO <sub>2</sub> , PIR, double-beam, acoustic, pressure mat, Wi-Fi   | [47],[178]  |
|                      | Room               | CO <sub>2</sub> , PIR, door switch sensor, temperature, humidity, pressure, double-beam, doppler sensor, camera, acoustic, pressure mat, light, sound, microphone, Wi-Fi  | [177],[64],[179],[85],[178],[137],[170],[67],[10],[116]       |
|                      | Zone               | CO <sub>2</sub> , PIR, distance sensor, chair sensor, microphone, light, humidity, emperature, infrared camera, Wi-Fi   | [8],[102],[67],[10],[137]                                     |
| Count                | Building           | CO <sub>2</sub> , PIR, temperature, humidity, pressure  | [19], [61]  |
|                      | Floor              | CO <sub>2</sub> , PIR, electricity load meters, double-beam, acoustic, pressure mat, lighting, gas detection sensor, Wi-Fi  | [163],[52], [178]   |
|                      | Room               | CO <sub>2</sub> , PIR, heat sensor, camera, temperature, humidity, pressure, ultrasonic, infrared proximity, BLE beacons, power meter, doppler radar, thermal tripwire, chair sensor, light, sound, door switch sensor, RFID, Wi-Fi | [68],[127],[28],[120],[172],[26],[178],[153],[170],[67],[171] |
|                      | Zone               | CO <sub>2</sub> , PIR, velocity, temperature, humidity, light, radio, sound, RFID, microphone, long-wave infrared thermal camera, 3D stereo vision camera, Wi-Fi  | [125],[31],[28],[8],[102],[36],[67],[171]                     |
| Identity             | Building           | Wearable wrist sensor, passive RF sensors, load sensor  | [89],[72]   |
|                      | Floor              | Wi-Fi   | [47],[99]   |
|                      | Room               | BLE beacons, Wi-Fi  | [10],[99]   |
|                      | Zone               | 3D camera, Wi-Fi  | [31],[10]   |

on hot days, morning and evening periods showed the highest space utilization, while on cloudy days, the afternoon and early evening had higher space utilization. Clear days also showed higher space utilization at night; overall, mornings demonstrated higher space usage rates than evenings. In addition, the weather was shown to have a considerable impact on how people utilise outdoor space. Moretti et al. [104] conducted a study to enhance maintenance operation tasks inside a building. Data of occupants were collected using ultrasonic sensors, which were then processed and connected to the building maintenance strategy. The system issued a maintenance notice to the contractor when a specified threshold was reached, telling the contractor to begin cleaning. Other studies, including Balaji et al. [10], Martani et al. [99], and Thanayankizil et al. [150], have focused on energy saving applications in various building environments.

### 3.2 Activity Recognition

Activity recognition plays a significant role in smart buildings and represents a means for acquiring and collecting data about activities inside a building. This data helps control various applications and enhances the comfort levels inside the building, by controlling aspects such as energy consumption, temperature control, and safety. Further, single user activity refers to any activity undertaken by an individual user, such as working on a computer in an office. Prastika et al. [119] and Cui et al. [30] focused on single-user activity recognition. Multi-user activities are activities of more than one user in the same location, such as where employees work on different tasks in the same office. Tan et al. [145] and Alhamoud et al. [5] sought to recognize multi-user activities.

Group activities refer to the same task or related sets of tasks by more than one user at once, such as an employees meeting in a conference room. Tang et al. Tang et al. [147] and Tang et al. [146] performed activity recognition research specifically on group activity. Li et al. Li et al. [83] classify hybrid activity as a combination of individual and group activities happening at the same

location, such as two employees working on the same task while a third one is working on a different task in the same office. Other research studies [54, 107] have attempted hybrid activity recognition. Figure 5 illustrates various user activities classifications in a smart building.



Fig. 5. Various forms of human activity recognition inside a building, including single, multi- user, group, and hybrid activity recognition.

**3.2.1 Activity Recognition Technologies.** Approaches and technologies to identify activities in a building can also be classified, e.g. Chen et al. [24] classified activity recognition into two main approaches based on the sensor type used: vision-based activity recognition and sensor-based activity recognition. Each approach has various technologies supporting it and the purposes for which it is best used. This paper mainly focuses on sensor-based approaches to identifying human activities. Figure 6 shows a taxonomy of activity recognition technologies.




Fig. 6. Taxonomy of activity recognition technologies.

- **Vision-Based Activity Recognition.** Vision-based technology generally depends on visual devices other than sensors to identify activities, such as cameras. Most of its applications are thus related to computer vision-based approaches across areas such as virtual reality, video surveillance, human-computer interaction (HCI), home monitoring and security [133]. However, it faces some obstacles regarding human activity recognition, including privacy and security issues. Further, many cameras rely on specific lighting to identify and recognize human activities [53]. This research thus focuses on the other type of human activity recognition, sensor-based approaches, due to the increased availability of this data type in most smart buildings and the reasonable price of the used sensors.
- **Sensor-Based Activity Recognition.** This type of technology depends on using various sensors to recognize human activity. Data is collected from scattered sensors and then processed simultaneously to detect and recognize human activities. The sensors used are often very reasonably priced due to the extensive development of such technology, especially when linked with other technologies such as IoT. The sensor-based approach can also be applied across multiple different domains, and it has also been used in healthcare, security, object detection, and multiple other applications [91, 160].

Table 6 shows sensor types activities identified within smart buildings, and activity recognition in the table can be defined as the ability to recognize what type of activity it is, e.g. whether a human is walking, standing, eating, etc., while activity detection is about determining whether something is there or not. Some sensors in the table can be applied to various activities, while others are most suitable for focusing on certain activities within a building.

The sensor-based approach can be classified into three groups: wearables-based sensing, embedded sensing, and dense sensing [24]. Wearable sensors are attached to a person to recognize their activities: several studies have been conducted on wearable sensors to recognize human activities. Jalal et al. [58] and Kerdjidi et al. [66] focused on healthcare and fall detection, while Koskimäki et al. [74] focused on detecting specific medical conditions such as migraine attacks and spasticity. Chun et al. [29] and Bi et al. [13] focused on detecting eating activities using data gathered from wearable sensors positioned on the body, including neck and ear.

The second type of sensor used is object sensing, which is based on objects with sensors, such as smartphones, that users operate daily, collecting data about users to facilitate recognition of their activities. Vaughn et al. [155], Hassan et al. [51], and Yin et al. [174] all used smartphone sensors recognising and detecting human activities such as walking, standing, running and similar movements. Other activities detected by using smartphone sensors include driving activities and group activities [22]. Further, sport-related activities, hand activities [78], stress [139], and sitting [100] are more commonly assessed using smartwatch sensors.

The third type is dense sensing, which differs from the other two types because it is not controlled or carried by a user. Instead, it relies on sensors placed around the user's location to recognize and detect user activities in that location. Various studies using this type of sensor includes studies on user activity detection [87, 173], occupancy sensing and prediction [115, 161], indoor positioning and localization [93, 124], recognizing collaborative [164] and group [60] activities, abnormal activities detection [60], and detecting location-based activities, such as activities happening in the kitchen [95] and sleep stages[45].

Wearable sensors and object/ embedded sensing methods have the drawback that they may not always be functional. For example, wearable sensors require users to wear them; some users may find them uncomfortable. Object sensing similarly requires the user to use specific objects to recognize activities. The dense sensing technique eliminates these obstacles and allows the user to carry out daily activities naturally; however, this technique still faces obstacles with data collection processes, as ground truth data intersecting with the environment may produce noise in data [53].

Another area for improvement when using sensors is reliability and availability. Sensor reliability can be improved by selecting the most appropriate sensor for a given application. Sensor availability can be improved by choosing a reliable power source and a backup source. Sensors should be regularly checked and maintained while maintaining sufficient communication range.

- **Multimodal Activity Recognition.** This type of detection uses a combination of vision and sensor-based techniques for activity recognition. Such combinations can improve activity recognition reliability, accuracy and robustness. They may also reduce the required cost and effort. Wearable cameras have been the subject of research recently, as these need not be set in a fixed place like regular cameras [40]. Combining wearable cameras and sensors can thus provide more valuable information than wearable sensors alone. However, this combination may cost more and be more complex than applying either technology separately [40]. Various studies on multimodal activity recognition have combined vision and sensor technologies to improve recognition. Muthukumar et al. [105] detected a range of human activities, such as walking, standing, falling, sitting, lying and action changes, using a camera in conjunction with a low-resolution infrared array sensor. Detection of eating activities was performed by Thomaz et al. [151], who classified food intake gestures using cameras and wrist-mounted commodity sensors.

Table 6. Sensor type activities identified within smart buildings

| Sensor                | Activities identified                         | References                  |
|-----------------------|---|-----------------------------|
| PIR                   | Occupancy sensing, estimation, and counting   | [44],[158],[135],[153],[52] |
|                       | Abnormal activities detection                 | [97],[132],[23]             |
|                       | Recognizing activities of daily living        | [103]                       |
| CO2                   | Occupancy sensing, counting and prediction    | [161],[63],[108],[7]        |
| Temperature           | Occupancy sensing and prediction              | [161],[63],[108]            |
| Humidity              | Occupancy sensing                             | [63],[108]                  |
| Light                 | Occupancy sensing                             | [108],[63]                  |
| Wi-Fi                 | Occupancy estimation, counting and prediction | [8],[163],[161]             |
| Infrared array        | Activity recognition and detection            | [87],[173],[106]            |
|                       | Occupancy estimation                          | [127]                       |
|                       | Object detection and tracking                 | [48]                        |
| Proximity             | Activity detection                            | [152],[11]                  |
| Proximity             | Detection of movement and verbal interaction  | [152]                       |
|                       | Recognizing eating activities                 | [11]                        |
|                       | Human activity detection                      | [126]                       |
| Pressure              | Human posture detection                       | [98]                        |
|                       | Occupancy estimation and prediction           | [26],[116]                  |
|                       | Recognizing collaborative activities          | [164]                       |
| Sound                 | Occupancy sensing and prediction              | [36],[116]                  |
|                       | Occupancy prediction                          | [141]                       |
| Radar                 | Occupancy estimation                          | [172]                       |
|                       | Activity recognition and detection            | [115],[95],[82],[81]        |
|                       | Occupant identification                       | [50]                        |
| Accelerometer/3-axis  | Activity recognition and detection            | [58],[81],[51],[174],[73]   |
|                       | Occupant identification                       | [50]                        |
|                       | Activity recognition and detection            | [58],[51],[80],[100]        |
| Magnetometer          | Activity recognition and detection            | [66],[154],[80],[38]        |
| Electrocardiogram     | Activity recognition and detection            | [66],[154]                  |
| Electromyography      | Activity recognition and detection            | [167],[13]                  |
|                       | Activity recognition and detection            | [120],[22]                  |
|                       | Occupancy detection                           | [120]                       |
| BLE beacon            | Indoor positioning                            | [124]                       |
|                       | Recognizing teamwork activities               | [84]                        |
|                       | Occupant identification and detection         | [49]                        |
| Millimeter-wave radio | Indoor positioning                            | [71]                        |
|                       | Activity recognition and detection            | [110]                       |

Chen et al. Chen [23] conducted research to detect suspicious activities in volatile areas using a camera, a motion sensor, an infrared sensor and an alarm module, while activity recognition and occupancy sensing using a camera and wireless sensors were performed by Zhao et al. Zhao et al. [177] to recognize activities such as walking into a room, sitting in a chair, lying on a bed, or turning over in bed. Occupant office counts were conducted by Arendt et al. Arendt et al. [7] using 3D stereo vision cameras and CO2 sensors. Further, occupancy prediction to improve building energy efficiency conducted by Wang et al. Wang et al. [161] employed a camera and a variety of sensors.

**3.2.2 Activity Recognition Approaches.** Human activity recognition has relied on data and knowledge driven approaches, including a hybrid approach [142]. Figure 7 shows the taxonomy of activity recognition approaches that may be used to create effective activity models. These models help with inferences around human activities, but each approach has benefits and drawbacks for creating an

activity model. Before selecting an approach, it is thus important to understand what human activity recognition entails and what makes starting a model with high accuracy particularly challenging.

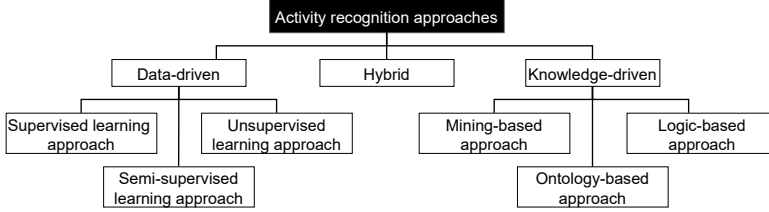


Fig. 7. Taxonomy of activity recognition approaches.

The activity recognition process involves creating models that can precisely and effectively recognize human activities. To achieve this, it is essential that the same actions are performed in the same order each time the activity is undertaken. For example, making a cup of coffee may require the user to put on a kettle, find a cup, add water and ground coffee to a cafeteria, and then brew the coffee before pouring it – comprising a set of sequential steps that make up the activity of making coffee. However, other aspects can affect the model recognition process, such as the order of actions or the amount of time it takes to perform each action. This may result in the necessity for multiple models to account for these changes effectively. Thus, it is important for the optimal model to work in a dynamic environment and recognize different human activities as they occur [142]. To do this, the model must be able to process various inputs and precisely provide accurate outputs.

Recognizing human activities begins with activity modeling, a process used in software and systems development to model the activities that take place during the design and engineering of a system. Activity modeling analyzes user needs, uncovers problems, and identifies potential solutions. It uses data from various sources like sensors and cameras to identify user activities and patterns [24]. The data is then used to recognize and predict future activity patterns, which can be done using a data drive, ML-based approach, or rule-based control technique. Further, challenges with activity recognition approaches such as scalability and re-usability will be mentioned in each approach separately below.

- **Data-Driven Activity Recognition Approach.** This approach follows the process of creating an activity model from a collected dataset of users, applying different ML and data mining techniques as required. Although these may adopt different processes such as training and learning, this classification process of human activities is based on using statistical and probabilistic methods to infer user activities [24].

This approach can thus produce models that can handle time-variant and stochastic information, being the opposite of knowledge-driven approaches, which are inappropriate for such work. However, a data-driven approach has some drawbacks: it requires collection of data for training and learning processes, and it is thus subject to issues of data scarcity: when the data is limited, or there is not enough labeled data, training may fail. There is also a re-usability problem, as the model produced for one user may be difficult to reuse with another [24].

Activity recognition approaches produce activity models using a data-driven approach, applying ML techniques. These ML techniques can be classified as supervised, unsupervised, and semi-supervised. The supervised learning approach is used chiefly for activity recognition. The supervised technique trains the model by using labelled data; the model should then be able to classify incoming unlabeled data by activity type using a generative, discriminative, or hybrid approach.

The generative approach uses probabilistic models, such as Naive Bayes and Gaussian Discriminant Analysis (GDA) algorithms, to categorize data after determining how those data were generated, while the discriminative approach categorizes given input data and then uses models such as Linear regression and Support Vector Machine (SVM) algorithms. Further, Deep neural networks (DNNs) are a powerful type of AI algorithm that can analyze complex data sets and recognize patterns. They are made up of multiple layers of neurons, with each layer responsible for a different processing task. DNNs have proven highly effective in face and object recognition.

Transfer learning is another ML technique where the model uses the knowledge it acquired from previous tasks to train for new tasks without spending much time and resources. It is used with applications such as natural language processing (NLP) and image recognition [129]. In addition, multimodal learning is an ML technique that uses multiple input modalities to process data. This is important due to the increase in unstructured data, such as images and videos, which are difficult to process with traditional models. It combines multiple data sources to produce a more detailed representation compared to what can be achieved with a single modality. For example, face recognition algorithms can use images and audio to better identify faces.

The one-shot learning technique allows the system to learn from a single example or experience. It can be helpful for tasks that involve recognizing or classifying new objects that the AI system has not seen before. Few-shot learning is similar to one-shot technique, where the models are trained using a few examples. It helps provide models that can quickly learn new tasks when large datasets are unavailable. It works by training models on meta-learning algorithms designed to learn from a few examples and apply them to new tasks. For example, a model can use an instance of a dog to learn how dogs are classified in other images [162]. Table 7 demonstrates the main analytics methods used to identify activities in smart building.

- **Knowledge-Driven Activity Recognition Approach.** This approach uses prior knowledge to make activity models based on various knowledge and management techniques. This process involves knowledge acquisition, representation, implementation, verification and validation. The approach is considered more robust to noise than data-driven approach semantically, logically straightforward, and easy to interpret. However, it is ineffective when handling time-varying or uncertain information, generating only static models [24]. The structure of knowledge in such models can be represented in different ways, such as networks, rules, or schemas. Overall, the approach may be classified into three main based types: mining, ontology, and logic-based.

Mining activity knowledge from public data sources to create an activity model is a valuable approach that many organizations can benefit from. By leveraging public data sources, companies can gain insight into the context of their customer activities, the types of activities people engage in and identify associated trends. This can improve customer experience, marketing campaigns, and more effective product usage.

Mining-based and data-driven approaches are similar in terms of using statistical and probabilistic models for activity recognition. However, a data-driven approach can still generate a personalized model, which a mining-based approach cannot. In contrast, mining-based approaches can determine a model's parameters to avoid the data scarcity problem seen in data-driven approaches [24].

The ontology-based approach involves using a set of facts and tools to create an organized and logical conclusion model. This approach relies on using ontologies to represent the knowledge in a computational form. It helps with the reusing and sharing models and technologies.

Table 7. Activities identified, sensors, analytics used, and IoT roles in smart building environment

| Activities identified                 | Sensor type  | Analytics used  | IoT roles   | Reference |
|---------------------------------------|--|---|---|-----------|
| Activities recognition and detection  | Pressure, stretch, and accelerometer                     | k-Nearest Neighbors (K-NN), Decision Tree (DT), and Support Vector Machine (SVM)  | The sensor data was collected and stored on a Flora board and then processed in a PC to classify normal and violent human actions   | [126]     |
|                                       | Thermopile imaging array                                 | Connected domain extraction algorithm and Feature point localization              | The sensors output sequential images are sent to a Raspberry Pi to analyze and detect three elderly activities: rest, fall, and movement  | [87]      |
|                                       | Tri-axial inertial sensor                                | Genetic Algorithm(GA), DT, and SVM  | The sensor data was collected and stored on Arduino Uno and then processed in a PC to detect physical activities from different datasets  | [58]      |
| Occupancy sensing                     | Temperature, humidity, CO <sub>2</sub> , and Wi-Fi probe | k-nearest neighbors (kNN), SVM, artificial neural network(ANN)                    | Sensor data is stored locally and WiFi data is sent to the cloud. The data is fused to predict occupancy and improve energy efficiency  | [161]     |
|                                       | Accelerometer and gyroscope                              | SVM   | The sensor data was fused and stored on Arduino Uno for different objects to identify different occupants in the smart home   | [50]      |
|                                       | Plug-load meters and PIR                                 | K-means clustering  | The sensor data was collected and transmitted from Raspberry Pi to an external server to estimate individual occupancy in office spaces   | [135]     |
| Indoor positioning                    | Temperature, humidity, light, and pressure               | xgboost, Random Forest (RF),DT, LightGBM, and Gradient Boosting Classifier (GBDT) | Sensors data was collected using an Arduino board, and the board uploaded the data to an external server for visualization and enable accurate indoor location  | [46]      |
|                                       | BLE beacons  | Trilateration algorithm   | The Beacons sensors transmit the BLE signals to estimate the occupant's position, Arduino Mega and the smartphone are used to track the position, and then the data was sent to an external server for analysis   | [18]      |
|                                       | Wearable wristband and smart phone                       | Fuzzy logic and genetic algorithm   | Designed wristbands are used to receive the Received Signal Strength Index (RSSI) strength, and the corresponding MAC address is then sent to the cloud server, and then the server calculates and analyzes the received data for indoor positioning in an smart hospital environment | [21]      |
| Building energy consumption           | Temperature, light, PIR, and MQ-2 gas                    | Proposed lighting control algorithm   | The sensor data was collected by the Arduino Mega board, the board controlled the lights in the house to reduce energy consumption  | [20]      |
|                                       | CO <sub>2</sub> , temperature, and humidity              | Model predictive control (MPC), and long short-term memory (LSTM)                 | Sensors data was collected and stored in a Raspberry pi. Then the data was sent to a remote ThingsBoard platform to control smart building ventilation predictively while enhancing energy efficiency   | [69]      |
|                                       | Temperature, humidity, CO <sub>2</sub> , and Wi-Fi probe | k-nearest neighbors (kNN), SVM, artificial neural network(ANN)                    | Sensor data is stored locally and WiFi data is sent to the cloud. The data is fused to predict occupancy and improve energy efficiency  | [161]     |
| Building indoor environmental quality | CO <sub>2</sub> , temperature, and humidity              | Model predictive control (MPC), and long short-term memory (LSTM)                 | Sensors data was collected and stored in a Raspberry pi. Then the data was sent to a remote ThingsBoard platform to control smart building ventilation predictively while enhancing energy efficiency   | [69]      |
|                                       | Particulate matter (PM), temperature, and humidity       | On-Off Control  | The sensor data was collected by the Arduino Pro Mini board and sent to a Raspberry Pi server for processing, and then the data was sent to the ESP8266 board to monitor and control the air quality in the building  | [169]     |
|                                       | Temperature, humidity, and gas sensor                    | Neural network (NN), NaïveBayesian (NB), KNN, SVM, and RF                         | Sensor data was collected using an Arduino board and then sent to a PC for monitoring and predictive characterization of air quality  | [6]       |

Comparing this approach with the logic-based approach shows that both use the same techniques in terms of activity model recognition. However, the ontology-based approach has more access to rich resources, being supported by research in a semantic web, with resources such as APIs and advanced tools used to carry out tasks related to ontology-based approach activity recognition [24].

The Logic-based approach uses various logical forms, such as facts, rules, and expressions, to derive information regarding context. This approach is different from the data-driven approach in terms of less reliance on a large dataset to create an activity model. The activity models are thus more explicit semantically and can use low-level context to extract high-level information. This approach retains some weaknesses in representing uncertainty and fuzzy information. One way to reduce uncertainty in the model is to use sensors in the building to collect data about the environment and occupant activity.

The data collected can create a more accurate and reliable model. Another possibility is to use ML algorithms that can analyze the sensor data and predict the occupants' behavior. Another area for improvement is that the activity model is not adaptable to different occupants' behaviors. It thus lacks reusability and applicability due to minimal standardization [24, 117].

- **Hybrid Activity Recognition Approach.** Each of the previously mentioned approaches has its limitations. The knowledge-based approach produces activity models that cannot capture all user activities, and both approaches have other weaknesses. Thus, a hybrid approach may select key features from each approach to producing a better activity recognition model. Several such features were identified in research by Sukor et al. [142], who found that using a hybrid approach eliminated the data scarcity problem known as the "cold start" problem. As there is no need for a large dataset for training and learning, they could model activities initially by incorporating knowledge approach techniques, the model then moved on to a learning process using data-driven reasoning. Another important feature of a hybrid approach is scalability, which allows a model to be used in different environments without specific training. This approach automatically learns and adapts general activity models based on the previous knowledge context.

However, there are some limitations to the proposed hybrid approach mentioned. One limit is that it does not support real-world activity scenarios that happen concurrently or work for more than one activity simultaneously. It can thus only be used to investigate consecutive or singular activities. Further, the proposed approach cannot differentiate whether used objects are relevant, arbitrary, or meaningless [142].

## 4 SMART BUILDINGS OBJECTIVES

The previous section reviewed smart buildings' capabilities for recognizing occupants and human activities. In this section, several important objectives that can be achieved using these smart building capabilities are thus outlined. Figure 8 illustrates some key smart building objectives that can be achieved using IoT technology combined with advanced analytics capabilities.

### 4.1 Occupant Localization Enhancement

This process aims to identify the location of an occupant or a device within the building. Occupant localization data is used mainly to facilitate navigation inside the building to reach the desired location [175]. Several technologies are used to measure occupant localization, including Wi-Fi-based indoor location, BLE beacons, and RFID detecting motion. Determining where occupants are located inside the building at a given time helps minimize energy consumption and costs based on occupant behaviors. It also helps to understand occupants' behaviors inside the building, which helps improve building facility design. Applications that may benefit from occupant location

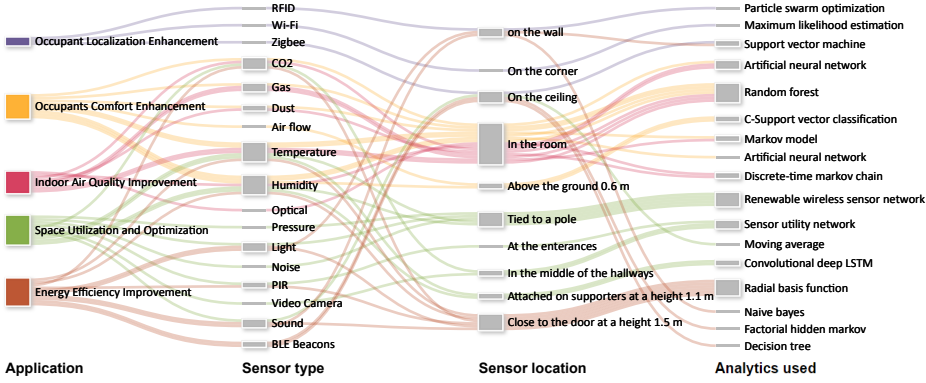


Fig. 8. Smart building objectives achieved by IoT technology combined with advanced analytics capabilities.

information within the building include energy consumption, improving safety, providing customer insights, and health systems.

The Global Positioning System (GPS) is the most common and popular location technology used in various applications. Despite its widespread use, GPS is limited in accurately locating occupants inside a building. To address this limitation, several other technologies have been developed and used for this purpose, such as Wi-Fi, Bluetooth, ZigBee, ultrasound, visible light, and Ultra-Wideband (UWB). Taking advantage of IoT technology and integrating it with such localization technologies may help enhance the accuracy of occupant localization and proximity detection within buildings [175]. A study that combined magnetic and visual sensors in the office building achieved 91% localization accuracy [124]. IoT technology can help by providing more precise information about the occupant's location using various sensors within the building, such as vision and pressure sensors. However, more research is needed on occupant localization applications due to the difficulties in their installation and maintenance.

## 4.2 Indoor Air Quality Improvement

Nearly 90% of people's time is spent inside of buildings [12]; maintaining indoor air quality is thus essential to improving people's daily lives. Indoor air pollution can affect productivity and work performance. Recent research conducted by Sun et al. [143] estimates that a yearly 5% reduction in work productivity could cost around 20 to 200 billion US dollars in loss across the global economy.

Indoor air quality can be measured using various sensors, such as CO<sub>2</sub>, temperature, humidity, and volatile organic compounds. Adopting IoT technology and advanced analysis can help monitor indoor air quality and improve work environments. Recognizing occupants' activities can also help in understanding different occupants' pollution activities that may affect indoor air quality. It is also essential to monitor indoor air pollutants to inform building occupants about critical or dangerous levels as required and to help facility managers make relevant decisions about improving air quality in the building. According to Qabbal et al. [121], such collected data could also be used to develop indoor air quality guidelines to support different aspects of improvement such as ventilation design and occupants satisfaction.

## 4.3 Space Utilization and Optimization

Modern building spaces are designed to allow various activities such as individual work, group work, meetings, and socializing. These modern designs help optimal use of the multiple spaces

within a building, yet there is often a lack of follow-up processes to measure the actual use of these spaces once a building is completed. Space utilization is measured in buildings using various sensing technologies such as infrared, motion, microwave, and video processing technologies.

Finnigan et al. [49] explored the role of the sensor toolkit in enhancing energy auditing practices in buildings: that study's findings showed that the fine-grained insights thus produced enabled facility managers to develop better knowledge of building efficiency that let them provide practical recommendations for improvement. Using IoT technology with various deployed sensors should help enhance space utilization within buildings, combined with advanced analytics to help develop an understanding of occupants' behaviors in different spaces to produce valuable insights.

Further, during the COVID-19 pandemic, smart buildings are equipped with technologies that can be used to monitor and enforce maximum room capacity. Room occupancy sensors can detect how many people are in a given area, ensuring that social distancing protocols are being followed. Longo et al. [94] proposed a prototype called Smart Gate that monitors people's flow in the building and track their occupancy. The system was placed on one side of the entrances and primarily used a pair of time-of-flight sensors to detect people entering and exiting.

#### 4.4 Occupants Comfort Enhancement

Occupants' comfort inside a building is one of the essential applications of smart buildings, as enhancing occupants' comfort helps to increase productivity performance and increases occupants' satisfaction levels. Various services can enhance occupants' comfort, mainly based on monitoring and controlling aspects of the indoor climate, including temperature, cooling, and noise levels. Occupant comfort can be affected by various variables, including air temperature, air quality, background noise, lighting, and other factors. Zhang et al. [176] sought to enhance building energy efficiency and occupants' thermal comfort by using a deep learning model in IoT-enabled buildings. The model proposed in their study achieved a high level of accuracy in a short period, based on finding the optimal value of the thermal comfort level for the occupants.

Different services can be monitored and controlled with the help of IoT devices and advanced analytics to be adjusted based on occupants' preferences and usage history. Acoustic sensors, for example, can detect particular types of noise, such as alarms or conversations, which can be useful for security and privacy purposes. Additionally, acoustic sensors can be used to detect the presence of people in a room, which can be used to trigger lights or other electronic systems.

#### 4.5 Energy Efficiency Improvement

Building Information Modeling System (BIMS) is a powerful tool for improving energy efficiency in buildings by monitoring and controlling energy consumption. BIMS utilizes various sub-systems to collect, store and analyze data related to the energy consumption of the building, such as heating, cooling, lighting, and plumbing systems. This data can then be used to identify energy-saving opportunities, such as turning off unnecessary lights or systems when not in use. Traditional energy meters are used to collect information about energy consumption in each space. However, they provide only limited data. With BIMS, more detailed information can be collected, including data related to the number of occupants and their known comfort preferences.

Building sensor data can be analyzed to create an Energy Efficiency Index (EEI) that shows how much energy is used in different building areas and compares it with other buildings' consumption. Analyzed data can reveal energy consumption patterns and help make decisions about energy optimization in the building.

Occupant-centric control (OCC) and automated energy system strategies can improve buildings' energy efficiency by reducing energy consumption and environmental impact. OCC utilizes occupant behavior and preferences to optimize energy systems. Automated energy system uses

sophisticated control algorithms to identify and implement energy-saving measures. The successful implementation of these technologies requires energy management systems, occupant sensing, and optimization software.

#### 4.6 COVID-19 introduced applications

The COVID-19 pandemic has changed the way we live. To keep people safe, many businesses have had to implement measures to limit the capacity of their spaces and enforce social distancing. This has resulted in the development of new technologies, such as sensors, cameras, and software applications, which are used to monitor the number of people in a room and their distance from each other. Fazio et al. [39] propose scalable indoor navigation systems to navigate the user inside smart buildings using BLE beacons and smartphones. The smartphone detects the user's position over time and suggests the best route to the destination.

The proposed system can be further enhanced using AI technologies to predict user movement. For example, if a user regularly visits the same location each day, the system can use this information to suggest the quickest route to that location. The system can also provide helpful information during the user's journey, such as directions, alerts, and information about nearby points of interest.

Buildings are also being used to provide a safer environment for occupants by utilizing technologies like digital signage, automated temperature checks, and automated ventilation and air conditioning systems. Buildings are also used to create a more efficient way of working and living by enabling occupants to access their workspaces remotely.

Implementing AI and ML technologies is being used to improve the efficiency and accuracy of operational processes in buildings. In addition, developers created new applications built on top of existing smart building infrastructure to provide additional safety measures and improved efficiency. For example, smart buildings can now be used to provide automated contact tracing so that buildings can quickly respond to any potential virus outbreaks. Similarly, they can be used to provide automated temperature checks and access control to ensure the safety of occupants.

### 5 CHALLENGES AND FUTURE RESEARCH DIRECTIONS

This section clarifies the previously discussed gaps in existing research and identifies some challenges that may direct future research directions. Section 5.1 discusses technical challenges, including privacy and security, selecting sensor types and dealing with data uncertainty, deploying sensors and computational power, and building heterogeneous data sources. In section 5.2, Human-Building interaction is discussed, identifying the challenges shared between humans and buildings, the difficulty of recognizing complex activities, the challenges in delivering the explanations needed by building facility managers, and the space utilization application challenges.

#### 5.1 Technical Challenges

**5.1.1 Privacy and Security.** Smart buildings are becoming increasingly popular with the advent of IoT and AI technologies, bringing greater convenience and control to people. These technologies also raise significant privacy and security concerns. Privacy is a major concern for smart buildings and their devices, as the data collected can reveal a lot about occupants' behavior and interests. This data can be misused without proper protection, which can have serious privacy implications.

Security is another challenge for smart buildings; as many connected devices are installed in a building, the possibility of system hacks, data breaches, and other malicious activities increases. In addition, the consequences of such events in a smart building can be more severe since great physical damage can be caused if the security systems are compromised. Therefore, it is crucial to ensure that smart building systems have robust security measures to protect them from potential threats. This can be done using advanced authentication mechanisms, encryption technologies,

firewalls, and other security protocols [155], [51]. Similarly, data protection policies should be adopted to ensure that personal data is not misused or abused.

Algorithmic bias is one of the biggest privacy concerns in AI technologies. Algorithms are only as good as the data they are trained on, and if that data is unbalanced or unevenly distributed, then the algorithms may produce biased results. Additionally, AI systems may not be transparent in their decision-making processes, making it difficult to determine why specific decisions were made and how they will affect people. It is also essential to limit access to the central AI systems that are used to control the building. AI systems often use sensitive data, such as user information, to make decisions. Therefore, access to these systems must be strictly controlled and monitored to prevent malicious activity. Further, it is essential to ensure the building itself is secure.

Buildings often combine different types of technology, such as facial recognition and motion sensors. This data must be securely stored and transmitted, and malicious actors must be prevented from accessing it [111]. IoT and AI in smart buildings offer numerous possibilities for creating energy-efficient, cost-effective, and comfortable living and working environments. With proper implementation, these technologies could revolutionize how people live and work in smart buildings.

**5.1.2 Choosing Sensors and Dealing with Data Uncertainty.** Smart buildings rely on the data collected by sensors to make decisions that increase efficiency and reduce costs. Choosing the right sensors is therefore crucial for a successful building system. When selecting sensors, such accuracy, reliability, and power requirements must be considered. Sensors should also be chosen based on the type of data they can collect.

Different sensors are required to measure various environmental conditions, such as temperature and light. It is important to ensure that the sensors selected are compatible with the system in which they will be used. After selecting sensors, the collected data could be unreliable. It is important to understand the sources of uncertainty in sensor data, which can be divided into measurement errors and environmental effects. The first arises from factors such as the device's accuracy and the second from external factors such as temperature and light.

In addition, optimizing the energy efficiency of sensors must also be considered. For example, a framework proposed by Liang et al. [88] could keep the energy consumption of IoT devices at almost half of what was previously consumed by optimizing the sampling frequency, communication, and the models used. Therefore, further research is needed to develop suitable sensors for use in different building areas, identify potential uncertainty sources in sensor data, and minimize their impact. In addition, research should focus on developing collaborative frameworks and advanced analytics tools to identify opportunities for energy savings and improved occupant comfort.

**5.1.3 Deploying Sensors and Dealing with Computational Power.** Once an appropriate combination of sensors is identified, those sensors must be used efficiently to obtain accurate information. Placing a sensor directly in the area of interest is the most commonly used means [106, 115], but this can be challenging since different sensors require different placement locations to offer accurate readings. For example, temperature sensors need to be placed away from windows and sunlight to provide accurate readings. Therefore, there is a trade-off between sensor locations within buildings.

Areas may have features that differentiate them from other areas in the building, so sensor placement and the number of sensors required based on those features must be considered. After deploying sensors, it is important to manage the computing power to run a building. The amount of power required depends on the complexity of the building, the number of connected devices, and the speed at which the data can be processed. IoT-enabled buildings require significant computing power and networking capabilities to manage data flows, analyze insights, and provide feedback.

Therefore, high-end servers, computers, and cloud computing solutions are required to run a smart building successfully. These solutions require high-speed networks, robust storage systems,

and strong security to ensure data is not compromised. In addition, AI is needed to automate the processes and allow the building to respond quickly. It is important to carefully consider the project's specific needs and assess the existing infrastructure and technologies. This includes evaluating the performance of existing hardware, the type of cloud services needed, and the availability of AI solutions. Considering all of these elements makes it possible to create a reliable and efficient building for all its occupants.

**5.1.4 Building Heterogeneous Data Sources.** Data collected from buildings can be used to improve energy-saving opportunities, occupant comfort, and other systems in the building. However, the data collected can be heterogeneous and complex, making it difficult to analyze. Collecting and analyzing building data presents many challenges. For example, it can be difficult to identify different sources of energy use and their relationship to one another. The data may not be reliable or accurate, making it challenging to measure the energy used by the building and its occupants.

The data collected from buildings can be challenging to interpret. This is because the data is often collected from multiple sources, making it harder to identify patterns and relationships between different factors. It can contain a large amount of noise, making it difficult to identify patterns or trends accurately. It also may need to be completed or updated to draw meaningful conclusions. To overcome these challenges, developing systems that can effectively store, process, and manage the data collected from buildings is essential. It helps ensure that the data is up-to-date and can be easily accessed and analyzed. Using advanced analytics tools and techniques to identify patterns, trends, and relationships could help in the process of collecting data.

## 5.2 Human-Building Interaction

**5.2.1 Sharing Information.** Sharing the information is achieved through communication between the two parties, buildings and humans; the communication process remains challenging; many buildings are still not augmented with sensors due to the additional costs and lack of perceived value. Further, sensor data alone is insufficient for this purpose: it must be combined with advanced analytics to obtain valuable insights that can support rational decision-making. In a research study by Finnigan et al. [42], sensor data was used to generate actionable recommendations for facilities managers regarding energy auditing practices in different buildings. According to Das et al. [31], understanding occupants' behaviors and Human-Building interactions can help enhance energy consumption and minimize building costs in many circumstances.

Smart building systems typically use a variety of communication protocols, such as CAN bus, Zigbee, Bluetooth, LoRaWAN, and more. One of the most commonly used protocols for communication between devices in a smart building is Zigbee, explicitly designed for low-power, low-data-rate applications and is highly secure, reliable, and power-efficient. Low-Power Wide-Area Networks (LPWANs) provide a cost-effective way to connect low-power, low-data-rate devices over long distances. With LPWANs, smart buildings can communicate and report data back to their central systems, allowing for greater flexibility and automation while reducing energy consumption. It is best suited for buildings that do not require large amounts of data to be transmitted. For example, LPWANs can be used in buildings requiring real-time energy consumption monitoring and environmental conditions.

LPWANs often have less throughput and coverage than other networks, such as Wi-Fi or cellular, leading to poor performance in some applications. It is typically more expensive than other networks due to the additional cost of building the infrastructure required to support the network. Due to their low-power nature, they are prone to problems, and these networks require more maintenance. Further, LPWANs can be an excellent option for specific applications in smart buildings, but it is important to be aware of the potential drawbacks before implementing them [15].

Successful communication can increase understanding of various building phenomena, such as occupants' productivity and comfort. Improving communication allows facility managers to make better-informed decisions regarding different phenomena in a building. Further, featured models of Human-Building communication with optimal chosen sensors and analytics will improve the communication and desired end results.

**5.2.2 Recognizing Complex Activities.** Understanding occupant activity is achieved by collecting sensor data and training an ML model to recognize activities. Static activities such as standing and sitting or dynamic activities such as walking and running all have movement ranges and produce recognizable sounds or vibrations that certain sensors can detect. Other complex activities may be harder to detect using sensors, it may be difficult to determine whether an occupant is watching a lecture or reading an e-book on a laptop.

Some activities can be easily recognized by applying vision-based techniques to monitor an occupant's activities, but these techniques have many drawbacks, including processing demand and lack of privacy. Several sensors can also recognize different activities sufficiently in isolation yet may find it challenging to recognize them when several things happen simultaneously at the same location.

There is a trade-off between the complexity level of the activity and the accuracy of recognition, especially when the activity is more complicated. More research is thus needed to efficiently recognise complex activities happening within smart buildings, as improved ML models and external data sources could improve this recognition accuracy.

**5.2.3 Supporting Facility Managers with Enhanced Data.** Data from sensors can be variable and difficult to interpret due to noise and missing data; Some sensors even have manufacturing defects that can affect readings. Facility managers often look for high-level explanations for various phenomena in a building. They need information such as building occupancy rates for different spaces in the building with different designs that allow facility managers to renovate or improve spaces to maximize occupancy rates.

The nature of currently used sensors makes it challenging to deliver the range and types of data needed by facility managers. More reliable data cleaning frameworks and recognition solutions are thus needed to improve the final outputs. These should handle missing, incorrect and irrelevant data and prioritize the most critical data for required purposes.

**5.2.4 Space Utilization.** Smart building are designed based on basic information available at the time of the design; however, this is generally insufficient to determine how different spaces inside the building will be used in practice or whether occupants will utilize them efficiently as designed. There is now a tendency to work outside of standard office buildings, based on current technological advances and improved means of communication.

Proposed solutions to optimize space usage have been developed previously by firms employing observers to take notes about occupancy in the building across different spaces over time [144]. This technique is inefficient and does not support flexible working practices such as hot-desking, it only detects occupancy at specific times rather than continuously throughout working hours. Currently, solutions have emerged based on vision-based and sensor-based technologies. Vision-based approaches that use cameras suffer from privacy and security concerns. Some also rely on outside lighting sources to identify occupants, making them prone to error.

Other solutions based on sensors can tackle issues regarding continuous occupancy detection while maintaining privacy. However, gathering continuous readings from sensors and understanding the nature of various building spaces remains challenging. The collected data can be affected by external sources, and occupants may act in ways that deliver inaccurate data about space utilization,

such as changing furniture locations, blocking sensors, or incorrect readings being generated by sensors due to their relative location to other objects.

More research is thus needed to understand how spaces are being used within buildings to help in reducing costs and to help designers and facility managers understand occupant's behavior when using these spaces [42]. The collected data can be transformed into insights that help designers and facility managers in making informed decisions.

## 6 CONCLUSION

Smart buildings are designed to provide occupants with tailored services, applications, and improved energy efficiency. Using Internet of Things technology (IoT) and data analytics, smart buildings can now provide building occupants with insights about their activities and behaviors, making the environment more efficient and cost-effective. This work provides a survey of sensors used in different building environments, focusing on sensor types and how they can be deployed. A review of activities that can be identified in smart buildings with these sensors and the appropriate analytics for activity recognition is also provided. Table 4 outlines the various types of sensors used in smart buildings. Table 6 provides further information on the activities that can be detected by each type of sensor. Figure 8 illustrates some key smart building objectives that can be achieved using IoT and data analysis. Although recent advances have made the concept of smart buildings much more accessible, there remain several challenges that limit their usage, such as added costs and a perceived lack of value. This work also identifies research challenges that must be addressed for smart buildings to become widely adopted, suggesting potential future research directions.

## 7 ACKNOWLEDGMENTS

Wael Alsafery's research is funded by the Saudi Arabian Cultural bureau in London, and his scholarship is granted by King Abdul Aziz University.

## REFERENCES

- [1] [n.d.]. Connected campus. Retrieved January 26, 2023 from <https://cto.berkeley.edu/innovation/connected-campus>
- [2] [n.d.]. Sint-Maarten Hospital, Belgium. Retrieved January 7, 2023 from <https://www.siemens.com/global/en/products/buildings/references/sint-maarten-hospital.html>
- [3] 2020. Global Smart Building Market Key Trends(2017-2024) - Market Size. <https://www.maximizemarketresearch.com/market-report/global-smart-building-market-key-trends/6854/>
- [4] Muhammad Raisul Alam, Mamun Bin Ibne Reaz, and Mohd Alauddin Mohd Ali. 2012. A review of smart homes—Past, present, and future. *IEEE transactions on systems, man, and cybernetics, part C* (2012).
- [5] Alaa Alhamoud, Vaidehi Muradi, Doreen Böhnstedt, and Ralf Steinmetz. 2016. Activity recognition in multi-user environments using techniques of multi-label classification. In *6th Conference on the Internet of Things*.
- [6] Timothy M Amado and Jennifer C Dela Cruz. 2018. Development of machine learning-based predictive models for air quality monitoring and characterization. In *TENCON 2018-2018 IEEE Region 10 Conference*. IEEE.
- [7] Krzysztof Arendt, Aslak Johansen, Bo Nørregaard Jørgensen, Mikkel Baun Kjærgaard, Claudio Giovanni Matterna, Fisayo Caleb Sangogboye, Jens Hjort Schwee, and Christian T Veje. 2018. Room-level occupant counts, airflow and co2 data from an office building. In *Proceedings of the First Workshop on Data Acquisition To Analysis*.
- [8] Muhammad Azam, Marion Blayo, Jean-Simon Venne, and Michel Allegue-Martinez. 2019. Occupancy Estimation Using Wifi Motion Detection via Supervised Machine Learning Algorithms. In *2019 GlobalSIP*. IEEE.
- [9] Omar Aziz, Colin M Russell, Edward J Park, and Stephen N Robinovitch. 2014. The effect of window size and lead time on pre-impact fall detection accuracy using support vector machine analysis of waist mounted inertial sensor data. In *2014 36th Annual International Conference of the IEEE Engineering in Medicine and Biology Society*. IEEE.
- [10] Bharathan Balaji, Jian Xu, Anthony Nwokafor, Rajesh Gupta, and Yuvraj Agarwal. 2013. Sentinel: occupancy based HVAC actuation using existing WiFi infrastructure within commercial buildings. In *Proceedings of the 11th ACM Conference on Embedded Networked Sensor Systems*.
- [11] Abdelkareem Bedri, Apoorva Verlekar, Edison Thomaz, Valerie Avva, and Thad Starner. 2015. A wearable system for detecting eating activities with proximity sensors in the outer ear. In *Proceedings of the 2015 ACM International Symposium on Wearable Computers*.

- [12] Sayantani Bhattacharya, S Sridevi, and R Pitchiah. 2012. Indoor air quality monitoring using wireless sensor network. In *2012 Sixth International Conference on Sensing Technology (ICST)*. IEEE.
- [13] Shengjie Bi, Tao Wang, Ellen Davenport, Ronald Peterson, Ryan Halter, Jacob Sorber, and David Kotz. 2017. Toward a wearable sensor for eating detection. In *Proceedings of the 2017 Workshop on Wearable Systems and Applications*.
- [14] Oscar Blanco-Novoa, Tiago M Fernández-Caramés, Paula Fraga-Lamas, and Luis Castedo. 2018. A cost-effective IoT system for monitoring indoor radon gas concentration. *Sensors* (2018).
- [15] Ben Buurman, Joarder Kamruzzaman, Gour Karmakar, and Syed Islam. 2020. Low-power wide-area networks: Design goals, architecture, suitability to use cases and research challenges. *IEEE Access* (2020).
- [16] Fabian Caba Heilbron, Victor Escorcia, Bernard Ghanem, and Juan Carlos Nibbles. 2015. ActivityNet: A Large-Scale Video Benchmark for Human Activity Understanding. In *Proceedings of the IEEE Conference (CVPR)*.
- [17] Luis M Candanedo, Véronique Feldheim, and Dominique Deramaix. 2017. Data driven prediction models of energy use of appliances in a low-energy house. *Energy and buildings* (2017).
- [18] Elif Cay, Yeliz Mert, Ali Bahcetepe, Bugra Kagan Akyazi, and Arif Selcuk Ogrenci. 2017. Beacons for indoor positioning. In *2017 International Conference on Engineering and Technology (ICET)*. IEEE.
- [19] Cody Chand, Angelo Villanueva, Matt Marty, and Michal Aibin. 2021. Privacy Preserving Occupancy Detection Using NB IoT Sensors. In *2021 IEEE Canadian Conference on Electrical and Computer Engineering (CCECE)*. IEEE.
- [20] Fathia Chekired, Laurent Canale, Sidahmed Tadjer, Amira Louni, Constantinos A Bouroussis, and Amar Tilmatine. 2021. Low Cost House Automation System based on Arduino Microcontroller. In *2021 IEEE (IAS)*. IEEE.
- [21] Chih-Yen Chen, Chi-Wen Hsieh, Yi-Hsiang Liao, and Tai-Jei Yin. 2018. Implementation of wearable devices and indoor positioning system for a smart hospital environment. In *2018 International (ISSI)*. IEEE.
- [22] Hao Chen, Seung Hyun Cha, and Tae Wan Kim. 2019. A framework for group activity detection and recognition using smartphone sensors and beacons. *Building and Environment* (2019).
- [23] Joy Iong Zong Chen. 2020. Smart security system for suspicious activity detection in volatile areas. *Journal of Information Technology* (2020).
- [24] Liming Chen, Jesse Hoey, Chris D Nugent, Diane J Cook, and Zhiwen Yu. 2012. Sensor-based activity recognition. *IEEE Transactions on Systems, Man, and Cybernetics, Part C (Applications and Reviews)* (2012).
- [25] Xuxu Chen, Yu Zheng, Yubiao Chen, Qiwei Jin, Weiwei Sun, Eric Chang, and Wei-Ying Ma. 2014. Indoor air quality monitoring system for smart buildings. In *Proceedings of the ACM conference on pervasive and ubiquitous computing*.
- [26] Zhenghua Chen, Rui Zhao, Qingchang Zhu, Mustafa K Masood, Yeng Chai Soh, and Kezhi Mao. 2017. Building occupancy estimation with environmental sensors via CDBLSTM. *IEEE Transactions on Industrial Electronics* (2017).
- [27] Seyed Ali Cheraghi, Vinod Nambodiri, and Laura Walker. 2017. GuideBeacon: Beacon-based indoor wayfinding for the blind, visually impaired, and disoriented. In *2017 IEEE (PerCom)*. IEEE.
- [28] Claudia Chițu, Grigore Stamatescu, and Alberto Cerpa. 2019. Building occupancy estimation using supervised learning techniques. In *2019 23rd International Conference on System Theory, Control and Computing (ICSTCC)*. IEEE.
- [29] Keum San Chun, Sarnab Bhattacharya, and Edison Thomaz. 2018. Detecting eating episodes by tracking jawbone movements with a non-contact wearable sensor. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies* (2018).
- [30] Wei Cui, Bing Li, Le Zhang, and Zhenghua Chen. 2021. Device-free single-user activity recognition using diversified deep ensemble learning. *Applied Soft Computing* (2021).
- [31] Anooshmita Das, Krister Jens, and Mikkel Baun Kjærgaard. 2020. Space utilization and activity recognition using 3D stereo vision camera inside an educational building. In *Adjunct Proceedings of the 2020 ACM International Joint Conference on Pervasive and Ubiquitous Computing and Proceedings*.
- [32] Alessandra De Paola, Marco Ortolani, Giuseppe Lo Re, Giuseppe Anastasi, and Sajal K Das. 2014. Intelligent management systems for energy efficiency in buildings: A survey. *ACM Computing Surveys (CSUR)* 47, 1 (2014), 1–38.
- [33] Djamel Djenouri, Roufaida Laidi, Youcef Djenouri, and Ilanko Balasingham. 2019. Machine learning for smart building applications: Review and taxonomy. *ACM Computing Surveys (CSUR)* 52, 2 (2019), 1–36.
- [34] Bing Dong, Vishnu Prakash, Fan Feng, and Zheng O'Neill. 2019. A review of smart building sensing system for better indoor environment control. *Energy and Buildings* 199 (2019).
- [35] Tobore Ekwevugbe, Neil Brown, and Denis Fan. 2012. A design model for building occupancy detection using sensor fusion. In *2012 6th IEEE International Conference on Digital Ecosystems and Technologies (DEST)*. IEEE.
- [36] Tobore Ekwevugbe, Neil Brown, Vijay Pakka, and Denis Fan. 2013. Real-time building occupancy sensing using neural-network based sensor network. In *2013 7th IEEE (DEST)*. IEEE.
- [37] Mostafa Elhoushi, Jacques Georgy, Aboelmagd Noureldin, and Michael J Korenberg. 2016. A survey on approaches of motion mode recognition using sensors. *IEEE Transactions on intelligent transportation systems* (2016).
- [38] Seham Abd Elkader, Michael Barlow, and Erandi Lakshika. 2018. Wearable sensors for recognizing individuals undertaking daily activities. In *Proceedings of the 2018 ACM International Symposium on Wearable Computers*.

- [39] Maria Fazio, Alina Buzachis, Antonino Galletta, Antonio Celesti, and Massimo Villari. 2020. A proximity-based indoor navigation system tackling the COVID-19 social distancing measures. In *2020 IEEE (ISCC)*. IEEE.
- [40] Faeghe Fereidoonian, Farshad Firouzi, and Bahar Farahani. 2020. Human activity recognition: From sensors to applications. In *2020 International Conference on Omni-layer Intelligent Systems (COINS)*. IEEE.
- [41] Florian Fiebig, Sebastian Kochanneck, Ingo Mauser, and Hartmut Schneck. 2017. Detecting occupancy in smart buildings by data fusion from low-cost sensors: poster description. In *Proceedings of the Eighth International Conference on Future Energy Systems*.
- [42] S Mitchell Finnigan, Adrian K Clear, Jeremy Farr-Wharton, Karim Ladha, and Rob Comber. 2017. Augmenting audits: Exploring the role of sensor toolkits in sustainable buildings management. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies* (2017).
- [43] Patricia Franco, Jose Manuel Martinez, Young-Chon Kim, and Mohamed A Ahmed. 2021. IoT based approach for load monitoring and activity recognition in smart homes. *IEEE Access* (2021).
- [44] Pradnya Gaonkar, Jyotsna Bapat, Debabrata Das, and Subrahmanya VRK Rao. 2019. Occupancy estimation in semi-public spaces using sensor fusion and context awareness. In *2019 IEEE Region 10 Symposium (TENSYP)*. IEEE.
- [45] Rayan Gargees, James M Keller, Mihail Popescu, and Marjorie Skubic. 2019. Non-invasive Classification of Sleep Stages with a Hydraulic Bed Sensor Using Deep Learning. In *International Conference on Smart Homes and Health*.
- [46] Hangli Ge, Zhe Sun, Yasuhira Chiba, and Noboru Koshizuka. 2022. Accurate indoor location awareness based on machine learning of environmental sensing data. *Computers & Electrical Engineering* (2022).
- [47] Sunil Kumar Ghai, Lakshmi V Thanayankizil, Deva P Seetharam, and Dipanjan Chakraborty. 2012. Occupancy detection in commercial buildings using opportunistic context sources. In *2012 IEEE international conference on pervasive computing and communications workshops*. IEEE.
- [48] Luis Gonzalez, Reimar Stier, and Oliver Amft. 2016. Data mining-based localisation of spatial low-resolution sensors in commercial buildings. In *Proceedings of the 3rd ACM Conference on Systems for Energy-Efficient Built Environments*.
- [49] Tianbo Gu, Zheng Fang, Zhicheng Yang, Pengfei Hu, and Prasant Mohapatra. 2019. MmSense: Multi-person detection and identification via mmWave sensing. In *Proceedings of the 3rd ACM Workshop on Millimeter-wave Networks and Sensing Systems*. 45–50.
- [50] Jun Han, Shijia Pan, Manal Kumar Sinha, Hae Young Noh, Pei Zhang, and Patrick Tague. 2018. Smart home occupant identification via sensor fusion across on-object devices. *ACM Transactions on Sensor Networks (TOSN)* (2018).
- [51] Mohammed Mehedi Hassan, Md Zia Uddin, Amr Mohamed, and Ahmad Almogren. 2018. A robust human activity recognition system using smartphone sensors and deep learning. *Future Generation Computer Systems* (2018).
- [52] Brodie W Hobson, Daniel Lowcay, H Burak Gunay, Araz Ashouri, and Guy R Newsham. 2019. Opportunistic occupancy-count estimation using sensor fusion: A case study. *Building and environment* (2019).
- [53] Zawar Hussain, Michael Sheng, and Wei Emma Zhang. 2019. Different approaches for human activity recognition: A survey. *arXiv preprint arXiv:1906.05074* (2019).
- [54] Mostafa Ibrahim, Srikanth Muralidharan, Zhiwei Deng, Arash Vahdat, and Greg Mori. 2016. A hierarchical deep temporal model for group activity recognition. In *IEEE Conference on Computer Vision and Pattern Recognition*.
- [55] Mohamed Ibrahim, Viet Nguyen, Siddharth Rupavatharam, Minitha Jawahar, Marco Gruteser, and Richard Howard. 2016. Visible light based activity sensing using ceiling photosensors. In *Proceedings of the 3rd Workshop on Visible Light Communication Systems*.
- [56] Haruyuki Ichino, Katsuhiko Kaji, Ken Sakurada, Kei Hiroi, and Nobuo Kawaguchi. 2016. HASC-PAC2016: Large scale human pedestrian activity corpus and its baseline recognition. In *Proceedings of the 2016 ACM International Joint Conference on Pervasive and Ubiquitous Computing: Adjunct*.
- [57] Iea. 2021. Buildings – topics. <https://www.iea.org/topics/buildings>
- [58] Ahmad Jalal, Mouazma Batool, and Kibum Kim. 2020. Stochastic recognition of physical activity and healthcare using tri-axial inertial wearable sensors. *Applied Sciences* (2020).
- [59] Aftab Jalia and Michael Ramage. [n.d.]. The Edge, Amsterdam. ([n. d.]).
- [60] Kasthuri Jayarajah, Zaman Lantra, and Archan Misra. 2016. Fusing wifi and video sensing for accurate group detection in indoor spaces. In *Proceedings of the 3rd International on Workshop on Physical Analytics*.
- [61] Youngmin Ji, Kisu Ok, and Woo Suk Choi. 2018. Occupancy detection technology in the building based on IoT environment sensors. In *Proceedings of the 8th International Conference on the Internet of Things*.
- [62] Mengda Jia, Ali Komeily, Yueren Wang, and Ravi S Srinivasan. 2019. Adopting Internet of Things for the development of smart buildings: A review of enabling technologies and applications. *Automation in Construction* (2019).
- [63] Mengda Jia, Ravi S Srinivasan, Robert Ries, and Gnana Bharathy. 2018. Exploring the validity of occupant behavior model for improving office building energy simulation. In *2018 Winter Simulation Conference (WSC)*. IEEE.
- [64] Chaoyang Jiang, Zhenghua Chen, Lih Chieh Png, Korkut Bekiroglu, Seshadri Srinivasan, and Rong Su. 2018. Building occupancy detection from carbon-dioxide and motion sensors. In *15th international conference on (ICARCV)*. IEEE.

- [65] Aqeel Kazmi, Michael O'grady, Declan Delaney, Antonio G Ruzzelli, and Gregory MP O'hare. 2014. A review of wireless-sensor-network-enabled building energy management systems. *ACM Transactions on Sensor Networks* (2014).
- [66] Oussama Kerdjidi, Naeem Ramzan, Khalida Ghanem, Abbes Amira, and Fatima Chouireb. 2020. Fall detection and human activity classification using wearable sensors and compressed sensing. *Journal of Ambient Intelligence and Humanized Computing* (2020).
- [67] Aftab Khan, James Nicholson, Sebastian Mellor, Daniel Jackson, Karim Ladha, Cassim Ladha, Jon Hand, Joseph Clarke, Patrick Olivier, and Thomas Plötz. 2014. Occupancy monitoring using environmental & context sensors and a hierarchical analysis framework. (2014).
- [68] Donya Sheikh Khan, Jakub Kolarik, Christian Anker Hviid, and Peter Weitzmann. 2021. Method for long-term mapping of occupancy patterns in open-plan and single office spaces by using passive-infrared (PIR) sensors mounted below desks. *Energy and Buildings* (2021).
- [69] Abdelhak Kharbouch, Anass Berouine, Hamza Elkhouchi, Soukayna Berrabah, Mohamed Bakhouya, Driss El Ouadghiri, and Jaafar Gaber. 2022. Internet-of-Things Based Hardware-in-the-Loop Framework for Model-Predictive-Control of Smart Building Ventilation. *Sensors* (2022).
- [70] Mone Kijima, Norihisa Segawa, Masato Yazawa, and Masa-yuki Yamamoto. 2018. Multiple door opening/closing detection and identification system using infrasound sensors. In *Proceedings of the 5th Conference on Systems for Built Environments*.
- [71] Minseok Kim, Takeshi Tasaki, and Satoshi Yamakawa. 2019. Millimeter-wave radio tomographic imaging technique using multipath components for indoor localization. In *2019 International Symposium on Antennas and Propagation (ISAP)*. IEEE, 1–3.
- [72] Tae Wan Kim, Seunghyun Cha, and Youngchul Kim. 2018. Space choice, rejection and satisfaction in university campus. *Indoor and Built Environment* (2018).
- [73] Joseph Korpela, Kazuyuki Takase, Takahiro Hirashima, Takuya Maekawa, Julien Eberle, Dipanjan Chakraborty, and Karl Aberer. 2015. An energy-aware method for the joint recognition of activities and gestures using wearable sensors. In *Proceedings of the 2015 ACM International Symposium on Wearable Computers*.
- [74] Heli Koskimäki, Henna Mönttinen, Pekka Siirtola, Hanna-Leena Huttunen, Raija Halonen, and Juha Röning. 2017. Early detection of migraine attacks based on wearable sensors: experiences of data collection using Empatica E4. In *Proceedings of the 2017 ACM International Joint Conference on Pervasive and Ubiquitous Computing and Proceedings of the 2017 ACM International Symposium on Wearable Computers*.
- [75] Anuj Kumar, Abhishek Singh, Ashok Kumar, Manoj Kumar Singh, Pinakeswar Mahanta, and Subhas Mukhopadhyay. 2018. Sensing technologies for monitoring intelligent buildings: A review. *IEEE Sensors Journal* (2018).
- [76] Roufaida Laidi and Djamel Djenouri. 2018. UDEPLOY: User-driven learning for occupancy sensors DEPLOYment in smart buildings. In *IEEE International Conference on (PerCom Workshops)*. IEEE.
- [77] Jared Langevin. 2019. Longitudinal dataset of human-building interactions in US offices. *Scientific data* (2019).
- [78] Gierad Laput and Chris Harrison. 2019. Sensing fine-grained hand activity with smartwatches. In *Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems*.
- [79] Billy Pik Lik Lau, Tanmay Chaturvedi, Benny Kai Kiat Ng, Kai Li, Marakkalage Sumudu Hasala, and Chau Yuen. 2016. Spatial and temporal analysis of urban space utilization with renewable wireless sensor network. In *2016 IEEE/ACM 3rd International Conference on Big Data Computing Applications and Technologies (BDCAT)*. IEEE.
- [80] Haobo Li, Aman Shrestha, Francesco Fioranelli, Julien Le Kernec, and Hadi Heidari. 2018. Hierarchical classification on multimodal sensing for human activity recognition and fall detection. In *2018 IEEE SENSORS*. IEEE.
- [81] Haobo Li, Aman Shrestha, Francesco Fioranelli, Julien Le Kernec, Hadi Heidari, Matteo Pepa, Enea Cippitelli, Ennio Gambi, and Susanna Spinsante. 2017. Multisensor data fusion for human activities classification and fall detection. In *2017 IEEE SENSORS*. IEEE.
- [82] Haobo Li, Aman Shrestha, Hadi Heidari, Julien Le Kernec, and Francesco Fioranelli. 2019. Activities recognition and fall detection in continuous data streams using radar sensor. In *2019 IEEE MTT-S (IMBioC)*. IEEE.
- [83] Qimeng Li, Raffaele Gravina, Ye Li, Saeed H Alsamhi, Fangmin Sun, and Giancarlo Fortino. 2020. Multi-user activity recognition: Challenges and opportunities. *Information Fusion* (2020).
- [84] Xinyu Li, Yanyi Zhang, Ivan Marsic, Aleksandra Sarcevic, and Randall S Burd. 2016. Deep learning for rfid-based activity recognition. In *Proceedings of the 14th ACM Conference on Embedded Network Sensor Systems CD-ROM*.
- [85] Zhaoxuan Li and Bing Dong. 2017. A new modeling approach for short-term prediction of occupancy in residential buildings. *Building and Environment* (2017).
- [86] Ming Liang, Bin Yang, Yun Chen, Rui Hu, and Raquel Urtasun. 2019. Multi-task multi-sensor fusion for 3d object detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*.
- [87] Qingshan Liang, Lei Yu, Xuping Zhai, Zaihong Wan, and Hong Nie. 2018. Activity Recognition Based on Thermopile Imaging Array Sensor. In *2018 IEEE International Conference on Electro/Information Technology (EIT)*. IEEE.

- [88] Yunji Liang, Xin Wang, Zhiwen Yu, Bin Guo, Xiaolong Zheng, and Sagar Samtani. 2021. Energy-efficient collaborative sensing: Learning the latent correlations of heterogeneous sensors. *ACM (TOSN)* (2021).
- [89] Wen-Hau Liao, Chao-Lin Wu, and Li-Chen Fu. 2008. Inhabitants tracking system in a cluttered home environment via floor load sensors. *IEEE Transactions on Automation Science and Engineering* (2008).
- [90] Guanxiong Liu, Yishuang Geng, and Kaveh Pahlavan. 2015. Effects of calibration RFID tags on performance of inertial navigation in indoor environment. In *International Conference on Computing, Networking and Communications*. IEEE.
- [91] Ye Liu, Liqiang Nie, Li Liu, and David S Rosenblum. 2016. From action to activity: sensor-based activity recognition. *Neurocomputing* (2016).
- [92] Zhen Liu, Zhiyu Deng, and Peter Demian. 2018. Integration of Building Information Modelling (BIM) and sensor technology: a review of current developments and future outlooks. In *Proceedings of the 2nd International Conference on Computer Science and Application Engineering*.
- [93] Zhenguang Liu, Luming Zhang, Qi Liu, Yifang Yin, Li Cheng, and Roger Zimmermann. 2016. Fusion of magnetic and visual sensors for indoor localization: Infrastructure-free and more effective. *IEEE Transactions on Multimedia* (2016).
- [94] Edoardo Longo, Alessandro EC Redondi, Massimo Bianchini, Patrizia Bolzan, and Stefano Maffei. 2020. Smart gate: A modular system for occupancy and environmental monitoring of spaces. In *5th Conference on (SpliTech)*. IEEE.
- [95] Fei Luo, Stefan Poslad, and Eliane Bodanese. 2019. Kitchen activity detection for healthcare using a low-power radar-enabled sensor network. In *ICC 2019-2019 IEEE International Conference on Communications (ICC)*. IEEE.
- [96] Na Luo, Zhe Wang, David Blum, Christopher Weyandt, Norman Bourassa, Mary Piette, and Tianzhen Hong. 2022. A three-year dataset supporting research on building energy management and occupancy analytics. *Scientific Data* (2022).
- [97] Xiaomu Luo, Huoyuan Tan, Qiuju Guan, Tong Liu, Hankz Hankui Zhuo, and Baihua Shen. 2016. Abnormal activity detection using pyroelectric infrared sensors. *Sensors* 16, 6 (2016).
- [98] Congcong Ma, Wenfeng Li, Raffaele Gravina, and Giancarlo Fortino. 2017. Posture detection based on smart cushion for wheelchair users. *Sensors* (2017).
- [99] Claudio Martani, David Lee, Prudence Robinson, Rex Britter, and Carlo Ratti. 2012. ENERNET: Studying the dynamic relationship between building occupancy and energy consumption. *Energy and Buildings* (2012).
- [100] Sakorn Mekruksavanich, Narit Hnoohom, and Anuchit Jitpattanakul. 2018. Smartwatch-based sitting detection with human activity recognition for office workers syndrome. In *International (ECTI-NCON)*. IEEE.
- [101] Ryan Melfi, Ben Rosenblum, Bruce Nordman, and Ken Christensen. 2011. Measuring building occupancy using existing network infrastructure. In *2011 International Green Computing Conference and Workshops*. IEEE.
- [102] Aravind K Mikkilineni, Jin Dong, Teja Kuruganti, and David Fugate. 2019. A novel occupancy detection solution using low-power IR-FPA based wireless occupancy sensor. *Energy and Buildings* (2019).
- [103] Shinya Misaki, Sopicha Stirapongsasuti, Tomokazu Matsui, Hirohiko Suwa, and Keiichi Yasumoto. 2020. Activity recognition through intermittent distributed processing by energy harvesting PIR sensors: demo abstract. In *Proceedings of the 18th Conference on Embedded Networked Sensor Systems*.
- [104] Nicola Moretti, JD Blanco Cadena, A Mannino, T Poli, and F Re Cecconi. 2021. Maintenance service optimization in smart buildings through ultrasonic sensors network. *Intelligent Buildings International* (2021).
- [105] KA Muthukumar, Mondher BOUAZIZI, and Tomoaki OHTSUKI. [n.d.]. Detection of Human Activity Based on Hybrid Deep Learning Model Using a Low-Resolution Infrared Array Sensor. ([n. d.]).
- [106] KA Muthukumar, Mohdher Bouazizi, and Tomaki Ohtsuki. 2021. A Novel Hybrid Deep Learning Model for Activity Detection Using Wide-Angle Low-Resolution Infrared Array Sensor. *IEEE Access* (2021).
- [107] Chihiro Nakatani, Kohei Sendo, and Norimichi Ukita. 2021. Group Activity Recognition Using Joint Learning of Individual Action Recognition and People Grouping. In *17th Conference (MVA)*. IEEE.
- [108] Nashreen Nesa and Indrajit Banerjee. 2017. IoT-based sensor data fusion for occupancy sensing using Dempster-Shafer evidence theory for smart buildings. *IEEE Internet of Things Journal* (2017).
- [109] Tuan Anh Nguyen and Marco Aiello. 2013. Energy intelligent buildings based on user activity: A survey. *Energy and buildings* (2013).
- [110] Maciej A Noras. 2020. Activity Detection and Recognition With Passive Electric Field Sensors. In *2020 IEEE Industry Applications Society Annual Meeting*. IEEE.
- [111] Mark Mbock Ogonji, George Okeyo, and Joseph Muliario Wafula. 2020. A survey on privacy and security of Internet of Things. *Computer Science Review* (2020).
- [112] Babatunji Omoniwa, Riaz Hussain, Muhammad Javed, Safdar Bouk, and Shahzad A Malik. 2018. Fog/edge computing-based IoT (FECIoT): Architecture, applications, and research issues. *IEEE Internet of Things Journal* (2018).
- [113] Mohammad Ostadijafari, Anamika Dubey, and Nanpeng Yu. 2020. Linearized price-responsive HVAC controller for optimal scheduling of smart building loads. *IEEE Transactions on Smart Grid* (2020).
- [114] Jianli Pan, Raj Jain, and Subharthi Paul. 2014. A survey of energy efficiency in buildings and microgrids using networking technologies. *IEEE Communications Surveys & Tutorials* 16, 3 (2014).

- [115] C Papatsimpa and JPMG Linnartz. 2018. Propagating sensor uncertainty to better infer office occupancy in smart building control. *Energy and Buildings* (2018).
- [116] Alec Parise, Miguel A Manso-Callejo, Hung Cao, Marco Mendonca, Harpreet Kohli, and Monica Wachowicz. 2019. Indoor occupancy prediction using an IoT platform. In *6th International Conference (IOTSMS)*. IEEE.
- [117] Charith Perera, Arkady Zaslavsky, Peter Christen, and Dimitrios Georgakopoulos. 2013. Context aware computing for the internet of things: A survey. *IEEE communications surveys & tutorials* (2013).
- [118] Manisa Pipattanasomporn, Gopal Chitalia, Jitkomut Songsiri, Chaodit Aswakul, Wanchalerm Pora, Surapong Suwankawin, Kulyos Audomvongseree, and Naebboon Hoonchareon. 2020. CU-BEMS, smart building electricity consumption and indoor environmental sensor datasets. *Scientific Data* (2020).
- [119] Kerly Prastika et al. 2020. Application of individual activity recognition in the room using CNN Alexnet method. In *IOP Conference Series: Materials Science and Engineering*. IOP Publishing.
- [120] Azkario Rizky Pratama, Alexander Lazovik, and Marco Aiello. 2019. Office multi-occupancy detection using BLE beacons and power meters. In *10th Annual (UEMCON)*. IEEE.
- [121] Loubna Qabbal, Zohir Younsi, and Hassane Naji. 2021. An indoor air quality and thermal comfort appraisal in a retrofitted university building via low-cost smart sensor. *Indoor and Built Environment* (2021).
- [122] Loubna Qabbal, Zohir Younsi, and Hassane Naji. 2022. An indoor air quality and thermal comfort appraisal in a retrofitted university building via low-cost smart sensor. *Indoor and Built Environment* (2022).
- [123] Basheer Qolomany, Ala Al-Fuqaha, Ajay Gupta, Driss Benhaddou, Safaa Alwajidi, Junaid Qadir, and Alvis C Fong. 2019. Leveraging machine learning and big data for smart buildings: A comprehensive survey. *IEEE Access* 7 (2019).
- [124] Ioana Radoi, Gabriel Gutu, Traian Rebedea, Cristian Neagu, and Marius Popa. 2017. Indoor positioning inside an office building using BLE. In *2017 21st International Conference on Control Systems and Computer Science (CSCS)*. IEEE.
- [125] Haolia Rahman, Abdul Azis Abdillah, Asep Apriana, Devi Handaya, and Idrus Assagaf. 2021. Indoor CO2 Level-Based Occupancy Estimation at Low-Scale Occupant using Statistical Learning Method. In *4th Conference (IC2IE)*. IEEE.
- [126] Princy Randhawa, Vijay Shanthagiri, Ajay Kumar, and Vinod Yadav. 2020. Human activity detection using machine learning methods from wearable sensors. *Sensor Review* (2020).
- [127] Krati Rastogi and Divya Lohani. 2019. IoT-based Occupancy Estimation Models for Indoor Non-Residential Environments. In *2019 IEEE 16th India Council International Conference (INDICON)*. IEEE.
- [128] Attila Reiss and Didier Stricker. 2012. Introducing a new benchmarked dataset for activity monitoring. In *2012 16th international symposium on wearable computers*. IEEE.
- [129] Ricardo Ribani and Mauricio Marengoni. 2019. A survey of transfer learning for convolutional neural networks. In *2019 32nd SIBGRAPI conference on graphics, patterns and images tutorials (SIBGRAPI-T)*. IEEE.
- [130] Daniel Roggen, Alberto Calatroni, Mirco Rossi, Thomas Holleczeck, Kilian Förster, Gerhard Tröster, Paul Lukowicz, David Bannach, Gerald Pirk, Alois Ferscha, et al. 2010. Collecting complex activity datasets in highly rich networked sensor environments. In *7th conference (INSS)*. IEEE.
- [131] Homagni Saha, Anthony R Florita, Gregor P Henze, and Soumik Sarkar. 2019. Occupancy sensing in buildings: A review of data analytics approaches. *Energy and Buildings* 188 (2019).
- [132] Ehsan Samani, Parviz Khaledian, Armin Aligholian, Evangelos Papalexakis, Shawn Cun, Masoud H Nazari, and Hamed Mohsenian-Rad. 2020. Anomaly detection in iot-based pir occupancy sensors to improve building energy efficiency. In *2020 IEEE Power & Energy Society Innovative Smart Grid Technologies Conference (ISGT)*. IEEE.
- [133] Gheorghe Sebestyen, Ionut Stoica, and Anca Hangan. 2016. Human activity recognition and monitoring for elderly people. In *2016 IEEE 12th international conference on intelligent computer communication and processing (ICCP)*. IEEE.
- [134] David Sembroiz, Davide Careglio, Sergio Ricciardi, and Ugo Fiore. 2019. Planning and operational energy optimization solutions for smart buildings. *Information Sciences* (2019).
- [135] Sindhu S Shetty, Hoang Duc Chinh, Manish Gupta, and Sanjeev Kumar Panda. 2017. User presence estimation in multi-occupancy rooms using plug-load meters and PIR sensors. In *Global Communications Conference*. IEEE.
- [136] Qiongfang Shi, Zixuan Zhang, Tianyi He, Zhongda Sun, Bingjie Wang, Yuqin Feng, Xuechuan Shan, Budiman Salam, and Chengkuo Lee. 2020. Deep learning enabled smart mats as a scalable floor monitoring system. *Nature communications* (2020).
- [137] Huang-Chia Shih. 2014. A robust occupancy detection and tracking algorithm for the automatic monitoring and commissioning of a building. *Energy and Buildings* (2014).
- [138] Muhammad Shoaib, Hans Scholten, Paul JM Havinga, and Ozlem Durmaz Incel. 2016. A hierarchical lazy smoking detection algorithm using smartwatch sensors. In *18th Conference on (Healthcom)*. IEEE.
- [139] Pekka Siirtola. 2019. Continuous stress detection using the sensors of commercial smartwatch. In *Adjunct Proceedings of the 2019 ACM International Joint Conference on Pervasive and Ubiquitous Computing and Proceedings of the 2019 ACM International Symposium on Wearable Computers*.

- [140] Akash Deep Singh, Sandeep Singh Sandha, Luis Garcia, and Mani Srivastava. 2019. Radhar: Human activity recognition from point clouds generated through a millimeter-wave radar. In *Proceedings of the 3rd ACM Workshop on Millimeter-wave Networks and Sensing Systems*.
- [141] Beril Sirmacek and Maria Riveiro. 2020. Occupancy prediction using low-cost and low-resolution heat sensors for smart offices. *Sensors* (2020).
- [142] Abdul Syafiq Abdull Sukor, Ammar Zakaria, Norasmadi Abdul Rahim, Latifah Munirah Kamarudin, Rossi Setchi, and Hiromitsu Nishizaki. 2019. A hybrid approach of knowledge-driven and data-driven reasoning for activity recognition in smart homes. *Journal of Intelligent & Fuzzy Systems* (2019).
- [143] Shengjing Sun, Xiaochen Zheng, Javier Villalba-Diez, and Joaquín Ordieres-Meré. 2019. Indoor air-quality data-monitoring system: Long-term monitoring benefits. *Sensors* (2019).
- [144] Chiara Tagliaro, Yaoyi Zhou, and Ying Hua. 2020. A change in granularity: measure space utilization through smart technologies. *Facilities* (2020).
- [145] Sheng Tan, Linghan Zhang, Zi Wang, and Jie Yang. 2019. MultiTrack: Multi-user tracking and activity recognition using commodity WiFi. In *Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems*.
- [146] Jinhui Tang, Xiangbo Shu, Rui Yan, and Liyan Zhang. 2019. Coherence constrained graph LSTM for group activity recognition. *IEEE transactions on pattern analysis and machine intelligence* (2019).
- [147] Yansong Tang, Jiwen Lu, Zian Wang, Ming Yang, and Jie Zhou. 2019. Learning semantics-preserving attention and contextual interaction for group activity recognition. *IEEE Transactions on Image Processing* (2019).
- [148] Thiago Teixeira, Gershon Dublon, and Andreas Savvides. 2010. A survey of human-sensing: Methods for detecting presence, count, location, track, and identity. *Comput. Surveys* (2010).
- [149] Zeynep Duygu Tekler, Eikichi Ono, Yuzhen Peng, Sicheng Zhan, Bertrand Lasternas, and Adrian Chong. 2022. ROBOD, room-level occupancy and building operation dataset. In *Building Simulation*. Springer.
- [150] Lakshmi V Thanayankizil, Sunil Kumar Ghai, Dipanjan Chakraborty, and Deva P Seetharam. 2012. Softgreen: Towards energy management of green office buildings with soft sensors. In *4th Conference on (COMSNETS)*. IEEE.
- [151] Edison Thomaz, Abdelkareem Bedri, Temiloluwa Prioleau, Irfan Essa, and Gregory D Abowd. 2017. Exploring symmetric and asymmetric bimanual eating detection with inertial sensors on the wrist. In *Proceedings of the 1st Workshop on Digital Biomarkers*.
- [152] Jorge Tuesta, Demetrio Albornoz, Guillermo Kemper, and Carlos A Almenara. 2019. A Sociometric Sensor Based on Proximity, Movement and Verbal Interaction Detection. In *Conference on (INCISCOS)*. IEEE.
- [153] Ash Tyndall, Rachel Cardell-Oliver, and Adrian Keating. 2016. Occupancy estimation using a low-pixel count thermal imager. *IEEE Sensors Journal* (2016).
- [154] Md Zia Uddin and Mohammad Mehedi Hassan. 2018. Activity recognition for cognitive assistance using body sensors data and deep convolutional neural network. *IEEE Sensors Journal* (2018).
- [155] Amari Vaughn, Paul Biocco, Yang Liu, and Mohd Anwar. 2018. Activity detection and analysis using smartphone sensors. In *2018 IEEE International Conference on Information Reuse and Integration (IRI)*. IEEE.
- [156] Anurag Verma, Surya Prakash, Vishal Srivastava, Anuj Kumar, and Subhas Chandra Mukhopadhyay. 2019. Sensing, controlling, and IoT infrastructure in smart building: a review. *IEEE Sensors Journal* (2019).
- [157] Federico Viani, Alessandro Polo, Fabrizio Robol, Giacomo Oliveri, Paolo Rocca, and Andrea Massa. 2014. Crowd detection and occupancy estimation through indirect environmental measurements. In *8th conference on (EuCAP)*.
- [158] Giulia Violatto, Ashish Pandharipande, Shuai Li, and Luca Schenato. 2019. Anomalous occupancy sensor behavior detection in connected indoor lighting systems. In *2019 IEEE 5th World Forum on Internet of Things (WF-IoT)*. IEEE.
- [159] Stefan Wagner, Esben Hunnerup, and Jorge Miranda. 2019. Demonstration of a Micro-Services Based Multi-Purpose Sensor Platform for Supporting Ambient Assisted Living Systems. *Sensing Technologies in Pervasive Healthcare: Evaluation and Design for Senior Citizens and Continuous Care* (2019).
- [160] Jindong Wang, Yiqiang Chen, Shuji Hao, Xiaohui Peng, and Lisha Hu. 2019. Deep learning for sensor-based activity recognition: A survey. *Pattern Recognition Letters* 119 (2019), 3–11.
- [161] Wei Wang, Jiayu Chen, and Tianzhen Hong. 2018. Occupancy prediction through machine learning and data fusion of environmental sensing and Wi-Fi sensing in buildings. *Automation in Construction* (2018).
- [162] Yaqing Wang, Quanming Yao, James T Kwok, and Lionel M Ni. 2020. Generalizing from a few examples: A survey on few-shot learning. *ACM computing surveys (csur)* (2020).
- [163] Zhe Wang, Tianzhen Hong, Mary Ann Piette, and Marco Prtoni. 2019. Inferring occupant counts from Wi-Fi data in buildings through machine learning. *Building and Environment* (2019).
- [164] Jamie A Ward, Gerald Pirkel, Peter Hevesi, and Paul Lukowicz. 2016. Towards recognising collaborative activities using multiple on-body sensors. In *Proceedings of ACM Joint Conference on Pervasive and Ubiquitous Computing*.
- [165] Martin Wirz, Daniel Roggen, and Gerhard Troster. 2009. Decentralized detection of group formations from wearable acceleration sensors. In *2009 International Conference on Computational Science and Engineering*. IEEE.

- [166] Fang-Jing Wu, Yu-Chee Tseng, and Wen-Chih Peng. 2016. Activity sense organs: Energy-efficient activity sensing with adaptive duty cycle control. In *Proceedings of ACM Joint Conference on Pervasive and Ubiquitous Computing*.
- [167] Xugang Xi, Minyan Tang, Seyed M Miran, and Zhizeng Luo. 2017. Evaluation of feature extraction and recognition for activity monitoring and fall detection based on wearable sEMG sensors. *Sensors* (2017).
- [168] Ruchao Xiahou, Jianjun Yi, Liang He, Wang He, and Tianhua Huang. 2019. Indoor air monitoring system based on Internet of things and its prediction model. In *Proceedings of the International Conference on Industrial Control Network and System Engineering Research*.
- [169] Xiaoke Yang, Lingyu Yang, and Jing Zhang. 2017. A WiFi-enabled indoor air quality monitoring and control system: the design and control experiments. In *2017 13th IEEE International conference on control & automation (ICCA)*. IEEE.
- [170] Zheng Yang and Burcin Becerik-Gerber. 2015. Cross-space building occupancy modeling by contextual information based learning. In *Proceedings of the 2nd ACM Conference on Embedded Systems for Energy-Efficient Built Environments*.
- [171] Zheng Yang, Nan Li, Burcin Becerik-Gerber, and Michael Orosz. 2012. A multi-sensor based occupancy estimation model for supporting demand driven HVAC operations. In *Proceedings of the 2012 Symposium on Simulation for Architecture and Urban Design*. Citeseer.
- [172] Ehsan Yavari, Xiaomeng Gao, and Olga Boric-Lubecke. 2018. Subject count estimation by using Doppler radar occupancy sensor. In *40th Annual Conference of the IEEE Engineering in Medicine and Biology Society (EMBC)*. IEEE.
- [173] Cunyi Yin, Jing Chen, Xiren Miao, Hao Jiang, and Deying Chen. 2021. Device-Free Human Activity Recognition with Low-Resolution Infrared Array Sensor Using Long Short-Term Memory Neural Network. *Sensors* (2021).
- [174] Xizhe Yin, Weiming Shen, Jagath Samarabandu, and Xianbin Wang. 2015. Human activity detection based on multiple smart phone sensors and machine learning algorithms. In *19th conference on (CSCWD)*. IEEE.
- [175] Faheem Zafari, Athanasios Gkelias, and Kin K Leung. 2019. A survey of indoor localization systems and technologies. *IEEE Communications Surveys & Tutorials* (2019).
- [176] Wei Zhang, Weizheng Hu, and Yonggang Wen. 2018. Thermal comfort modeling for smart buildings: A fine-grained deep learning approach. *IEEE Internet of Things Journal* (2018).
- [177] Yang Zhao, Peter Tu, and Ming-Ching Chang. 2019. Occupancy Sensing and Activity Recognition with Cameras and Wireless Sensors. In *Proceedings of the 2nd Workshop on Data Acquisition To Analysis*.
- [178] Stylianos Zikos, Apostolos Tsolakis, Dimitrios Meskos, Athanasios Tryferidis, and Dimitrios Tzovaras. 2016. Conditional random fields-based approach for real-time building occupancy estimation with multi-sensory networks. *Automation in Construction* (2016).
- [179] Lars Zimmermann, Robert Weigel, and Georg Fischer. 2017. Fusion of nonintrusive environmental sensors for occupancy detection in smart homes. *IEEE Internet of Things Journal* (2017).