

ChemCatChem

The European Society Journal for Catalysis





Accepted Article

Title: The Simultaneous Total Oxidation of Toluene, Propene and CO Environmental Pollutants Using Bimetallic Au-Pt/ZrO2/UVM-7 Catalysts

Authors: Kieran Aggett, Tomás García, David Morgan, Mario Peláez-Fernández, Álvaro Mayoral, Raul Arenal, Benjamín Solsona, Pedro Amorós, and Stuart Taylor

This manuscript has been accepted after peer review and appears as an Accepted Article online prior to editing, proofing, and formal publication of the final Version of Record (VoR). The VoR will be published online in Early View as soon as possible and may be different to this Accepted Article as a result of editing. Readers should obtain the VoR from the journal website shown below when it is published to ensure accuracy of information. The authors are responsible for the content of this Accepted Article.

To be cited as: ChemCatChem 2025, e202401462

Link to VoR: https://doi.org/10.1002/cctc.202401462

RESEARCH ARTICLE

The Simultaneous Total Oxidation of Toluene, Propene and CO Environmental Pollutants Using Bimetallic Au-Pt/ZrO₂/UVM-7 Catalysts

Kieran J. Aggett,^a Tomás García,^b David J. Morgan,^a Mario Peláez-Fernández,^{c,d} Álvaro Mayoral,^c Raul Arenal,^{c,d,e} Benjamín E. Solsona,^f Pedro Amorós,^g Stuart H. Taylor ^{a*}

[a] Dr K. J. Aggett, Dr D. J. Morgan, Prof. S. H. Taylor

Cardiff Catalysis Institute, School of Chemistry

Cardiff University

Translational Research Hub, Maindy Road, Cardiff, CF24 4HF, UK

taylorsh@cardiff.ac.uk

[b] Dr T. García

Instituto de Carboquimica (ICB-CSIC)

C/Miguel Luesma Castán, 50018 Zaragoza, Spain.

[c] Dr M. Peláez-Fernández, Dr Á. Mayoral, Dr R. Arenal

Instituto de Nanociencia y Materiales de Aragón (INMA)

CSIC-Universidad de Zaragoza

Zaragoza 50009, Spain

[d] Dr M. Peláez-Fernández, Dr Á. Mayoral, Dr R. Arenal

Laboratorio de Microscopias Avanzadas (LMA)

Universidad de Zaragoza

Mariano Esquillor s/n, 50018 Zaragoza, Spain.

[e] Dr R. Arenal

ARAID Foundation

50018 Zaragoza, Spain.

[f] Prof. B. Solsona

Department of Chemical Engineering

University of Valencia

Av. Universitats s/n, 46100 Burjassot, Spain

[g] Prof. P. Amorós

Institut de Ciéncia dels Materials (ICMUV)

Universitat de València

Carrer del Catedrátic José Beltrán Martinez, 2, 46980 Paterna, València, Spain.

Abstract: Supported precious metal catalysts, containing either mono or bimetallic Au and Pt nanoparticles, anchored on a hierarchical porous UVM-7 silica structure, were prepared, and evaluated for the removal of volatile organic pollutants by oxidation. The catalysts were investigated for the simultaneous total oxidation of three model compounds: propene, toluene, and CO, commonly associated with 'cold start pollutants' in automotive exhausts. Only Au showed low catalytic activity, whilst Pt nanoparticles were active, with greater concentration of accessible Pt nanoparticles corresponding with increased catalytic activity. Interestingly, having both metals present on the same catalyst together was preferential for producing higher activity in the total oxidation of CO, propene, and toluene. The loadings of Pt nanoparticles on the catalyst surface, as well as the synthesis method were important controlling factors. The order of metal loading deposition was influential, depositing Au and Pt sequentially resulted in surface enrichment of the latter deposited metal, leading to enhanced catalytic performance. When Au and Pt were loaded simultaneously, alloy formation occurred and the surface Pt enrichment was more moderate, but still maintaining better catalytic performance compared with the pure Pt catalyst.

Introduction

Volatile organic compounds (VOCs) are a large category of the organic compounds emitted from natural or anthropogenic sources that enter the environment. Many studies have shown that anthropogenic VOCs are major contributors to air pollution, with the ability to react with NO_x species, forming photochemical smog, and as precursors to the formation of secondary aerosols. ^[1,2] Furthermore, VOCs promote adverse effects on human health and the environment. ^[3] The definition of a VOC is broad and encompasses a variety of compounds, with key examples being aliphatic and aromatic hydrocarbons. Automotive exhaust

RESEARCH ARTICLE

emissions and industrial processes are major sources of anthropogenic VOC emissions. [3,4] Regarding automotive exhaust emissions, a significant issue is the effect of cold start conditions. This can be defined by the engine and catalytic converter not yet operating at regular optimal temperature, resulting in higher rates of incomplete combustion. [5] These conditions can account for around 70 % of emissions during vehicle testing, and lead to greater VOC output due to exhaust catalysts not reaching light-off temperatures quick enough to remove the pollutants. [6,7] Of the prominent VOCs emitted from combustion engines, propene and toluene are of great concern due to their high Photochemical Ozone Creativity Potential (POCP). [8] Furthermore, aromatic VOCs, such as toluene and benzene, are also known to be highly toxic, [9] highlighting the importance of limiting VOC emissions. In addition to VOCs, carbon monoxide (CO) is also a common product emitted from combustion processes [10] and is known to be hazardous to human health under prolonged exposure. [11]

The utilisation of VOC and CO mixtures is therefore an effective model when studying abatement methods of these emissions from vehicle exhausts. The removal of mixtures containing chemically varying compounds, can prove challenging due to the complex nature of the system. Recovery methods tend to be less effective approaches of abatement for these types of emission sources, owing to the relatively low concentrations of pollutants emitted. [12] In contrast, catalytic oxidation is recognised as an efficient method for controlling and removing low concentrations of pollutant mixtures. Catalytic oxidation has the advantage of being less energy intensive compared with standard thermal oxidation, whilst also producing more environmentally benign products by minimising partial oxidation reactions. [13]

Supported precious metal catalysts are amongst the most effective catalysts for VOC oxidation. [14-18] Notably, supported Pt catalysts have been extensively studied for VOC total oxidation, presenting significant activity for aliphatic and aromatic hydrocarbons. [19-21] Alternatively, supported catalysts containing Au have shown considerable activity for CO oxidation. [19,22] More recently, studies have reported improved catalytic activity for total oxidation reactions when using bimetallic metal systems. [23-26] It is reported that bimetallic systems can manipulate factors such as metal particle size and distribution, improve stability, and form new active alloyed structures, which can enhance catalytic activity. [24,27-29] The use of mesoporous structures as supports for these catalysts can provide accessible pore networks for better diffusion of organic pollutants, as well as increasing nanoparticle dispersion and improve catalyst stability due to confinement effects. [30] However, these interactions are sometimes not enough to inhibit particle agglomeration. The addition of metal oxide promoters has been shown to enhance the stability of nanoparticles from sintering as discussed in previous literature. [31] Work prior to this publication screened different metal oxide supports over UVM-7 material and found ZrO₂ to be a suitable candidate. The addition of ZrO2 to catalyst systems is well regarded for its ability to enhance thermal stability, with the most commonly known example being the three-way catalyst for VOC oxidation. As Pt based catalysts are known to be efficient for VOC total oxidation, the enhancement of these catalysts, by

incorporating another metal onto the support, is an important focus of this research area. Previous work from the authors have demonstrated Au nanoparticles, anchored on metal oxides which are supported on a UVM-7 structure, were active and stable for the total oxidation of single pollutants: CO, propane and toluene. [30,32,33] It is therefore postulated that synergistic effects between the addition of Pt nanoparticles to a similar system could produce highly active catalysts for the simultaneous removal of both VOCs and CO.

Directives such as EURO 7 and The Paris Agreement provide increasing regulation of vehicle emissions, to reduce the number of pollutants emitted. With increased monitoring of pollutant concentrations, more practical assessment of catalytic abatement technology is required. Many studies use single organic compounds to model VOC abatement by catalytic oxidation. However, removing a combination of VOCs, with different chemical characteristics simultaneously, has grown in interest due to the correlation with real world conditions. [34] It is shown in the literature that mixtures of different pollutants can inhibit the removal of VOCs at low temperature, [35,36] requiring more active catalysts that are efficient at removing a combination of pollutants. In this work, a range of mono and bimetallic supported Pt-Au catalysts, prepared by colloidal deposition on the hierarchical porous UVM-7 silica support modified with ZrO2, were evaluated for the simultaneous total oxidation of toluene, propene, and CO under oxygen lean conditions. The gas mixture was used as an appropriate model to simulate cold start in vehicle engines, with propene and toluene VOCs used as a model for short chain alkene and aromatic compounds, respectively.

Results and Discussion

Catalyst Characterisation




Figure 1: PXRD patterns of the calcined catalysts.

An amorphous SiO_2 structure, expected from the UVM-7 support, [31] was predominantly shown in the Powder X-ray diffraction (PXRD) patterns of the catalysts (Figure 1). No reflections associated to Pt-containing crystalline phases were observed. Some crystalline tetragonal ZrO_2 species were identified, primarily around 30.3°and 50.0° (2 Θ) representing the (111) and (220)

RESEARCH ARTICLE

lattice planes, respectively. ^[40] Catalysts containing Au also exhibited a reflection around 38.9°, with a weaker reflection around 44.8°, which was ascribed to the Au (111) and (200) lattice planes respectively. ^[41]

TPR analysis (Figure 2) displayed similar reduction profiles for each supported metal catalyst. The ZrO₂/UVM-7 catalyst presented two weak reduction peaks, one at high temperature around 615 °C, and another broad low temperature peak around 330 °C. These peaks can be attributed to the reduction of coordinatively unsaturated Zr⁴⁺ surface species and bulk Zr⁴⁺ species, for the low temperature and high temperature peaks respectively. ^[42] For the supported metal catalysts, two reduction peaks were also identified, an intense peak centred around 520 °C and a small broad peak centred around 200 °C. The presence of these peaks shifting upon addition of Au or Pt metal nanoparticles to the support is in good agreement with previous literature, ^[43–45] where surface and bulk reduction of the Zr⁴⁺ species is enhanced by the supported metal nanoparticles.




Figure 2: TPR profiles of the calcined catalysts

Table 1: Summary of TPR data showing H₂ Consumption per gram of catalyst for both high temperature and low temperature peaks.

Catalyst	Low Temperature Peak Position / °C	High Temperature Peak Position / °C	Low Temperature H ₂ Consumption / μmol g ⁻¹	High Temperature H ₂ Consumption / μmol g ⁻¹
ZrO ₂ /UVM-7	329	619	4.25	2.33
ZrO ₂ /UVM-7 2% Au	236	525	5.35	28.05
ZrO ₂ /UVM-7 2% Pt	200	520	2.43	38.83
ZrO ₂ /UVM-7 2% Au-Pt	205	517	2.29	33.91
ZrO ₂ /UVM-7 1% Au + 1% Pt	204	514	1.16	29.25
ZrO ₂ /UVM-7 1% Pt + 1% Au	207	522	2.02	38.28

Table 1 shows the H_2 consumption per catalyst mass for both the low temperature and high temperature reduction features of ZrO_2 . The addition of metal nanoparticles to the ZrO_2 /UVM-7 catalyst increased the H_2 consumption for the high temperature peak, suggesting that addition of the metal nanoparticles facilitated the reduction of bulk Zr^{4+} species. In contrast, only the ZrO_2 /UVM-7 2% Au catalyst showed improved reduction of surface Zr^{4+} species, with all other catalysts presenting decreased H_2 consumption for the low temperature reduction peak.

CO-DRIFTS analysis (Figure 3) was used to identify the types of metal nanoparticles present on the catalyst surface. Catalysts ZrO₂/UVM-7 2% Au-Pt and ZrO₂/UVM-7 1% Au + 1% Pt displayed a distinctive band at 2075 cm⁻¹. This band was attributed to CO linearly adsorbed on Pt surface sites as suggested in previous literature. ^[46,47] It can be deduced from the presence of this band, that both these catalysts had accessible Pt surface species, which could participate in the oxidation reaction. Moreover, the absence of this band from ZrO₂/UVM-7 2% Pt and ZrO₂/UVM-7 1% Pt + 1% Au implies limited Pt surface species available on the catalysts. Bands related to the adsorption of CO on Au species, expected between 2110-2176 cm⁻¹, ^[48] were not present, possibly suggesting weak bonding due to limited available Au surface species. ^[49] A small residual band was identified at 1626 cm⁻¹ for the support and monometallic catalysts, which has previously




Figure 3: CO-DRIFTS spectra of the calcined catalysts.

been linked to the formation of mono and bicarbonate species on the support surface. [50]

XPS analysis (Figure 4) was used to determine species on the catalyst surface. All Au containing catalysts exhibited a metallic state indicated by the spin-orbit split peaks at 84.3 eV and 87.9 eV. [51] Further analysis of the Au peaks for the ZrO₂/UVM-7 2%

RESEARCH ARTICLE

Au-Pt catalyst revealed a Au species toward higher binding energy (4f_{7/2} 85.2 eV) typical of Au¹. [52] Previous work has stated the presence of Au¹ in AuPt/SiO₂ catalysts corresponded to interaction of the Pt and Au nanoparticles, by altering the electronic properties of the Au nanoparticles. [52] Therefore, a strong interaction of the Pt and Au nanoparticles for the ZrO₂/UVM-7 2% Au-Pt catalyst can be inferred, suggesting the possibility of alloy formation in this catalyst. However, it has been previously reported that Au species in this region can also be

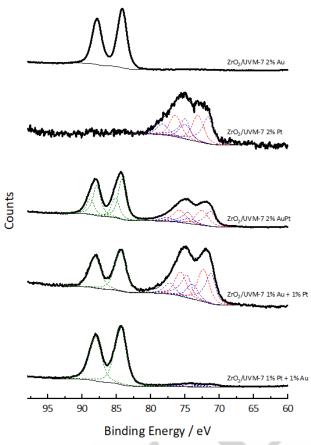


Figure 4: XPS spectra of the Au 4f and Pt 4f regions for the supported metal catalysts containing Au and Pt nanoparticles. Green curves represent the fitting of Au species. Purple, red, and blue curves represent the fitting of Pt⁰, Pt^{II} and Pt^{IV} species, respectively.

assigned as small Au nanoparticles or clusters. [53]

The Pt4f region exhibits a broad structure for all Pt containing catalysts. For the ZrO₂/UVM-7 2% Pt, ZrO₂/UVM-7 2% Au-Pt and ZrO₂/UVM-7 1% Au + 1% Pt catalysts, the Pt spectral envelope could be fitted to Pt⁰ (71.5 eV), Pt^{II} (73.1 eV) and Pt^{IV} (75 eV) species. [54,55] For the ZrO₂/UVM-7 1% Pt + 1% Au catalyst, the data could only be fitted to two Pt species, Pt0 and Pt1V. An observed shift to lower binding energies for the Pt species was noticed in the bimetallic catalysts, with an average shift of -0.5 eV for ZrO₂/UVM-7 2% Au-Pt, -0.7 eV for ZrO₂/UVM-7 1% Au + 1% Pt and -1.3 eV for ZrO₂/UVM-7 1% Pt + 1% Au. This shift to lower binding energies is proposed to occur as a result of the charge transfer from the interaction of Pt with Au nanoparticles, as shown in previous literature. [56,57] These data also suggest intimate contact of the different metal nanoparticles for the bimetallic catalysts, with stronger electron interaction implying the possibility of alloy formation.

Table 2: Surface species of Pt nanoparticles on Pt containing catalysts, identified by XPS analysis.

Catalyst	Pt ⁰ / %	Pt"/%	Pt ^{IV} / %
ZrO ₂ /UVM-7 2% Pt	42.3	37.9	19.8
ZrO ₂ /UVM-7 2% Au-Pt	42.7	42.8	14.5
ZrO ₂ /UVM-7 1% Au + 1%	42.4	39.6	18.0
Pt			
ZrO ₂ /UVM-7 1% Pt + 1%	67.9	-	32.1
Au			

Quantification of the Pt speciation (Table 2) indicated little difference in the relative concentrations of Pt species. Catalysts $ZrO_2/UVM-7\ 2\%$ Pt, $ZrO_2/UVM-7\ 2\%$ Au-Pt and $ZrO_2/UVM-7\ 1\%$ Au + 1% Pt showed similar concentrations of metallic Pt 0 but had slight variations in Pt II and Pt IV concentrations. However, the $ZrO_2/UVM-7\ 1\%$ Pt + 1% Au catalyst showed considerable differences in Pt surface species, which was highlighted due to the absence of Pt II , resulting in a much larger concentration of both Pt 0 and Pt IV species.

Table 3: Catalyst surface composition, determined by XPS analysis.

								-
	Catalyst	Zr/	Pt/	Au/	Si/	0/	C/	
		At.	At.	At.	At.	At.	At	
1		%	%	%	%	%	%	
	ZrO ₂ /UVM-7	2.0	-	-	30.8	62.7	4.5	
	ZrO ₂ /UVM-7	2.6	-	1.0	28.1	62.0	6.3	
	2% Au							
	ZrO ₂ /UVM-7	2.2	0.1	-	29.4	61.5	6.8	
	2% Pt							
	ZrO ₂ /UVM-7	2.2	0.7	0.7	26.5	58.8	11.	
	2% Au-Pt						0	
	ZrO ₂ /UVM-7	2.4	0.5	0.2	28.6	61.6	6.7	
	1% Au + 1% Pt							
	ZrO ₂ /UVM-7	2.4	0.1	0.9	28.2	61.7	6.7	
	1% Pt + 1% Au							

All catalysts had a similar surface composition of Zr, when analysed by XPS, with concentrations ranging from 2-2.6 At.%, indicating strong interaction with the UVM-7 support (Table 3). However, the surface concentrations of supported metal nanoparticles varied for all catalysts. For the monometallic catalysts, increased surface loading of Au was identified for ZrO₂/UVM-7 2% Au, compared with the Pt loading on the ZrO₂/UVM-7 2% Pt catalyst. When analysing the bimetallic catalysts, ZrO₂/UVM-7 2% Au-Pt displayed modest surface concentrations of both Pt and Au, with a near 1:1 ratio, which was in good agreement with the theoretical ratio expected. In contrast, this 1:1 surface ratio was not seen in the catalysts with differing orders of metal loading. The ZrO₂/UVM-7 1% Au + 1% Pt catalyst showed lower concentrations of surface Au and Pt; however, Pt enrichment was noted, with an Au-Pt ratio of 1:2. Whereas, the ZrO₂/UVM-7 1% Pt + 1% Au catalyst presented a 10:1 Au-Pt ratio. with a much higher surface concentration of Au.

These data demonstrate the importance of the order of metal loading on relative surface concentration. It is suggested that

RESEARCH ARTICLE

during sequential synthesis the second metal is deposited preferentially on the first metal, resulting in a surface enrichment of the latter metal. Previous studies have shown that preparation of bimetallic catalysts with a different metal deposition order exhibited little difference in the surface elemental composition, which is in contrast to XPS data shown in this work. [23,58] However, this could be a result of the different preparation methods used.

Colloidal deposition methods disconnect nanoparticle formation from the deposition step, carefully controlling influences of nanoparticle dispersion and particle size when preparing supported metal catalysts. [59] The use of this method in the current work emphasises the order of metal loading as an influential factor for the XPS surface concentrations identified.

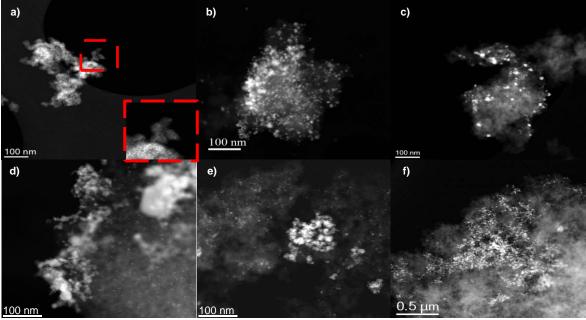


Figure 5: Low magnification Cs-corrected STEM-HAADF images of the calcined catalysts. a) ZrO₂/UVM-7 b) ZrO₂/UVM-7 2% Au c) ZrO₂/UVM-7 2% Pt d) ZrO₂/UVM-7 2% Au-Pt e) ZrO₂/UVM-7 1% Au + 1% Pt f) ZrO₂/UVM-7 1% Pt + 1% Au.

Cs-corrected STEM-HAADF images (Figures 5a-f) indicated heterogeneously distributed Au and Pt metal nanoparticles on the ZrO₂/UVM-7 material for all the catalysts. However, a homogeneous distribution of ZrO₂ was observed by EDX analysis for all the catalysts, which is in good agreement with conclusions drawn from XPS analysis. Both EDX and XPS techniques suggest a strong interaction between the ZrO₂ and UVM-7 material, which could suggest confinement of the ZrO₂ as shown previously for TiO₂. ^[32] Cs-corrected STEM-EDX analysis identified Au and Pt nanoparticles for each of the monometallic catalysts, respectively. The ZrO₂/UVM-7 2% Au catalyst (Figure 6a) had a large quantity of Au nanoparticles, with a size distribution between 2-10 nm and mean particle size of 4.7 nm \pm 1.6 nm. More Pt nanoparticles were

identified on the ZrO₂/UVM-7 2% Pt catalyst, compared with Au nanoparticles on the monometallic Au catalyst, which was in contrast with the surface composition identified by XPS analysis. Furthermore, both small and larger clusters of Pt nanoparticles were identified (Figure 6b), resulting in a broader particle size distribution (2-20 nm), with a mean particle size of 6.0 nm \pm 5.7 nm. The slight difference in the surface and bulk nanoparticles identified by both XPS and EDX could suggest migration to the internal porosity of the UVM-7 structure, as very large particles were not identified. It can also be seen from the EDX images in Figure 6 that Au and Pt nanoparticles were preferentially bound to the ZrO₂ support.

RESEARCH ARTICLE

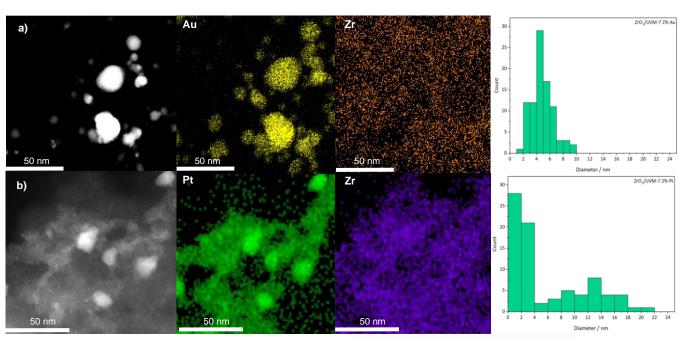


Figure 6: Cs-corrected STEM-HAADF with corresponding EDX images and particle size histograms of a) ZrO₂/UVM-7 2% Au and b) ZrO₂/UVM-7 2% Pt catalysts.

Both Au and Pt nanoparticles were identified by Cs-corrected STEM-EDX analysis for all bimetallic catalysts. The bimetallic catalysts showed co-located Au and Pt (Figure 7a-c), which suggests strong Au-Pt nanoparticle interaction. This was selfconsistent with conclusions drawn from XPS analysis, suggesting the strong metal nanoparticle interaction resulted in the Pt species shifting to lower binding energies. Alloyed metal nanoparticles were observed in the ZrO₂/UVM-7 2% Au-Pt catalyst, with a large size distribution range of 3-100 nm and mean particle size of 6.5 nm ± 6 nm. The presence of alloy formation may help to explain the appearance of Aul species in the XPS data, reinforcing the suggestion of a strong electronic interaction of the Au-Pt species identified for this catalyst. It is also unlikely the shift in binding energy for the Au species in the XPS data was related to nanoparticle size, as little difference in average particle size is observed for the bimetallic catalysts. A heterogeneous particle

size distribution was observed for the ZrO₂/UVM-7 1% Au + 1% Pt catalyst, with a mean particle size of 5.9 nm ± 5 nm. Both Au and Pt nanoparticles of >10 nm were formed, however, smaller nanoparticles (<5 nm), that were Pt rich, were also identified. The particle size distribution of the ZrO₂/UVM-7 1% Pt + 1% Au catalyst was comparable to the ZrO2/UVM-7 1% Au + 1% Pt catalyst, but the smaller nanoparticles (<5 nm) were Au rich, and the mean particle size was slightly larger at 7.3 nm \pm 4.1 nm. There was little significant difference in the average metal nanoparticle size across the range of catalysts, which was expected for the colloidal preparation method employed. The size distribution was larger for the bimetallic catalysts; however, this is likely to occur from the possible agglomeration of nanoparticles during the two-stage calcination process for the sequential preparation method and formation of alloy nanoparticles for the simultaneous preparation method.

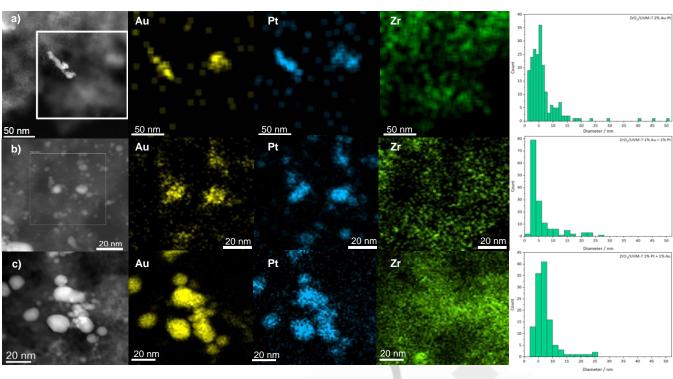


Figure 7: Cs-corrected STEM-HAADF images with corresponding EDX images and particle size histograms for the bimetallic catalyst: a) ZrO₂/UVM-7 2% Au-Pt b) ZrO₂/UVM-7 1% Au + 1% Pt c) ZrO₂/UVM-7 1% Pt + 1% Au.




Figure 8: CO2 yield acquired for the simultaneous total oxidation of toluene, propene, and CO gas mix. Conditions: 100 ppm toluene, 1000 ppm propene, 1000 ppm CO, 6% O₂/N₂, WHSV = 60000 mL g⁻¹ h⁻¹. Legend refers to catalysts used.

Catalytic performance for the simultaneous total oxidation of propene, toluene and CO is displayed in Figure 8 for all catalysts. CO₂ yield from the mixture was used to assess the overall

catalytic activity for the combined total oxidation. The only product identified by FTIR analysis was CO₂, with all catalysts obtaining a carbon balance >94 % and in the 98-102% range at conversions higher than 15%. The ZrO₂/UVM-7 1% Au + 1% Pt catalyst presented the highest catalytic activity, with all reactant compounds oxidised at 250°C. Appreciable catalytic activity was also identified for the ZrO₂/UVM-7 2% Au-Pt catalyst, also reaching full conversion at 250°C. However, this catalyst showed a lower CO₂ yield at temperatures under 250°C, which could inhibit the effectiveness when considering the application for emissions during the cold start period. The catalytic activity for the ZrO₂/UVM-7 2% Au catalyst was of particular interest as the addition of Au to the support resulted in poorer activity when compared to the ZrO₂/UVM-7 support material.

The total oxidation of individual components in the gas mixture are shown in Figure 9. The general trend of catalyst activity for each component is similar to the overall CO_2 yield presented, with the $ZrO_2/UVM-7$ 1% Au+1% Pt catalyst being the most active for all compounds. Only a slight deviation from the trend was observed for the oxidation of CO and toluene, where the $ZrO_2/UVM-7$ 2% Au catalyst showed slightly improved conversion at low temperatures for CO oxidation and the $ZrO_2/UVM-7$ 1% Pt + 1% Au catalyst presented lower conversion than the support at $300^{\circ}C$ for toluene oxidation.

RESEARCH ARTICLE

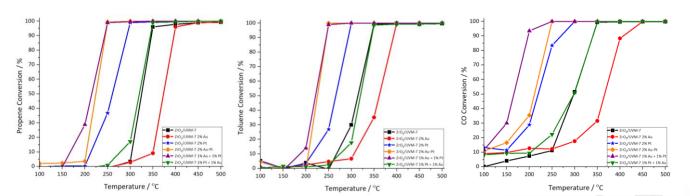


Figure 9: Breakdown of the catalytic activity for the total oxidation of individual pollutants in the mixed gas feed. Propene (Left), toluene (Middle) and CO (Right).

Conditions: 100 ppm toluene, 1000 ppm propene, 1000 ppm CO, 6% O₂/N₂, WHSV = 60000 mL g⁻¹ h⁻¹.

Previous literature has shown that the addition of a metal oxide onto a non-reducible support, such as Al₂O₃ or SiO₂, can improve the catalytic activity of supported metal catalysts for CO and VOC oxidation. ^[15,60,61] The metal oxide provides the beneficial role of supplying active oxygen species on the catalyst surface, which then enhances catalytic activity of the metal nanoparticles. ^[62,63] The promotion of active oxygen species has often been linked with surface reducibility of the catalyst, relating to the facile mobility of oxygen species. ^[61,64,65] In this work, no significant trend was distinguished between catalyst surface reducibility and catalytic activity. In fact, TPR analysis showed that the ZrO₂/UVM-7 2% Au catalyst, with the highest surface H₂ consumption, was the least active catalyst, implying other factors were important for controlling the activity. Therefore, the influence of metal nanoparticle loading had the largest impact on the overall catalytic activity.

The role of metal nanoparticles in supported precious metal catalysts are widely reported as an important factor for VOC and CO oxidation. [26,34,66,67] From the testing data in this work (Figure 8), catalysts containing high concentrations of Au nanoparticles, determined by XPS, showed poorer catalytic activity. Similar conclusions have been reported in previous studies for the individual total oxidation of toluene and propene, where supported Au catalysts presented lower VOC conversion compared with Pt or Pd counterparts. [14,45,68] The lower catalytic activity was proposed to occur as a result of the differing intrinsic dissociative chemisorption energies of oxygen, which is related to the role of oxygen adsorption in the oxidation mechanism. [19] However. supported Au catalysts have been reported as effective catalysts for CO oxidation. [69,70] The prevalence for effective CO oxidation is presented by the ZrO₂/UVM-7 2% Au catalyst, as it showed improved performance at low temperatures (Figure 9). Previous literature discussing the simultaneous removal of VOCs and CO. highlighted that VOCs competitively bind to the catalyst surface. blocking active sites, negatively impacting on the rate of CO oxidation. [34,71] Therefore, the efficiency of supported Au catalysts for CO oxidation were decreased under the reaction conditions

From the previous discussion, it can be inferred that Pt was the most active species for the simultaneous total oxidation of CO, propene, and toluene. This hypothesis also fits well with surface compositions determined by XPS analysis, when related to the catalytic activity. A structure sensitive relationship has been determined for toluene and propene oxidation using supported Pt catalysts. ^[19,20,72,73] It has been shown that increased Pt particle

size results in adsorbed oxygen on Pt with a lower bond strength, facilitating improved catalytic activity for toluene oxidation. ^[74] This differs to propene oxidation, where this affect is slightly less direct and can also be somewhat related to higher concentrations of metallic Pt⁰ species. ^[72] Little significant difference in nanoparticle size was determined by Cs-corrected STEM-EDX analysis, suggesting this factor did not play an important role in determining the catalytic activity.

Little direct correlation between catalytic activity and the types of Pt surface species could be identified for these catalysts. There was negligible difference in Pt⁰ concentration and little significant difference in PtII and PtIV concentrations for the most active catalysts from the XPS data. Furthermore, a structure sensitive relationship was not exhibited by these catalysts, as the ZrO₂/UVM-7 1% Au + 1% Pt catalyst contained a higher quantity of smaller Pt nanoparticles (<5 nm), determined by STEM analysis, compared with the ZrO₂/UVM-7 2% Pt catalyst, which showed lower catalytic activity. Therefore, the controlling factor determining catalytic activity was suggested to be the relative concentration of Pt on the catalyst surface, in comparison to the quantity of the less active Au nanoparticles. This trend is highlighted in Figure 10 by the direct correlation between decreasing temperature required to obtain 50% conversion (T₅₀) and increasing relative Pt concentration. CO-DRIFTS analysis further highlights the importance of surface Pt species, as the data indicated accessible surface Pt species for the ZrO2/UVM-7 2% Au-Pt and ZrO₂/UVM-7 1% Au + 1% Pt catalysts only, which were concurrent with the improved activity of these catalysts. In contrast, an absence of Pt bands was displayed for the ZrO₂/UVM-7 2% Pt catalyst, possibly as a result of the low surface Pt loading, measured by XPS analysis.

RESEARCH ARTICLE




Figure 10: Relative Pt surface concentrations, identified by XPS analysis, compared with T₅₀ values for the bimetallic Au-Pt catalysts.

The $ZrO_2/UVM-7$ 2% Au-Pt and $ZrO_2/UVM-7$ 1% Au + 1% Pt catalysts, with higher surface Pt concentrations, presented higher activity than the monometallic Pt catalyst. The improved

performance of these bimetallic catalysts implies the addition of Au into the preparation method enhanced surface loading of Pt nanoparticles. Previous literature has suggested that Pt surface enrichment can occur in AuPt systems, due to the stronger affinity for adsorbates, forming stable oxides on the surface. $^{[75]}$ XPS data correlates well with this idea as the ZrO₂/UVM-7 1% Pt + 1% Au catalyst presented a larger quantity of Pt 0 species, with less stable Pt oxide species formed, resulting in little surface migration.

The order of metal loading also significantly affected Pt loading on the catalyst surface. Depositing the metals sequentially caused a drastic change in catalytic activity, predominantly as a result of the improved surface concentration of Pt when it was deposited last (ZrO₂/UVM-7 1% Au + 1% Pt). However, depositing Au and Pt simultaneously led to both metal nanoparticles being evenly distributed on the surface, as demonstrated by the formation of alloyed nanoparticles in the Cs-corrected STEM-EDX analyses. The formation of alloyed nanoparticles resulted in a 1:1 surface ratio of Au-Pt, which led to slightly lower activity compared with the Pt rich 1:2 Au-Pt surface ratio obtained for the ZrO₂/UVM-7 1% Au + 1% Pt catalyst. This further highlights the negative impact caused by the increased amount of less active Au nanoparticles for the simultaneous oxidation of CO, propene, and toluene in this system.

Table 4: Comparison of the total oxidation of VOC mixtures reported in the literature.

WHSV	Reaction Conditions	T ₅₀ ^a / °C	Reference
60000 mL g ⁻¹ h ⁻¹	1000 ppm propene, 1000 ppm CO, 100 ppm toluene, 6% O ₂	215 (Propene), 221 (Toluene), 166 (CO)	This work
Au/Co-UVM-7 40000 mL g ⁻¹ h ⁻¹ 1000 ppm toluene, 20% O ₂		255	Previous work [30]
25000 mL g ⁻¹ h ⁻¹	1000 ppm propene, 1000 ppm	210 (Propene),	[76]
	CO, 100 ppm toluene, 6% O ₂	160 (Toluene),	
4		119 (CO)	
60000 mL g ⁻¹ h ⁻¹	10000 ppm CO, 1000 ppm	168 (CO), 182	[34]
	toluene, 20% O ₂	(Toluene)	
60000 mL g ⁻¹ h ⁻¹	10000 ppm CO, 1000 ppm	174 (CO), 180	[36]
	toluene, 20% O ₂	(Toluene)	
60000 mL g ⁻¹ h ⁻¹	1000 ppm toluene, 1000 ppm CO, 20% O ₂	248 (Toluene)	[77]
60000 mL g ⁻¹ h ⁻¹	1000 ppm toluene, 3000 ppm	~225 (Toluene),	[23]
	propene, 20% O ₂	~230 (Propene)	
30000 mL g ⁻¹ h ⁻¹	1000 ppm VOCs (ethylene,	231 (Conversion	[78]
	propylene, toluene), 20% O ₂	to CO ₂)	
	60000 mL g ⁻¹ h ⁻¹ 40000 mL g ⁻¹ h ⁻¹ 25000 mL g ⁻¹ h ⁻¹ 60000 mL g ⁻¹ h ⁻¹ 60000 mL g ⁻¹ h ⁻¹ 60000 mL g ⁻¹ h ⁻¹	60000 mL g ⁻¹ h ⁻¹ 1000 ppm propene, 1000 ppm CO, 100 ppm toluene, 6% O ₂ 40000 mL g ⁻¹ h ⁻¹ 1000 ppm toluene, 20% O ₂ 25000 mL g ⁻¹ h ⁻¹ 1000 ppm propene, 1000 ppm CO, 1000 ppm CO, 1000 ppm toluene, 20% O ₂ 60000 mL g ⁻¹ h ⁻¹ 10000 ppm CO, 1000 ppm toluene, 20% O ₂ 60000 mL g ⁻¹ h ⁻¹ 10000 ppm CO, 1000 ppm CO, 1000 ppm toluene, 20% O ₂ 60000 mL g ⁻¹ h ⁻¹ 1000 ppm toluene, 1000 ppm CO, 20% O ₂ 60000 mL g ⁻¹ h ⁻¹ 1000 ppm toluene, 3000 ppm propene, 20% O ₂	60000 mL g ⁻¹ h ⁻¹ 1000 ppm propene, 1000 ppm CO, 100 ppm toluene, 6% O ₂ 221 (Toluene), 166 (CO) 40000 mL g ⁻¹ h ⁻¹ 1000 ppm toluene, 20% O ₂ 255 25000 mL g ⁻¹ h ⁻¹ 1000 ppm propene, 1000 ppm CO, 100 ppm toluene, 6% O ₂ 160 (Toluene), 119 (CO) 60000 mL g ⁻¹ h ⁻¹ 10000 ppm CO, 1000 ppm toluene, 20% O ₂ 174 (CO), 180 (Toluene) 60000 mL g ⁻¹ h ⁻¹ 10000 ppm toluene, 1000 ppm CO, 20% O ₂ 60000 mL g ⁻¹ h ⁻¹ 10000 ppm toluene, 1000 ppm CO, 20% O ₂ 60000 mL g ⁻¹ h ⁻¹ 1000 ppm toluene, 3000 ppm CO, 20% O ₂ 60000 mL g ⁻¹ h ⁻¹ 1000 ppm toluene, 3000 ppm CO, 20% O ₂ 225 (Toluene) -225 (Toluene), -230 (Propene) 30000 mL g ⁻¹ h ⁻¹ 1000 ppm VOCs (ethylene, 231 (Conversion

The catalysts discussed in this work show promise as effective catalysts for low temperature simultaneous oxidation of VOCs and CO. Specifically the ZrO $_2$ /UVM-7 1% Au + 1% Pt catalyst showed key improvements from previous work by the authors for the total oxidation of toluene (Table 4). The ZrO $_2$ /UVM-7 1% Au + 1% Pt catalyst displayed a lower T $_{50}$ compared with the Au/Co-UVM-7 catalyst, with the current work including the influence of

other VOCs in the gas feed. It is difficult to directly compare the catalysts in this work with those shown in Table 4, due to the varying reaction conditions used. However, the catalysts in this work exhibited comparable, if not improved, T₅₀ values with most of those displayed in Table 4. Furthermore, the conditions in the present work are generally closer to those applicable to automotive emissions, where oxygen concentrations are between

 $^{^{\}rm a}$ $T_{\rm 50}$ – Temperature at which 50 % conversion is obtained.

RESEARCH ARTICLE

5-10%. ^[79] It should be highlighted that the "mixture effect", where multiple pollutants are present in a gas stream, has limited understanding on the inhibitor and promotional effects for different combinations of VOCs. ^[80] Therefore, further research is required in this area to provide clarity for different systems.

Interestingly, the work published on the 3% Au/CeO $_2$ catalyst by Eaimsumang et al. $^{[76]}$ presented slightly improved T_{50} values compared with the ZrO_2 /UVM-7 1% Au + 1% Pt catalyst, however, a much lower WHSV was used. The contrast in activity for Au between the two studies shows the importance of the support. Additionally, CeO_2 is active for the total oxidation of toluene, $^{[81,82]}$ which will contribute to the efficient oxidation of this compound in the mixture. However, a significant limitation of CeO_2 based materials is the poor thermal stability, making them susceptible to sintering and deactivation. $^{[83]}$

Catalyst Stability

Catalyst stability is an important factor that needs to be considered. Previously, modified UVM-7 catalysts have displayed good thermal stability towards Au sintering. This was a result of the confinement architecture of the silica structure and strong anchoring onto the supported metal oxides that were homogeneously dispersed within the structure. [84] Catalytic cycle tests were carried out on the most active catalyst, to assess the stability. The ZrO₂/UVM-7 1% Au + 1% Pt catalyst remained active with consistent performance for the total oxidation of toluene, propene, and CO after three consecutive cycles (Figure 11). This cyclic stability was also observed when the temperature was increased up to higher temperatures (600°C or even 700°C) for 10 minutes.

The considerable stability of this material highlights the UVM-7 structure as a suitable candidate for further modification when designing effective catalysts for the simultaneous total oxidation of VOCs and CO.




Figure 11: Consecutive cycle tests for the simultaneous total oxidation of toluene, propene and CO using the ZrO₂/UVM-7 1% Au + 1% Pt catalyst. Conditions: 100 ppm toluene, 1000 ppm propene, 1000 ppm CO, 6% O2/N2, WHSV = 60000 mL g⁻¹ h⁻¹. Legend refers to catalyst cycle.

Conclusion

Mono and bimetallic Au-Pt catalysts, prepared using a novel ZrO₂/UVM-7 support, were assessed for the simultaneous total oxidation of toluene, propene, and CO under oxygen lean conditions. The gas mixture was used as a model as it represents significant emissions present during cold start in automotive engines. The ZrO₂/UVM-7 1% Au + 1% Pt catalyst in which Au is firstly deposited and then Pt, was the most active for the simultaneous total oxidation of all three compounds, attaining full conversion by 250°C. The enhanced activity of this catalyst corresponded with the high relative surface concentration of Pt nanoparticles, which were identified as the active component for the reaction. For the bimetallic catalysts, the order of metal nanoparticle deposition was an important factor for controlling catalytic activity. Sequential loading of Pt and Au nanoparticles resulted in higher surface concentrations of active Pt nanoparticles and less active Au nanoparticles on the catalyst surface. In contrast, simultaneous addition of the metal nanoparticles formed alloyed nanoparticles with a 1:1 ratio on the catalyst surface. The alloyed nanoparticles displayed slightly lower catalytic activity likely due to the increased surface concentration of Au. Finally, the optimal catalyst demonstrated to be completely stable in the simultaneous CO, propene, and toluene removal after three catalytic cycles.

Experimental

Catalyst Synthesis

Preparation of the UVM-7 support was synthesised by a method based on the atrane route, [37] with a molar composition of 2Si(OC₂H₅)₄:7(HOCH₂CH₂)₃N.HCl:0.52CH₃(CH₂)₁₅N(Br)(CH₃)₃:1 80H₂O. In a standard synthesis, corresponding amounts of Si(OC₂H₅)₄ and (HOCH₂CH₂)₃N.HCl were mixed continuous stirring at 140°C, forming a homogeneous dispersion. temperature was then set to 120°C CH₃(CH₂)₁₅N(Br)(CH₃)₃ was incorporated. The resulting gel was then cooled to 80°C, followed by the addition of deionised water. The mixture was stirred and aged at room temperature for 16 h. The mesostructured powder was separated by filtration and washed extensively with deionised water and ethanol. Finally, the powder was dried for 16 h at 60°C. To prepare the final porous material, the template was removed by calcination at 550°C for 6 h under static air, with a ramp rate of 5°C min⁻¹ from ambient.

Preparation of the 40 wt% ZrO₂/UVM-7 support was achieved using a wet impregnation method. ZrO(NO₃)₂.xH₂O (1.48 g) was dissolved in 30 mL of deionized water under vigorous stirring. The UVM-7 material (0.6 g) was added to the nitrate solution, followed by stirring the sample for 13 h. The mixture was then dried overnight at 110°C and the resulting material was calcined in air at 550°C for 4 h, with a ramp rate of 1°C min⁻¹ from ambient.

A 40 wt%ZrO₂/UVM-7 support was selected as previous work showed poor catalytic activity for Au-Pt based catalysts deposited on pure ZrO₂ and pure siliceous UVM-7 compared with ZrO₂/UVM-7. Different ZrO₂ loadings were tested and found that

RESEARCH ARTICLE

40 wt.%ZrO $_2$ was optimal. A comparison of metal oxide supports was also carried out and found the ZrO $_2$ was the most active support. Examples of these preliminary tests are shown as supporting information (Figs S1 & S2).

Mono and bimetallic Pt/Au supported catalysts were synthesised by a colloidal deposition method. To synthesise the Au/Pt colloids, fresh aqueous solutions of (HOCH₂)₄PCI (0.0675 M) and NaOH (0.2 M) were prepared by adding 1.5 mL of NaOH and 1 mL of (HOCH₂)₄PCI to 45.5 mL of deionized water. An appropriate amount of aqueous Au or Pt precursor solution (KAuCl₄ or PtCl₄) was then added under vigorous stirring at 60°C. The hydrosols were stirred for 30 minutes, followed by the addition of the desired amount of 40 wt% ZrO₂/UVM-7 (acidified to pH 2 by H₂SO₄) to obtain the required metal loading. The slurry was stirred for 2 h, collected by filtration and then washed thoroughly with deionised water and dried at 120°C for 16 h in static air. The final material was calcined in air at 400°C for 2 h, heating from ambient with a ramp rate of 5°C min⁻¹. For the bimetallic catalysts, the required amounts of aqueous KAuCl₄/PtCl₄ solutions were added simultaneously. However, for the catalysts prepared by different orders of loading, the aqueous KAuCl₄/PtCl₄ solutions were added consecutively with the drying and calcination processes occurring between each metal loading.

Catalyst Characterisation

Powder X-ray diffraction (XRD) was performed using a Panalytical X'Pert diffractometer, equipped with a Cu X-ray source. Operating conditions for the diffractometer were 40 kV and 40 mA, with analysis carried out between 20 values of 5-80°. Phase identification was performed by matching patterns against the ICDD standard database. Application of the Scherrer equation was used to estimate crystallite size.

Temperature programmed reduction (TPR) was performed using a Quantachrome ChemBET. Catalysts underwent pre-treatment for 1 h at 120°C in a flow of He before analysis. Reduction profiles were obtained by analysing powdered catalysts (50 mg) under a flow of 10% H₂/Ar (50 mL min⁻¹), over the temperature range 50-700°C, with a heating rate of 10°C min⁻¹. H₂ consumption was calculated by calibration against a CuO standard.

X-ray photoelectron spectroscopy (XPS) was performed on a Thermo Fisher Scientific K-alpha+ spectrometer. Samples were analysed using a micro-focused monochromatic Al x-ray source (72 W) using the "400-micron spot" mode, which provides an analysis defining elliptical x-ray spot of ca. 400 x 600 microns. Data was recorded at pass energies of 150 eV for survey scans and 50 eV for high resolution scans with step sizes of 1 eV and 0.1 eV respectively, the dwell time was 50 ms and 10 ms in each case. As the samples were insulating charge compensation was achieved using a combination of both low energy electrons and argon ions.

Data analysis was performed in CasaXPS v2.3.26 [38] after calibrating the data to the lowest C(1s) component taken to have

a value of 284.8 eV. Quantification was made using a Shirley type background and Scofield cross sections, with an electron energy dependence based on the TPP-2M relationship. ^[39] Peak fitting was performed using the CasaXPS LA line shape which is Voigtlike. All parameters for LA shape were derived from standard reference materials where possible.

CO-Diffuse Reflectance Infrared Fourier Transformed Spectroscopy (DRIFTS) measurements were obtained using a Bruker Tensor 27 spectrometer, fitted with a Hg-Cd-Te detector and ZnSe windows. Powder samples were loaded into the Praying Mantis high temperature (HVC-DRP-4) in situ cell, followed by a pre-treatment with flowing N2 (50 mL min-1). A background was obtained using KBr and measurements were recorded every minute at room temperature. 1% CO/N2 was flowed over the sample at 50 mL min⁻¹ until CO adsorption bands were maintained constant. Once CO bands were constant, the gas feed was changed to purge with N2, and measurements were made until no change in subsequent spectra were observed.

Electron microscopy analyses were carried out in a FEI XFEG Titan transmission electron microscope operated at 300 kV. The column was fitted with a CEOS spherical aberration corrector (Cscorrected) for the electron probe assuring a spatial resolution of 0.8 Å (prior each analysis, the aberrations were reduced a gold standard sample). The microscope was also equipped with an Oxford Ultim X-MaxN 100TLE X-EDS detector and a Gatan Tridiem Energy Filter (GIF) for electron energy loss spectroscopic (EELS) measurements. The samples were prepared by dispersing a small amount of the powder in ethanol; few drops of the suspension were placed onto holey carbon grids. All measurements were performed in Scanning mode (STEM) using a high angle annular dark field detector (HAADF).

Catalyst Testing

The simultaneous total oxidation of propene, toluene and CO was performed using a fixed bed flow microreactor. Powder catalysts (50 mg) were packed between plugs of quartz wool in a 1/2 inch quartz tube. Catalysts were pre-treated for 1 h at 100°C, under a flow of N₂ at 50 mL min⁻¹. Following pre-treatment, the reaction mixture of 1000 ppm propene, 1000 ppm CO and 100 ppm toluene in 6% O₂ with N₂ balance was passed through the bypass loop until stabilised, to acquire a background measurement. The reaction gas mixture was then passed through the catalyst bed at 50 mL min⁻¹ to achieve a WHSV of 60000 mL g⁻¹ h⁻¹. Catalyst activity was measured over the temperature range 100-500°C at 50°C intervals (allowing time to reach steady state), with a K-type thermocouple placed in the catalyst bed to monitor the reaction temperature. The effluent analysis was recorded by a quantitative on-line Gasmet DX-4000 FT-IR process spectrometer, with measurements taken every second, Calcmet software was used to convert measured response to quantitative concentrations using a library of calibration files. An average of 10 measurements was recorded at each temperature interval once steady state had been achieved. CO₂ yield was used to define the conversion of propene, toluene, and CO to CO2. The recorded concentration of

RESEARCH ARTICLE

 ${\rm CO_2}$ was compared to the sum of all compound concentrations, using carbon equivalents. Catalyst testing errors were calculated using the standard deviation when testing a standard catalyst three times under the stated reaction conditions. For ${\rm CO_2}$ yield, the error was \pm 3%.

Acknowledgements

AM, MPF and RA acknowledge the Spanish MICIU for funding (CEX2023-001286-S MICIU/AEI /10.13039/501100011033) as well as the regional government of Aragon (DGA E13_23R). The microscopy works have been conducted in the Laboratorio de Microscopias Avanzadas (LMA) at the Universidad de Zaragoza. AM acknowledges the Spanish Ministry of Science (RYC2018-024561-I). RA and AM also acknowledge the support of the Spanish MICIU (PID2023-151080NB-100/AEI/10.13039/501100011033 and CNS2023-144346-AEI /10.13039/501100011033, respectively). MPF acknowledges the support of the Spanish MICIU (Ayudas Margarita Salas).

Keywords: Heterogeneous Catalysis, Oxidation, Environmental Chemistry, Gas-phase reactions, Nanoparticles

References

- [1] Z. H. Ling, H. Guo, Environ. Sci. Policy 2014, 38, 180-191.
- P. Jookjantra, S. Thepanondh, J. Keawboonchu, V. Kultan, W. Laowagul, J. Environ. Qual. 2022, 51, 1016–1034.
- [3] D. J. Wuebbles, S. Sanyal, Curr. Pollut. Rep. 2015, 1, 117-129.
- [4] A. Ragothaman, W. A. Anderson, *Environments* **2017**, *4*, 66.
- [5] M. S. Reiter, K. M. Kockelman, *Transp. Res. Part Transp. Environ.* 2016, 43, 123–132.
- [6] L. Fang, D. Lou, Z. Hu, P. Tan, *Energies* **2019**, *12*, 3556.
- [7] Z. Zhang, H. Man, J. Zhao, Y. Jiang, M. Zeng, Z. Cai, C. Huang, W. Huang, H. Zhao, S. Jing, X. Shi, K. He, H. Liu, J. Hazard. Mater. 2022, 435, 128979.
- [8] M. Ousmane, L. F. Liotta, G. D. Carlo, G. Pantaleo, A. M. Venezia, G. Deganello, L. Retailleau, A. Boreave, A. Giroir-Fendler, *Appl. Catal. B Environ.* 2011, 101, 629–637.
- [9] F. Pariselli, M. G. Sacco, J. Ponti, D. Rembges, *Exp. Toxicol. Pathol.* 2009, 61, 381–386.
- [10] J.-O. Jo, H. Q. Trinh, S. H. Kim, Y. S. Mok, Chem. Eng. J. 2016, 299, 93– 103.
- [11] A. L. Chiew, N. A. Buckley, Crit. Care 2014, 18, 221.
- [12] G. R. Parmar, N. N. Rao, Crit. Rev. Environ. Sci. Technol. 2008, 39, 41–78
- [13] A. Krishnamurthy, B. Adebayo, T. Gelles, A. Rownaghi, F. Rezaei, *Catal. Today* 2020, 350, 100–119.
- [14] S. Scirè, L. F. Liotta, Appl. Catal. B Environ. 2012, 125, 222–246.
- [15] A. C. Gluhoi, N. Bogdanchikova, B. E. Nieuwenhuys, J. Catal. 2005, 229, 154–162.
- [16] P. Gélin, M. Primet, Appl. Catal. B Environ. 2002, 39, 1–37.
- [17] T. Barakat, V. Idakiev, R. Cousin, G.-S. Shao, Z.-Y. Yuan, T. Tabakova, S. Siffert, Appl. Catal. B Environ. 2014, 146, 138–146.
- [18] S. Huang, C. Zhang, H. He, Catal. Today 2008, 139, 15–23.
- [19] V. P. Santos, S. A. C. Carabineiro, P. B. Tavares, M. F. R. Pereira, J. J. M. Órfão, J. L. Figueiredo, Appl. Catal. B Environ. 2010, 99, 198–205.
- [20] Liotta, L.F, Appl. Catal. B Environ. 2010, 100, 403–412.
- [21] A. C. Gluhoi, N. Bogdanchikova, B. E. Nieuwenhuys, Catal. Today 2006, 113, 178–181.
- [22] K. M. Saoud, M. S. El-Shall, Catalysts 2020, 10, 1351.
- [23] M. Hosseini, T. Barakat, R. Cousin, A. Aboukaïs, B.-L. Su, G. De Weireld, S. Siffert, Appl. Catal. B Environ. 2012, 111–112, 218–224.

- [24] R. Fiorenza, Catalysts 2020, 10, 661.
- [25] T. K. Nevanperä, S. Ojala, T. Laitinen, S. Pitkäaho, S. Saukko, R. L. Keiski, Catalysts 2019, 9, 603.
- [26] K.-J. Kim, H.-G. Ahn, Appl. Catal. B Environ. 2009, 91, 308–318.
- [27] A. Villa, D. Wang, D. S. Su, L. Prati, Catal. Sci. Technol. 2014, 5, 55-68.
- [28] T. Barakat, J. C. Rooke, D. Chlala, R. Cousin, J.-F. Lamonier, J.-M. Giraudon, S. Casale, P. Massiani, B.-L. Su, S. Siffert, *Catalysts* 2018, 8, 574
- [29] X. Fu, Y. Liu, W. Yao, Z. Wu, Catal. Commun. 2016, 83, 22-26.
- [30] B. Solsona, M. Pérez-Cabero, I. Vázquez, A. Dejoz, T. García, J. Álvarez-Rodríguez, J. El-Haskouri, D. Beltrán, P. Amorós, Chem. Eng. J. 2012, 187, 391–400.
- [31] M. M. Trandafir, A. Moragues, P. Amorós, V. I. Parvulescu, Catal. Today 2020, 355, 893–902.
- [32] M. Pérez-Cabero, J. E. Haskouri, B. Solsona, I. Vázquez, A. Dejoz, T. García, J. Álvarez-Rodríguez, A. Beltrán, D. Beltrán, P. Amorós, J. Mater. Chem. 2010, 20, 6780–6788.
- [33] A. Moragues, B. Puértolas, Á. Mayoral, R. Arenal, A. B. Hungría, S. Murcia-Mascarós, S. H. Taylor, B. Solsona, T. García, P. Amorós, J. Catal. 2018, 360, 187–200.
- [34] P. Peng, J. Li, S. Mo, Q. Zhang, T. Shen, Q. Xie, *Processes* **2021**, *9*, 230.
- [35] R. K. Dadi, D. Luss, V. Balakotaiah, *Chem. Eng. J.* **2016**, *304*, 941–952.
- [36] Q. Zhang, S. Mo, J. Li, Y. Sun, M. Zhang, P. Chen, M. Fu, J. Wu, L. Chen, D. Ye, Catal. Sci. Technol. 2019, 9, 4538–4551.
- [37] M. Pérez-Cabero, A. B. Hungría, J. M. Morales, M. Tortajada, D. Ramón, A. Moragues, J. E. Haskouri, A. Beltrán, D. Beltrán, P. Amorós, J. Nanoparticle Res. 2012, 14, 1045.
- [38] N. Fairley, V. Fernandez, M. Richard Plouet, C. Guillot-Deudon, J. Walton, E. Smith, D. Flahaut, M. Greiner, M. Biesinger, S. Tougaard, D. Morgan, J. Baltrusaitis, Appl. Surf. Sci. Adv. 2021, 5, 100112.
- [39] S. Tanuma, C. J. Powell, D. R. Penn, Surf. Interface Anal. 2003, 35, 268–275.
- [40] C. Colbea, D. Avram, B. Cojocaru, R. Negrea, C. Ghica, V. G. Kessler, G. A. Seisenbaeva, V. Parvulescu, C. Tiseanu, *Nanomaterials* 2018, 8, 988.
- [41] L.-H. Chang, N. Sasirekha, Y.-W. Chen, W.-J. Wang, Ind. Eng. Chem. Res. 2006, 45, 4927–4935.
- [42] Z. Tang, P. Liu, H. Cao, S. Bals, H. J. Heeres, P. P. Pescarmona, ACS Catal. 2019, 9, 9953–9963.
- [43] Y. Liu, H. Dai, J. Deng, S. Xie, H. Yang, W. Tan, W. Han, Y. Jiang, G. Guo. J. Catal. 2014. 309, 408–418.
- [44] Z. Han, L. Dai, Y. Liu, J. Deng, L. Jing, Y. Zhang, K. Zhang, X. Zhang, Z. Hou, W. Pei, H. Dai, Catal. Today 2021, 376, 134–143.
- [45] H. Yang, J. Deng, Y. Liu, S. Xie, Z. Wu, H. Dai, J. Mol. Catal. Chem. 2016, 414, 9–18.
- [46] S. Oh, S. Back, W. H. Doh, S. Y. Moon, J. Kim, Y. Jung, J. Y. Park, RSC Adv. 2017, 7, 45003–45009.
- [47] K. Balakrishnan, J. Schwank, J. Catal. 1992, 138, 491-499.
- [48] M. Haruta, M. Daté, Appl. Catal. Gen. 2001, 222, 427–437.
- [49] E. A. Redina, O. A. Kirichenko, A. A. Greish, A. V. Kucherov, O. P. Tkachenko, G. I. Kapustin, I. V. Mishin, L. M. Kustov, *Catal. Today* 2015, 246, 216–231.
- [50] N. F. P. Ribeiro, F. M. T. Mendes, C. A. C. Perez, M. M. V. M. Souza, M. Schmal, Appl. Catal. Gen. 2008, 347, 62–71.
- [51] B. Koslowski, H.-G. Boyen, C. Wilderotter, G. Kästle, P. Ziemann, R. Wahrenberg, P. Oelhafen, Surf. Sci. 2001, 475, 1–10.
- [52] S. Zhou, G. S. Jackson, B. Eichhorn, Adv. Funct. Mater. 2007, 17, 3099–3104.
- [53] J. H. Carter, X. Liu, Q. He, S. Althahban, E. Nowicka, S. J. Freakley, L. Niu, D. J. Morgan, Y. Li, J. W. (Hans) Niemantsverdriet, S. Golunski, C. J. Kiely, G. J. Hutchings, Angew. Chem. Int. Ed. 2017, 56, 16037–16041.
- [54] A. S. Aricò, A. K. Shukla, H. Kim, S. Park, M. Min, V. Antonucci, Appl. Surf. Sci. 2001, 172, 33–40.
- [55] S. Viéitez-Calo, D. J. Morgan, S. Golunski, S. H. Taylor, M. V. Twigg, Top. Catal. 2021, DOI 10.1007/s11244-021-01415-2.
- [56] R. P. Doherty, J.-M. Krafft, C. Méthivier, S. Casale, H. Remita, C. Louis, C. Thomas, J. Catal. 2012, 287, 102–113.
- [57] Y. Xu, Y. Dong, J. Shi, M. Xu, Z. Zhang, X. Yang, Catal. Commun. 2011, 13, 54–58.

WILEY. vch


RESEARCH ARTICLE

- [58] T. Garcia, S. Agouram, S. H. Taylor, D. Morgan, A. Dejoz, I. Vázquez, B. Solsona, Catal. Today 2015, 254, 12–20.
- [59] F. Schüth, Phys. Status Solidi B 2013, 250, 1142-1151.
- [60] M.-Y. Kim, J.-S. Choi, T. J. Toops, E.-S. Jeong, S.-W. Han, V. Schwartz, J. Chen, Catalysts 2013, 3, 88–103.
- [61] K.-J. Kim, S.-I. Boo, H.-G. Ahn, J. Ind. Eng. Chem. 2009, 15, 92–97.
- [62] H. Qin, X. Qian, T. Meng, Y. Lin, Z. Ma, Catalysts 2015, 5, 606–633.
- [63] S. K. Jain, E. M. Crabb, L. E. Smart, D. Thompsett, A. M. Steele, *Appl. Catal. B Environ.* 2009, 89, 349–355.
- [64] L. Ilieva, A. M. Venezia, P. Petrova, G. Pantaleo, L. F. Liotta, R. Zanella, Z. Kaszkur, T. Tabakova, Catalysts 2018, 8, 283.
- [65] T. Tabakova, L. Ilieva, P. Petrova, A. M. Venezia, Y. Karakirova, L. F. Liotta, G. Avdeev, Appl. Sci. 2020, 10, 1088.
- [66] S. W. Chee, J. M. Arce-Ramos, W. Li, A. Genest, U. Mirsaidov, Nat. Commun. 2020, 11, 2133.
- [67] Y.-F. Y. Yao, J. Catal. 1984, 87, 152-162.
- [68] D. Chlala, M. Labaki, J.-M. Giraudon, O. Gardoll, A. Denicourt-Nowicki, A. Roucoux, J.-F. Lamonier, Comptes Rendus Chim. 2016, 19, 525–537.
- [69] M. Haruta, S. Tsubota, T. Kobayashi, H. Kageyama, M. J. Genet, B. Delmon, J. Catal. 1993, 144, 175–192.
- [70] H. Ha, H. An, M. Yoo, J. Lee, H. Y. Kim, J. Phys. Chem. C 2017, 121, 26895–26902.
- [71] A. Buzková Arvajová, J. Březina, R. Pečinka, P. Kočí, Appl. Catal. B Environ. 2018, 233, 167–174.
- [72] A.-C. Yang, V. Streibel, T. S. Choksi, H. Aljama, B. Werghi, S. R. Bare, R. S. Sánchez-Carrera, A. Schäfer, Y. Li, F. Abild-Pedersen, M. Cargnello, J. Catal. 2021, 401, 89–101.
- [73] A. Aznárez, A. Gil, S. A. Korili, RSC Adv. 2015, 5, 82296–82309.
- [74] N. Radic, B. Grbic, A. Terlecki-Baricevic, Appl. Catal. B Environ. 2004, 50, 153–159.
- [75] L. Lu, Y. Nie, Y. Wang, G. Wu, L. Li, J. Li, X. Qi, Z. Wei, J. Mater. Chem. A 2018, 6, 104–109.
- [76] S. Eaimsumang, N. Chollacoop, A. Luengnaruemitchai, S. H. Taylor, Front. Chem. 2022, 10.
- [77] E. Genty, J. Brunet, C. Poupin, S. Ojala, S. Siffert, R. Cousin, *Appl. Catal. B Environ.* 2019, 247, 163–172.
- [78] M. Piumetti, D. Fino, N. Russo, Appl. Catal. B Environ. 2015, 163, 277–287.
- [79] E. Sartoretti, F. Martini, M. Piumetti, S. Bensaid, N. Russo, D. Fino, Catalysts 2020, 10, 165.
- [80] G. Rochard, L. Olivet, M. Tannous, C. Poupin, S. Siffert, R. Cousin, Catalysts 2021, 11, 1218.
- [81] S. M. Saqer, D. I. Kondarides, X. E. Verykios, *Top. Catal.* 2009, *52*, 517–527
- [82] Y. Shen, J. Deng, X. Hu, X. Chen, H. Yang, D. Cheng, D. Zhang, *Environ. Sci. Technol.* 2023, 57, 1797–1806.
- [83] S. Ali, L. Chen, F. Yuan, R. Li, T. Zhang, S. ul H. Bakhtiar, X. Leng, X. Niu, Y. Zhu, Appl. Catal. B Environ. 2017, 210, 223–234.
- [84] B. Puértolas, Á. Mayoral, R. Arenal, B. Solsona, A. Moragues, S. Murcia-Mascaros, P. Amorós, A. B. Hungría, S. H. Taylor, T. García, ACS Catal. 2015, 5, 1078–1086.



RESEARCH ARTICLE

Entry for the Table of Contents



ZrO₂/UVM-7 catalysts supported with Au and Pt nanoparticles were assessed for the simultaneous total oxidation of a mixture of volatile organic pollutants, representative of automotive emissions during cold-start conditions. The loadings of Pt nanoparticles on the catalyst surface, as well as the synthesis method, were controlling factors for catalytic activity.