

This is an Open Access document downloaded from ORCA, Cardiff University's institutional repository: <https://orca.cardiff.ac.uk/id/eprint/98567/>

This is the author's version of a work that was submitted to / accepted for publication.

Citation for final published version:

Zhang, Wangyu, Deng, Bailin , Zhang, Juyong, Bouaziz, Sofien and Liu, Ligang 2015. Guided mesh normal filtering. Computer Graphics Forum 34 (7) , pp. 23-34. 10.1111/cgf.12742

Publishers page:

Please note:

Changes made as a result of publishing processes such as copy-editing, formatting and page numbers may not be reflected in this version. For the definitive version of this publication, please refer to the published source. You are advised to consult the publisher's version if you wish to cite this paper.

This version is being made available in accordance with publisher policies. See <http://orca.cf.ac.uk/policies.html> for usage policies. Copyright and moral rights for publications made available in ORCA are retained by the copyright holders.



Guided Mesh Normal Filtering: Supplementary Material

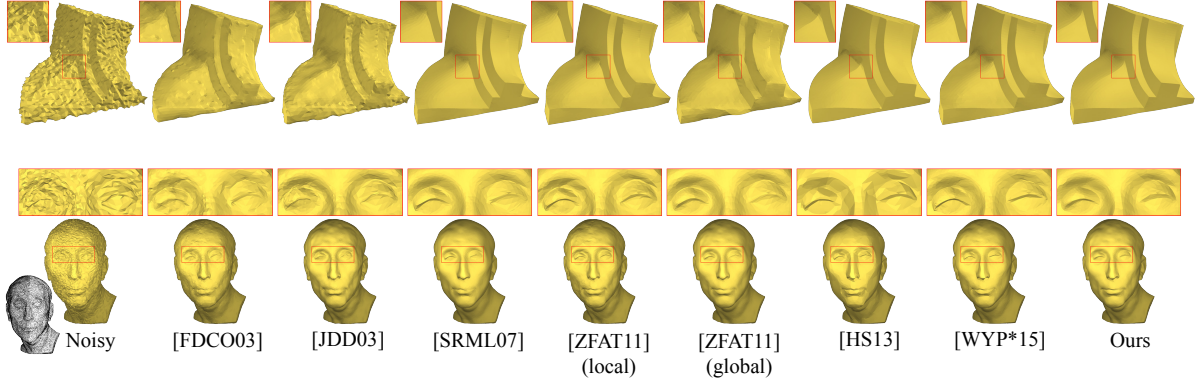


Figure A: Comparison of denoising algorithms for meshes with additive Gaussian noise. The intensity σ_E of the noise is from top to bottom 0.3 and 0.2.

1 More results

In Fig. A we provide more results of denoising meshes with additive Gaussian noise. The corresponding error metrics are provided in Table A.

Model	Error	[FDCO03]	[JDD03]	[SRML07]	[ZFAT11](l)	[ZFAT11](g)	[HS13]	[WYP*15]	Ours
Fandisk	δ	9.73	9.82	4.40	3.35	6.43	5.53	3.67	2.78
	$\mathcal{D}_{\text{mean}}$	$1.34 \cdot 10^{-2}$	$1.21 \cdot 10^{-2}$	$7.45 \cdot 10^{-3}$	$6.18 \cdot 10^{-3}$	$9.42 \cdot 10^{-3}$	$1.46 \cdot 10^{-2}$	$5.74 \cdot 10^{-3}$	$5.16 \cdot 10^{-3}$
	$\mathcal{D}_{\text{max}}$	$2.94 \cdot 10^{-1}$	$2.61 \cdot 10^{-1}$	$2.35 \cdot 10^{-1}$	$2.25 \cdot 10^{-1}$	$2.53 \cdot 10^{-1}$	$2.59 \cdot 10^{-1}$	$2.12 \cdot 10^{-1}$	$2.09 \cdot 10^{-1}$
Nicolo	δ	8.88	7.13	6.38	6.74	5.79	7.66	7.05	6.10
	$\mathcal{D}_{\text{mean}}$	$3.47 \cdot 10^{-1}$	$2.74 \cdot 10^{-1}$	$2.32 \cdot 10^{-1}$	$2.06 \cdot 10^{-1}$	$2.01 \cdot 10^{-1}$	$2.87 \cdot 10^{-1}$	$2.17 \cdot 10^{-1}$	$1.97 \cdot 10^{-1}$
	$\mathcal{D}_{\text{max}}$	1.77	1.25	1.47	1.06	1.26	1.35	1.35	1.30

Table A: Error metrics for different methods. For each model, the best error metric value is highlighted in bold.

2 Parameters for denoising methods

Tables B to I provide the parameters for the methods compared in our paper. These parameters are applied to the denoising of the following models:

- In the paper:
 - Fig. 7: Fandisk ($\sigma_E = 0.7$), Julius, Sphere, Bunny.
 - Fig. 8: Block.
 - Fig. 9: Twelve.

Parameter	Fandisk(0.3)	Fandisk(0.7)	Julius	Sphere	Bunny	Nicolo	Block	Twelve	Angel	Rabbit	Iron
k_{iter}	10	10	15	17	12	12	15	12	10	13	100

Table B: Parameters used for [FDCO03].

Parameter	Fandisk(0.3)	Fandisk(0.7)	Julius	Sphere	Bunny	Nicolo	Block	Twelve	Angel	Rabbit	Iron
$\sigma_f/\ e\ $	1.3	1.6	1.3	1.8	1.2	1.4	1.3	1.2	1.2	1.3	3.8
$\sigma_g/\ e\ $	1.4	1.5	1.4	1.5	1.5	1.6	1.2	1.4	1.5	1.2	2.8

Table C: Parameters used for [JDD03].

Parameter	Fandisk(0.3)	Fandisk(0.7)	Julius	Sphere	Bunny	Nicolo	Block	Twelve	Angel	Rabbit	Iron
T	0.55	0.3	0.6	0.55	0.5	0.5	0.4	0.4	0.5	0.35	0.4
k_{iter}	20	30	10	30	5	8	30	15	6	4	20
v_{iter}	40	20	10	20	20	8	20	10	8	4	20

Table D: Parameters used for [SRML07].

Parameter	Fandisk(0.3)	Fandisk(0.7)	Julius	Sphere	Bunny	Nicolo	Block	Twelve	Angel	Rabbit	Iron
σ_s	0.35	0.4	0.45	0.45	0.5	0.45	0.35	0.33	0.4	0.35	0.35
k_{iter}	25	50	6	10	6	6	45	40	6	4	20
v_{iter}	20	20	4	8	20	6	20	20	6	4	10

Table E: Parameters used for [ZFAT11] (local).

- Fig. 10: Angel, Rabbit, Iron.
- In this supplementary material:
 - Fig. A: Fandisk ($\sigma_E = 0.3$), Nicolo.

2.1 Explanation of parameters

- [FDCO03] (Table B):
 - k_{iter} : number of iterations.
- [JDD03] (Table C):
 - $\sigma_f/\|e\|$, $\sigma_g/\|e\|$: parameters that determine the variance for spatial and range kernels, with $\|e\|$ being the average edge length.
- [SRML07] (Table D):
 - T : threshold for controlling the averaging weights (see Equation (8) of [SRML07]).
 - k_{iter} : number of iterations for updating normals.
 - v_{iter} : number of iterations for a vertex update.
- Local scheme of [ZFAT11] (Table E):
 - σ_s : variance parameter for the spatial kernel.
 - k_{iter} : number of iterations for updating normals.
 - v_{iter} : number of iterations for a vertex update.
- Global scheme of [ZFAT11] (Table F):
 - σ_s : variance parameter for the spatial kernel.
 - λ : smoothness parameter in the target function.
 - v_{iter} : number of iterations for a vertex update.

Parameter	Fandisk(0.3)	Fandisk(0.7)	Julius	Sphere	Bunny	Nicolo	Block	Twelve	Angel	Rabbit	Iron
σ_s	0.35	0.45	0.45	0.45	0.5	0.5	0.38	0.38	0.4	0.35	0.35
λ	0.0001	0.0001	0.001	0.005	0.01	0.01	0.0002	0.0002	0.01	0.0001	0.0001
v_{iter}	20	30	5	15	20	8	18	20	6	4	10

Table F: Parameters used for [ZFAT11] (global).

Parameter	Fandisk(0.3)	Fandisk(0.7)	Julius	Sphere	Bunny	Nicolo	Block	Twelve	Angel	Rabbit	Iron
λ	0.01	0.01	0.000003	0.1	0.000004	0.6	0.55	5	0.0005	0.0035	0.0001
α_0	0.00346	1.0	0.00107	0.00206	1.0	0.00149	0.00389	0.00351	0.000924	0.000809	0.000912
β_0	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
μ_α	0.5	0.9	0.5	0.5	0.8	0.5	0.5	0.5	0.5	0.5	0.5
μ	1.414	1.414	1.414	1.414	1.414	1.414	1.414	1.2	1.414	1.414	1.414
β_{max}	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000

Table G: Parameters used for [HS13].

Parameter	Fandisk(0.3)	Fandisk(0.7)	Julius	Sphere	Bunny	Nicolo	Block	Twelve	Angel	Rabbit	Iron
σ_{s1}	0.35	0.4	0.45	0.45	0.5	0.3	0.35	0.3	0.4	0.35	0.35
k_{iter}	20	50	6	6	5	6	50	75	5	4	20
σ_{s2}	0.3	0.3	0.4	0.4	0.45	0.35	0.3	0.3	0.35	0.35	0.3
v_{iter}	14	20	4	6	20	4	20	20	4	4	10

Table H: Parameters used for [WYP*15].

Parameter	Fandisk(0.3)	Fandisk(0.7)	Julius	Sphere	Bunny	Nicolo	Block	Twelve	Angel	Rabbit	Iron
r	0.12 (2 $\times$)	0.18 (2.6 $\times$)	-	0.8 (2 $\times$)	0.015 (2.7 $\times$)	3.4 (2 $\times$)	0.8 (2 $\times$)	0.116 (2 $\times$)	0.12 (2 $\times$)	0.6 (2 $\times$)	0.00564 (2 $\times$)
σ_r	0.25	0.3	0.45	0.45	0.55	0.35	0.3	0.2	0.3	0.35	0.4
k_{iter}	25	50	5	30	4	6	40	75	3	4	20
v_{iter}	20	20	4	20	15	6	30	20	2	4	10

Table I: Parameters used for our approach.

- [HS13] (Table G):
 - λ : weight for the L_0 term in the target function.
 - α_0, β_0 : initial values for α and β in Algorithm 1 of [HS13].
 - μ_α, μ : update ratios for α and β .
 - β_{max} : maximum value of β .
- [WYP*15] (Table H):
 - σ_{s1} : parameter for local face normal initialization.
 - k_{iter} : number of iterations for normal update in the local face normal initialization..
 - σ_{s2} : parameter for global face normal refinement.
 - v_{iter} : number of iterations for a vertex update.
- Ours (Table I): spatial variance is always chosen as the average distance between neighboring face centroids. Below are the tunable parameters:
 - r : radius for the geometrical neighborhood, also shown as the ratio with respect to the average distance between neighboring face centroids; not applicable if a topological neighborhood is used..
 - σ_r : variance of the range kernel.
 - k_{iter} : number of iterations for updating normals.
 - v_{iter} : number of iterations for a vertex update.

References

- [FDCO03] FLEISHMAN S., DRORI I., COHEN-OR D.: Bilateral mesh denoising. *ACM Trans. Graph.* 22, 3 (2003).
- [HS13] HE L., SCHAEFER S.: Mesh denoising via l0 minimization. *ACM Trans. Graph.* 32, 4 (2013), 64:1–64:8.
- [JDD03] JONES T. R., DURAND F., DESBRUN M.: Non-iterative, feature-preserving mesh smoothing. *ACM Trans. Graph.* 22, 3 (2003), 943–949.
- [SRML07] SUN X., ROSIN P. L., MARTIN R. R., LANGBEIN F. C.: Fast and effective feature-preserving mesh denoising. *IEEE Trans. Vis. Comput. Graphics* 13, 5 (2007), 925–938.
- [WYP*15] WEI M., YU J., PANG W.-M., WANG J., QIN J., LIU L., HENG P.-A.: Bi-normal filtering for mesh denoising. *IEEE Trans. Vis. Comput. Graphics* 21, 1 (2015), 43–55.
- [ZFAT11] ZHENG Y., FU H., AU O.-C., TAI C.-L.: Bilateral normal filtering for mesh denoising. *IEEE Trans. Vis. Comput. Graphics* 17, 10 (2011), 1521–1530.